

LANmark Industri kontakt for DIN-skinne

LANmark Industry module DIN-rail mount with 1 Maritime Snap-In
Category 7A grey

Nexans art.nr.: N20m.001

El.nr.: 6916901

GTIN: 3427610084959

- For DIN-Rail mount (35mm)
- Data connection for industrial and maritime environments
- Easy termination, without punch down tool.
- Includes Mount + LANmark-7A Maritime shielded connector
- For technical enclosures, Wireless Access Points, Industrial cabinets

BESKRIVELSE

Application

The LANmark Industry DIN-Rail mount is designed to enable the installation of LANmark-7A Maritime Snap-in data connectors in industrial cabinets fitted with a 35mm DIN-Rail. Several DIN-Rail mounts can be joined together to form a row. The LANmark-7A connector exceeds the requirements of ISO/IEC 11801:2011. As such it supports all data applications defined for Cat 5, Cat 5e, Cat.6, Cat 6A and Cat 7A, such as:

- 10baseT
- Fast Ethernet
- Gigabit Ethernet
- 10 Gigabit Ethernet
- 155 ATM
- 622 ATM
- 1.2 ATM
- Industrial Ethernet


Performance

The LANmark-7A Snap-in connector has been designed to reach the highest performance in Category 7A and is part of the NCS DNV certified Maritime cabling products range.

Installation

The LANmark-7A Snap-in connector is designed to be terminated without punchdown tool. For fast and easy installation an optional comfort tool can be used.

- Fast termination
- Colour code : TSB568A & TSB568B
- Can be used with all types of cables : UTP, F/UTP, SF/UTP and S/FTP
- Accepts 24, 23 and 22 AWG cable, PUR, LSZH
- For all LANmark industrial and maritime cables

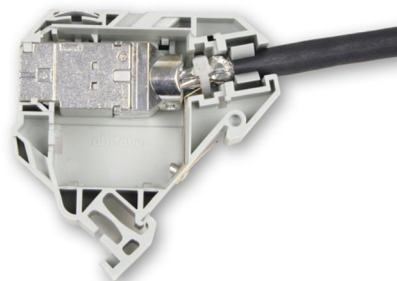

LANmark
Industry



Motstandsevne støt
Svak



Elektromagnetisk interferens
motstand
Ja



Minimum driftstemperatur
0 °C



Maks. Kontinuerlig
ledertemperatur
70 °C



Vanntett
No



RoHS-godkjent
Ja

Alle tegninger, design, spesifikasjoner, planer og opplysninger om vekt, størrelse og dimensjoner angitt i tekniske eller markedsføringsdokumenter utgitt av eller på vegne av Nexans er kun veiledende og skal ikke være bindende for Nexans eller behandles som en representasjon fra Nexans side.

Generert 02.09.21 www.nexans.no Side 1 / 2

Nexans

LANmark Industri kontakt for DIN-skinne

LANmark Industry module DIN-rail mount with 1 Maritime Snap-In
Category 7A grey

KARAKTERISTIKKER

Konstruksjonsegenskaper

Konnektor type	Snap-In
Skjerm	Ja
Kabelinngang	From the top
Farge	Grå
Materiale	ABS

Dimensjonsegenskaper

Length cable end on inner side	80 mm
Antall kabler	1
Høyde	77,8 mm
Bredde	18 mm
Dybde	65 mm
Veggtykkelse (mm)	1,6 mm
Vekt pr. stk. (ca.)	0,03 kg
Skruedimensjoner	N/A
Number of screws	0

Elektriske egenskaper

Maksimal drifts frekvens	1000 MHz
Karakteristisk impedans	100 Ohm

Mekaniske egenskaper

Motstandsevne støt	Svak
--------------------	------

Bruksegenskaper

Funksjonsbeskrivelse komponent	Cabling and Connectivity solutions
Bruksområde	Industrielle installasjoner
Antall porter	1
Kategori	Cat. 7A
Elektromagnetisk interferens motstand	Ja
Forpakning	Plastic bag
Minimum driftstemperatur	0 °C
Maks. Kontinuerlig ledertemperatur	70 °C
Vann tett	No
RoHS-godkjent	Ja

SALGS- OG LEVERINGSINFORMASJON

The LANmark-7A DIN-Rail Mount is fitted with an earthing key. Please read the indstallation guidelines for proper grounding connection to the DIN-Rail. Set of covers (right-left) available (N20i.002)