

Select your language

- [German](#)
- [English](#)
- [Spanish](#)
- [French](#)
- [Dutch](#)
- [Italian](#)
- [Polish](#)
- [Czech](#)
- [Russian](#)
- [Norwegian Bokmål](#)

Worldwide English



E58-18DP100-HLP- Diffuse reflective sensor, Sn=100mm, 4L, 10-30VDC, light, NPN, PNP, M18, metal, M12



135667 E58-18DP100-HLP

[Overview](#) [Specifications](#) [Resources](#)



135667 E58-18DP100-HLP

Diffuse reflective sensor, Sn=100mm, 4L, 10-30VDC, light, NPN, PNP, M18, metal, M12

Alternate Catalog No.

E58-18DP100-HLP

EL-Nummer (Norway)

4315342

E58 series, product features: sensors with a diameter of 18 mm or 30 mm. Highly refined optics for long sensing ranges and to see through high levels of contamination – unmatched optical performance. Perfect Prox® technology provides exceptional background rejection and extremely high excess gain. Resistant to many chemicals used in the automotive, food processing and forest products industries. Suitable for high temperature, high pressure washdown (82 bar). mechanical Viton gaskets are resistant to extreme temperature variations. Visible sensing beam on all models lets you see where the beam is aimed for quick flush mounting and alignment. The function display is the brightest available and is visible from any angle and in any lighting condition.

• [Delivery program](#)

• [Technical data](#)

• [Design verification as per IEC/EN 61439](#)

• [Technical data ETIM 7.0](#)

• [Approvals](#)

• [Dimensions](#)

Delivery program

Basic function

Optical sensors

Product range

E58 Harsh Duty Series

For connection of:

Plug-in connection M12 x 1

Design (outer dimensions)

M18 x 1 mm

Rated operational voltage [U_b]

10 - 30 V DC

Rated switching distance [S_n]

100 mm

Description

with background suppression (Perfect Prox)

Connection

4-wire

Function

Reflected-light beam

Type of light

Visible red

Material

Stainless steel

Switching type

NPN

PNP

Switching principle

Light switching

Information relevant for export to North America

Product Standards UL 508; CSA-C22.2 No. 14; IEC60947-5-2; CE marking

UL File No. E166051

UL Category Control No. NRKH, NRKH7

CSA File No. UL report applies to both Canada and US

CSA Class No. –

North America Certification UL listed, certified by UL for use in Canada

Max. Voltage Rating 30 V DC

Degree of Protection IEC: IP68, IP69K; UL/CSA Type: 1, 2, 3, 3R, 3S, 4, 4x, 6, 6P, 12, 12K, 13

Technical data

General

Standards

IEC/EN 60947-5-2

Ambient temperature

-40 - +55

Mechanical shock resistance

100

Shock duration 3 ms g

Degree of Protection

IP69

Characteristics

Rated switching distance Rated switching distance [S_n]

100 mm

Range

0.1 mm

Rated operational voltage [U_b]

10 - 30 V DC

Maximum load current [I_b]

< PNP: 100

NPN: 250 mA

Response time

1 ms

Switching state display

Red LED

Protective functions

Short-circuit protective device

Protection against polarity reversal

Protection against wire breakage

Connection

4-wire

Style Design (outer dimensions)

M18 x 1 mm

For connection of:

Plug-in connection M12 x 1

Material

Stainless steel

Design verification as per IEC/EN 61439

Operating ambient temperature min.

-40 °C

Operating ambient temperature max.

+55 °C

Technical data ETIM 7.0

Sensors (EG000026) / Light scanner with background masking (EC002719)

Electric engineering, automation, process control engineering / Binary sensor technology, safety-related sensor technology / Optoelectronic sensor / Light scanner w. background masking (ecl@ss10.0.1-27-27-09-04 [AKP253013])

Adjustment range

0 - 100 mm

Operating distance

0 - 0 mm

Triangulation

Background fade-out

Pre failure notice
 No
 With time function
 No
 Rated switching distance
 100 mm
 Max. switching distance
 127 mm
 Max. output current
 250 mA
 Reflector included
 No
 Analogue output 0 V ... 10 V
 No
 Analogue output 0 mA ... 20 mA
 No
 Analogue output 4 mA ... 20 mA
 No
 Analogue output -10 V ... +10 V
 No
 With other analogue output
 No
 Setting procedure
 Other
 With communication interface analogue
 No
 With communication interface AS-Interface
 No
 With communication interface CANOpen
 No
 With communication interface DeviceNet
 No
 With communication interface Ethernet
 No
 With communication interface INTERBUS
 No
 With communication interface PROFIBUS
 No
 With communication interface RS-232
 No
 With communication interface RS-422
 No
 With communication interface RS-485
 No
 With communication interface SSD
 No
 With communication interface SSI
 No
 Number of semiconductor outputs with signalling function
 2
 Number of contact energized outputs with signalling function
 0
 Number of protected semiconductor outputs
 0
 Number of protected contact energized outputs
 0
 Type of interface for safety communication
 Other
 Type of electric connection
 Connector M12
 Type of switching output
 PNP/NPN
 Type of switch function
 Other
 Operation agent-safety class
 Safety class 2
 Explosion safety category for gas
 None
 Explosion safety category for dust

None
 Construction type housing
 Cylinder, screw-thread
 Width sensor
 0 mm
 Diameter sensor
 18 mm
 Height of sensor
 0 mm
 Length of sensor
 80 mm
 Sensing mode
 Light switching
 Material of optical surface
 Glass
 Material housing
 Metal
 Max. output current at protected output
 0 mA
 Min. reflector distance
 0 mm
 Ambient temperature
 -40 - 55 °C
 Time of reaction
 1 ms
 Transmission range of the safety field
 0 m
 Switching frequency
 500 Hz
 Type of safety acc. IEC 61496-1
 "Switching voltage of OSSD at state ""high""
 30 V
 Rated control supply voltage U_s at AC 50Hz
 0 - 0 V
 Rated control supply voltage U_s at AC 60Hz
 0 - 0 V
 Rated control supply voltage U_s at DC
 10 - 30 V
 Voltage type
 DC
 With monitoring function downstream switching devices
 No
 Laser protection class
 None
 Wavelength of the sensor
 660 nm
 Type of light
 Other
 Light dot
 0 mm²
 AWG-number
 0
 Material of cable sheath
 Other
 With restart blockage
 No
 Suitable for safety functions
 No
 Degree of protection (IP)
 IP67

Approvals

Product Standards
 UL 508; CSA-C22.2 No. 14; IEC60947-5-2; CE marking
 UL File No.
 E166051
 UL Category Control No.
 NRKH, NRKH7

CSA File No.
UL report applies to both Canada and US
CSA Class No.
—
North America Certification
UL listed, certified by UL for use in Canada
Max. Voltage Rating
30 V DC
Degree of Protection
IEC: IP68, IP69K; UL/CSA Type: 1, 2, 3, 3R, 3S, 4, 4x, 6, 6P, 12, 12K, 13

Dimensions



□ M12 plug-in connection: 178 ±25


Product photo



3D drawing



Dimensions single product

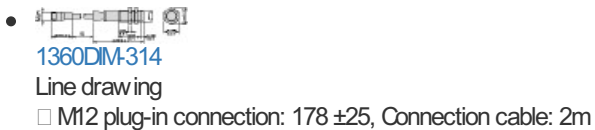

Instruction Leaflet

- [Optical sensors: E58 Series \(IL05305003Z\)](#)
Asset
(PDF, multilingual)

Declaration of Conformity

EU

- [Photoelectric Sensors, E58 Series \(DC\) \(DA-DC-00002425\)](#)
Asset
(PDF)

Download-Center

- [Download-Center \(this item\)](#)
Eaton EMEA Download-Center - download data for this item
- [Download-Center](#)
Eaton EMEA Download-Center

 [Generate data sheet in PDF format](#)

 [Generate data sheet in Excel format](#)



[Write a comment](#)

[Imprint](#) [Privacy Policy](#) [Legal Disclaimer](#) [Terms and Conditions](#)

© 2021 by Eaton Industries GmbH

