


MAGNETISK REAKTOR FOR DAMPLAMPER KVIKKSØLV


35–2000 W, 230 V, 240 V, 230/240 V, 400V 50 Hz

- Tilfredsstiller EN 61347-2-9 og EN 60923
- 100% kvalitetskontrollert
- Lave harmoniske
- Doble tilkoblingsklemmer uten skruing
- Svært små magnetiske felter
- Lavt effekttap
- Lang levetid

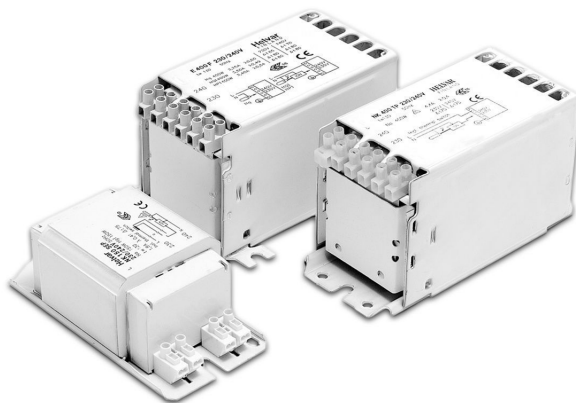


MÅLTEGNING

Dimensjoner	1	2	3	4	5
Tegning	a	b	c	c	d
Lengde 'a' (mm)	114.0	135.0	104.0	104.0	145.0
Bredde 'b' (mm)	54.0	70.0	70.0	70.0	69.0
Høyde 'c' (mm)	45.5	85.0	85.0	85.0	53.0
'd' (mm)	95.0	120.0	90.0	90.0	120.0
'e' (mm)		35.0	90.0	90.0	
'f' (mm)		108.0	108.0	85.0	
'g' (mm)			80.0	80.0	

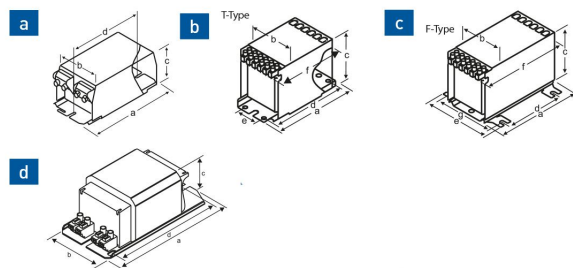

KOBLINGSSKJEMA

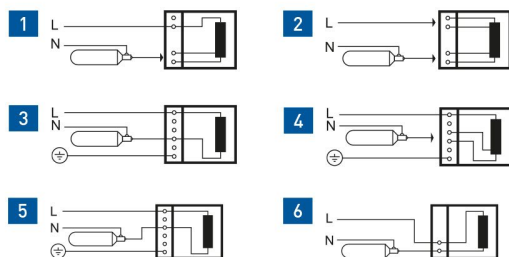

DATATABELL

El-nr	Type	Effekt (W)	Spennings (V)	Lampe type	Vekt (g)	Lampe strøm (A)	Koblings-skjema	Dimen-sjon
35 321 13	E250SE	250	230	HM	1860	2.13	6	5
35 321 12	E250T	250	230/240	HM	2100	2.13	3	2
35 321 22	E250F	250	230/240	HM	2100	2.13	4	4
35 321 14	E400T	400	230/240	HI/HM	3160	3.25	3	2
35 321 24	E400F	400	230/240	HI/HM	3160	3.25	5	3
35 321 06	E80/50LU	80/50	230/240	HM	1220	0.80/0.62	2	1
35 321 08	E125/80LU	125/80	230/240	HM	1220	1.15/0.80	1	1