

# XLED PRO ONE Plus

Anthracite

EAN 4007841 069544

Article number 069544



LED

long life LED  
50.000 h

3000 K

3000K  
warm-white

IP44



Panel 180° vertical

indoor/outdoor  
lightnetworkable via  
cable

energy saving

plastic free  
packaging

5 years

 manufacturer's  
warranty  
steinel-professional.de/garantie


## Function description

Floodlights redefined. Housed in a sophisticated aluminium enclosure, the 180° vertically swivelling floodlight XLED PRO ONE Plus without sensor guarantees daylight-bright illumination across large areas with warm white 3000 K and 4630 lm at 33,9 W. Suitable for manual switch operation and for cable-based networking in conjunction with a sensor version. With optional surface-mounting adapter. 5-year guarantee.

## Technical specifications

Dimensions (L x W x H)	202 x 259 x 226 mm
Mains power supply	220 – 240 V / 50 – 60 Hz
Output	33,9 W
Interconnection	Yes
Luminous flux	4630 lm
Colour temperature	3000 K
Colour variation LED	SDCM3
Colour Rendering Index	80-89
With lamp	Yes, STEINEL LED system
Lamp	LED cannot be replaced
LED cooling system	Passive Thermo Control
With motion detector	No
Photo-cell controller	No
Basic light level function	No

Main light adjustable	No
Functions	Relay Output
Impact resistance	IK03
IP-rating	IP44
Protection class	I
Ambient temperature	-20 – 40 °C
Housing material	Aluminium
Cover material	Glass transparent
Manufacturer's Warranty	5 years
Includes corner wall mount	No
PU1, net weight	1,69 kg
Version	Anthracite
PU1, EAN	4007841069544

## Accessories

EAN 4007841 080983      Surface mount adapter XLED PRO ONE Plus + Max

# XLED PRO ONE Plus


Anthracite

EAN 4007841 069544


Article number 069544



## Dimension Drawing

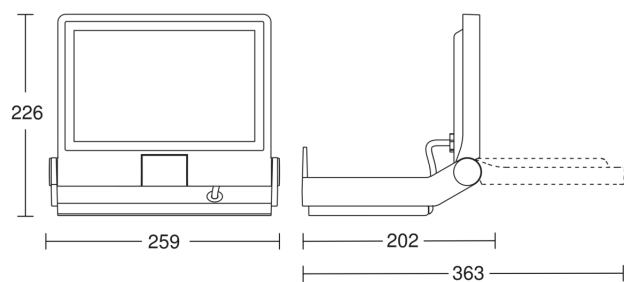

## Slave circuit diagram



## Master/slave interconnection circuit diagram

