

XLED PRO ONE

Anthracite

EAN 4007841 069513

Article number 069513



LED

long life LED
50.000 h

3000 K

3000K
warm-white

IP44



Panel 180° vertical

indoor/outdoor
lightnetworkable via
cable

energy saving

plastic free
packaging

5 years

manufacturer's
warranty
steinel-professional.de/garantie

Function description

Floodlights redefined. Housed in a sophisticated aluminium enclosure, the 180° vertically swivelling floodlight XLED PRO ONE without sensor guarantees daylight-bright illumination across large areas with warm white 3000 K and 2250 lm at 18,2 W. Suitable for manual switch operation and for cable-based networking in conjunction with a sensor version. With optional surface-mounting adapter. 5-year guarantee.

Technical specifications

Dimensions (L x W x H)	182 x 229 x 206 mm
Mains power supply	220 – 240 V / 50 – 60 Hz
Output	18,2 W
Interconnection	Yes
Luminous flux	2250 lm
Colour temperature	3000 K
Colour variation LED	SDCM3
Colour Rendering Index	80-89
With lamp	Yes, STEINEL LED system
Lamp	LED cannot be replaced
LED cooling system	Passive Thermo Control
With motion detector	No
Photo-cell controller	No
Basic light level function	No

Main light adjustable	No
Functions	Relay Output
Impact resistance	IK03
IP-rating	IP44
Protection class	I
Ambient temperature	-20 – 40 °C
Housing material	Aluminium
Cover material	Glass transparent
Manufacturer's Warranty	5 years
Includes corner wall mount	No
PU1, net weight	1,38 kg
Version	Anthracite
PU1, EAN	4007841069513

XLED PRO ONE


Anthracite

EAN 4007841 069513


Article number 069513



Dimension Drawing

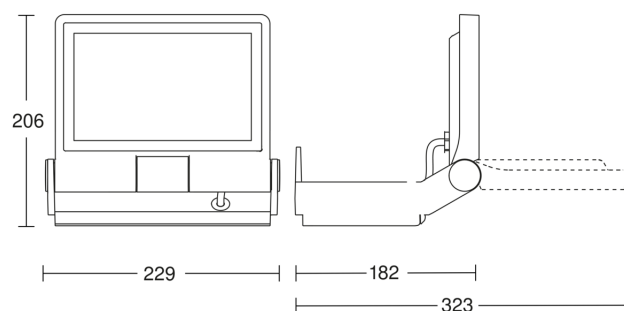

Slave circuit diagram



Master/slave interconnection circuit diagram

