



### Features and Benefits

Molex's OFFICE BLOCK was designed in accordance with TSB75 and is the ideal solution for open office cabling. This attractive and compact 2 port RJ45 unit facilitates a simple, organised installation for areas where space is limited.

A protected labelling facility accepts 6mm labelling tapes and the interior of the unique hinged cover of the unit, provides a write-on surface for port identification. The product is provided with snap-on shutters recommended for connector protection.

The block can be fitted using screws (not provided) or located on metal desks or filing cabinets with magnets (provided). Cable is installed from the sides or the rear of the block, using the knockouts provided and is retained by the unique strain relief feature which obviates the requirement for cable ties.

Dual colour coding of the IDC blocks provides the option of 568A or 568B wiring., the Cat 5E RJSE connector is PowerSum compliant.

- Compact, attractive and versatile 2 port surface mount block
- Cable entry from side and rear knockouts
- Labelling facility
- Mounts with screws or magnet
- Shuttered
- PowerSum compliant
- Suitable for high speed data transmission
- Cover optionally removable to facilitate installation

### Technical Information

#### Mechanical

##### Jack Connector

Operating Life : Minimum 500 insertion cycles  
 Contact Material : BrCu  
 Contact Plating : UL 94V0 Thermoplastic

##### IDC Connector

Operating Life : Minimum 100 Reterminations  
 Contact material : Copper based alloy  
 Contact Plating : Sn/Pb over Ni  
 Wire Size : 2 x 22-26 AWG solid or stranded

#### Shutter

Rated for 1000 cycles

#### IDC Terminations

Suitable for 0.4mm - 0.6mm solid or stranded cable, maximum o.d 1.5mm. Two wires may be terminated for daisy-chain applications.


#### Electrical

D.C. Resistance :	<20 mΩ
D.C. Resistance Imbalance :	<2.0 mΩ
Insulation Resistance :	>100MΩ
Attenuation (dB) @ 1MHz	0.0121
@ 16MHz	0.0193
@ 100MHz	0.1052
Crosstalk (dB) @ 1MHz	-90.00
pair to pair @ 16MHz	-72.00
@ 100MHz	-46.00
PowerSum Worst Pair (dB) @ 100MHz	-42.00
Return Loss (dB) @ 1MHz	-59
@ 16MHz	-45
@ 100MHz	-25.5

Shipping weight (each) 60gms

#### Dimensions

80mm(L) x 60mm(W) x 23mm(H)

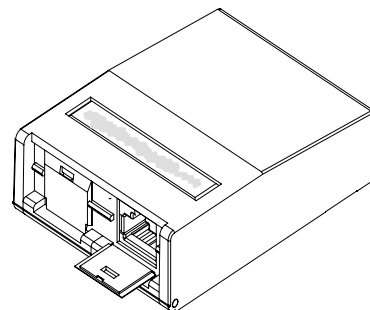

Order No.	Description
SID-00010-02	OFFICE BLOCK 2 Port RJ45 RJSE PowerCat, shuttered with magnet White 568A/B UTP Cat 5E
SID-00024-02	OFFICE BLOCK 2 Port RJ45 RJSE PowerCat, shuttered without magnet White 568A/B UTP Cat 5E
ASB-00001-02	Shutters White (100Pk)

Molex's standard colour is white. Other colours may be subject to minimum order quantities.

### MOLEX PREMISE NETWORKS

**Molex Premise Networks**  
**Corporate Headquarters**  
 Tel: 1 866 733 6659  
[www.molexpn.com](http://www.molexpn.com)

**European**  
**Headquarters**  
 Tel: 44 (0) 1489 572111  
[www.molexpn.co.uk](http://www.molexpn.co.uk)

**Pac Rim**  
**Headquarters**  
 Tel: 61 3 9971 7111  
[www.molexpn.com.au](http://www.molexpn.com.au)

**Molex**  
**Incorporated**  
 Tel: 630 969 4550  
[www.molex.com](http://www.molex.com)