



**Keystone Jack
Category 6**

Features and Benefits

Utilizing patented IDC V-shaped contacts that flex not fatigue when terminated, the RJ-45 Keystone Jack is compatible with any product that accepts the standard keystone profile. This would include manufacturers such as: Wiremold®, Tyco®, Krone®, Leviton® and Hubbell®.

- Patented IDC V-shaped contacts that flex not fatigue when terminated
- Features pointed IDC towers to speed termination and enhance cable retention
- Dual color-coding allows for 568 A/B wiring configuration
- Can be terminated using industry standard punch-down tools
- RJ-11 compatibility
- Molded category identification on jack face

Commercial Standards:

TIA/EIA-568-B.2-1 Component Compliant
 FCC Subpart F 68.5 Compliant
 IEC-603-7 Compliant
 ISO 11801 Class E Compliant
 ETL Verified for Category 6 Component Compliance
 UL-1863
 CSA C22.2

Mechanical Characteristics

Jack Connector

Plastic Housing: Thermoplastic UL94V-0 rated or equivalent
 Operating Life: Minimum 750 insertion cycles
 Contact Material: Copper Alloy
 Contact Plating: 50µ" Gold/100µ" Nickel
 Contact Force: 100g minimum
 Plug Retention Force: 11 lbf minimum

IDC Connector


Plastic Housing: Thermoplastic UL94V-0 rated or equivalent
 Operating Life: Minimum 20 reterminations
 Contact Material: Copper Alloy
 IDC Contact Plating: Tin/Lead Plate
 Wire Accommodation: 22-24 AWG solid

Electrical Characteristics

Interface Resistance: 20 milliohms
 Initial Contact Resistance: 2.5 milliohms
 Insulation Resistance: >100 Megaohms

Parts List:

- Keystone Jack with Stuffer Cap



Keystone Jack

Dimensions:
 23mm x 18mm x 30.6mm
 (.9"H x .7"W x 1.2"D)
 Shipping Weight: 28g (1 oz.)

ORDERING INFORMATION

Order No.	Description
KSJ-00033-**	Keystone Jack Category 6 8W 568A/B

Insert color code in place of ** in part number when ordering DataGate Plus jack or Accessories:
 01 = Almond, 02 = White, 04 = Black, 05 = Ivory, 08 = Light Grey, RD = Red, BL = Blue, GR = Green, YL = Yellow,
 RG = Orange, PP = Purple






Molex® is a registered trademark of Molex Incorporated; Wiremold® is a registered trademark of The Wiremold Company;
 Tyco® is a registered trademark of Tyco International, Ltd.; Krone® is a registered trademark of Krone Incorporated;
 Leviton® is a registered trademark of Leviton Manufacturing Company; Hubbell® is a registered trademark of Hubbell Incorporated

MOLEX PREMISE NETWORKS

Molex Premise Networks
 Corporate Headquarters
 New Hampshire, USA
 Tel: 1 603 324 0200
 www.molexpn.com

European Headquarters
 Hampshire, England
 Tel: 44 (0) 1489 527111
 www.molexpn.co.uk

Pac Rim Headquarters
 Victoria, Australia
 Tel: 61 3 9971 7111
 www.molexpn.com.au

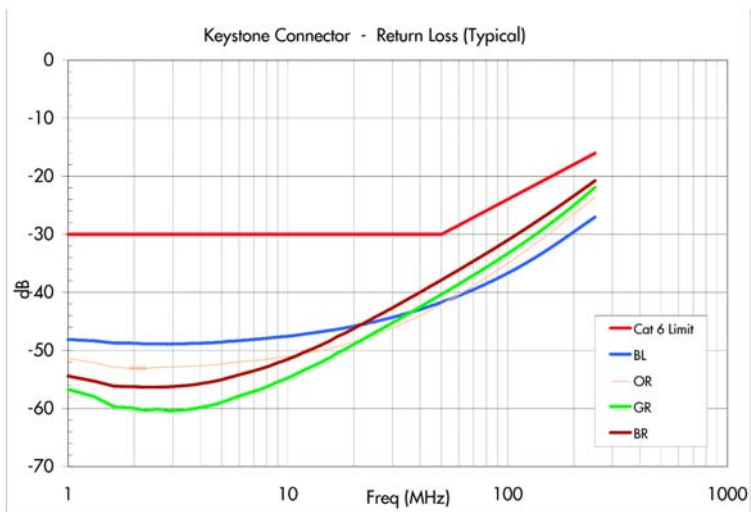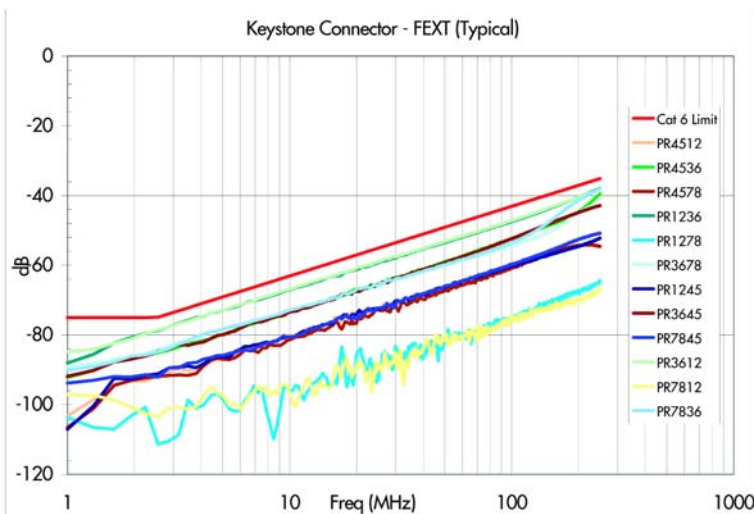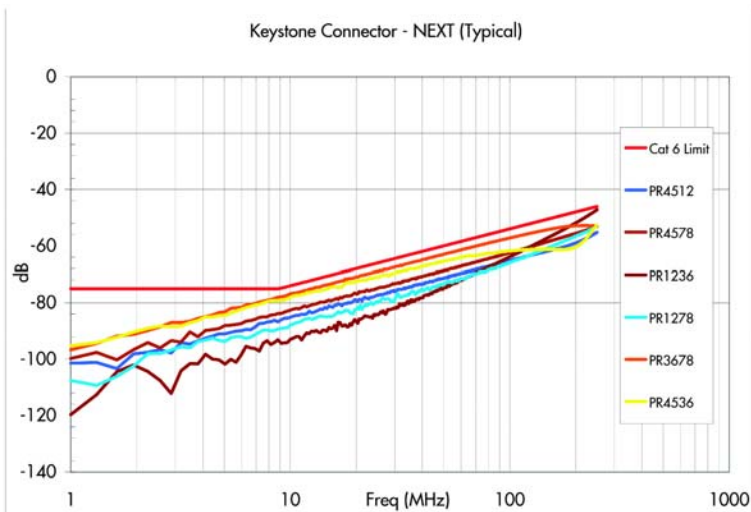

MOLEX PREMISE NETWORKS

Molex Premise Networks
Corporate Headquarters
New Hampshire, USA
Tel: 1 603 324 0200
www.molexpn.com

European Headquarters
Hampshire, England
Tel: 44 (0) 1489 527111
www.molexpn.co.uk

Pac Rim Headquarters
Victoria, Australia
Tel: 61 3 9971 7111
www.molexpn.com.au



Frequency (MHz)	Keystone Worst Case (dB)							
	NEXT		FEXT		Return Loss		Insertion Loss	
	SPEC	MOLEX	SPEC	MOLEX	SPEC	MOLEX	SPEC	MOLEX
1	-75.0	-95.3	-75.0	-84.9	-30.0	-48.1	-0.10	-0.02
4	-75.0	-85.3	-71.1	-75.0	-30.0	-48.8	-0.10	-0.02
8	-75.0	-79.1	-65.0	-68.9	-30.0	-47.9	-0.10	-0.02
10	-56.1	-77.2	-63.1	-67.1	-30.0	-46.7	-0.10	-0.02
16	-69.9	-73.0	-59.0	-62.9	-30.0	-43.1	-0.10	-0.02
20	-68.0	-70.8	-57.1	-60.8	-30.0	-41.3	-0.10	-0.02
25	-66.0	-68.9	-55.1	-59.1	-30.0	-39.3	-0.10	-0.02
31.25	-64.1	-67.2	-53.2	-57.2	-30.0	-37.4	-0.11	-0.02
62.5	-58.1	-61.1	-47.2	-51.4	-28.0	-31.2	-0.16	-0.03
100	-54.0	-57.3	-43.1	-47.2	-24.0	-26.9	-0.20	-0.05
200	-48.0	-50.7	-37.1	-40.5	-18.0	-20.2	-0.28	-0.07
250	-46.0	-48.7	-35.1	-38.0	-16.0	-18.2	-0.32	-0.09

NOTE:

Performance values shown in dB.

For NEXT, FEXT and Return Loss: the higher the negative value the better the performance (e.g. -73.0 better than -69.9)

For Insertion Loss: the lower the negative value the better the performance (e.g. -0.02 better than -0.10)

MOLEX PREMISE NETWORKS