


# Product Environmental Profile

**ATVRU75N4 ATV Regenerative Unit  
7,5 kW 400V**



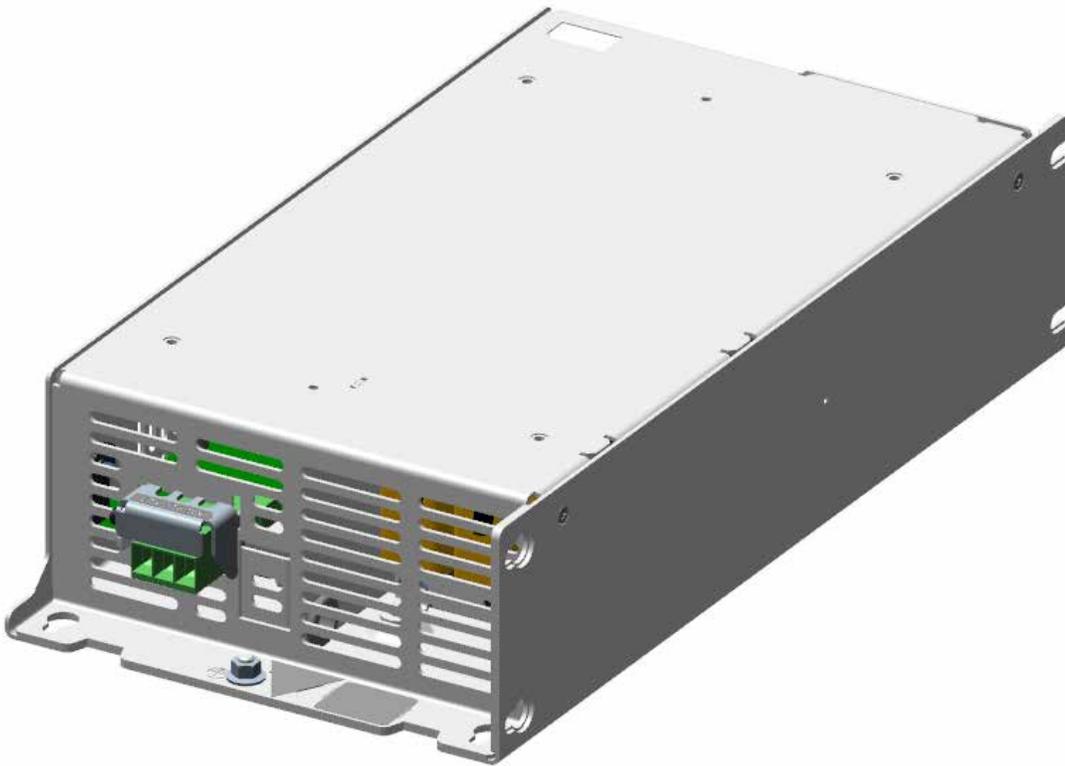


## General information

<b>Representative product</b>	ATV REGEN 7,5 kW 400V - ATVRU75N4
<b>Description of the product</b>	The main function of the ATV Regen product is to provide an option to regenerate energy back to the mains for customers. This option is to be associated to Altivar Drives products ranges 0 to 7,5 kW in a standard environment.
<b>Functional unit</b>	To provide energy to the customers mains, the Altivar Regen is associated with Drives and Electric Motors in the range of 0 to 7,5 kW during 10 years, a 40% in active phase and a 60% in stand-by phase.



## Constituent materials

**Reference product mass** 7702,1 including the product, its packaging and additional elements and accessories

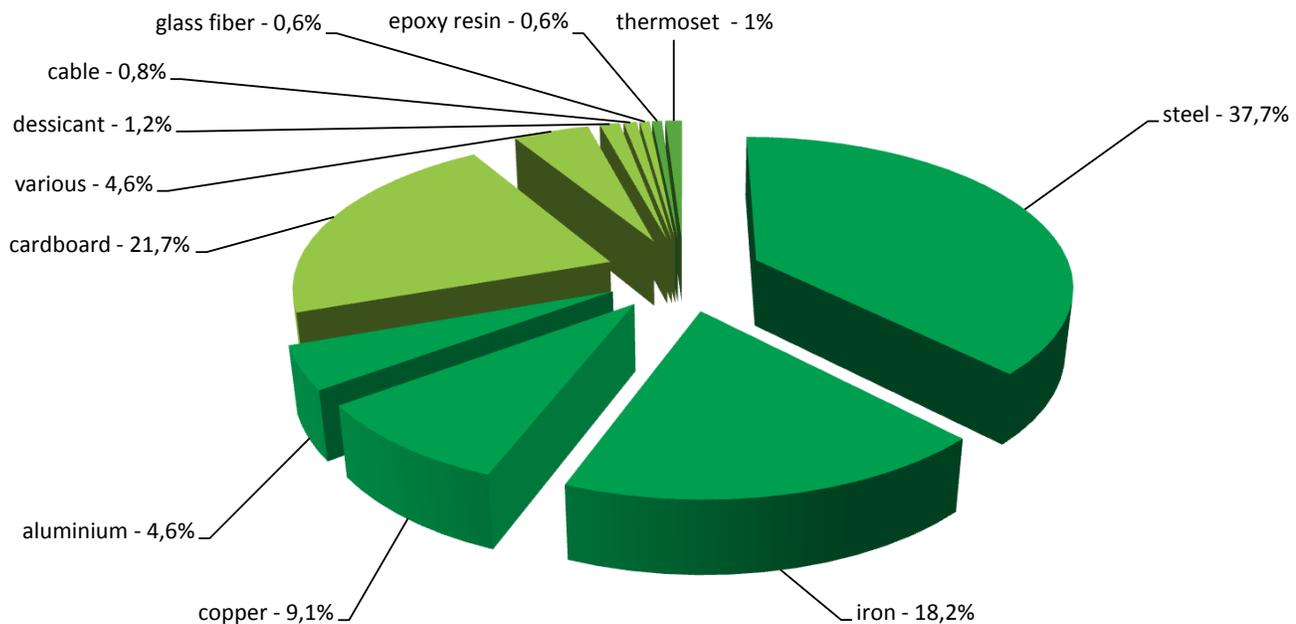

## Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 8 June 2011) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers - PBDE) as mentioned in the Directive

As the products of the range are designed in accordance with the RoHS Directive (European Directive 2002/95/EC of 27 January 2003), they can be incorporated without any restriction in an assembly or an installation subject to this Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website

<http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page>



## Additional environmental information

The ATV REGEN 7,5 kW 400V presents the following relevant environmental aspects	
Design	Regeneration of energy back to the mains of customers improve significantly the environmental behaviour of the applications during the Use phase.
Manufacturing	Manufactured at a Schneider Electric production site ISO14001 certified.
Distribution	Weight and volume of the packaging optimized, based on the European Union's packaging directive. Packaging weight is 1823,1 g, consisting of cardboard (94,3%), dessicant dryer (4,4%), PE film (1,1%) and paper (0,2%).  Product distribution optimised by setting up local distribution centres.
Installation	The product does not require any installation operations.
Use	The product does not require special maintenance operations.
End of life	End of life optimized to decrease the amount of waste and allow recovery of the product components and materials.  This product contains an electronic card (466,6 g), cables (78,7 g), steel (2777,9 g) and aluminium (307 g) that should be separated from the stream of waste so as to optimize end-of-life treatment.  The location of these components and other recommendations are given in the End of Life Instruction document which is available on the Schneider-Electric Green Premium website.  <a href="http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page">http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page</a>  Recyclability potential: <b>81%</b> Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).


## Environmental impacts

Reference life time	10 years			
Product category	Active products			
Installation elements	No special components needed			
Use scenario	Consumed power is 346 W 40 % of the time in Active mode, 12 W 60 % of the time in Standby mode, W 0 % of the time in Sleep mode and W 0 % of the time in Off mode.  The product is in active phase 40% of the time with a power use of 346 W and in stand-by phase 60% of the time with a power use of 12 W , for 10 years.			
Geographical representativeness	Worldwide			
Technological representativeness	The main function of the ATV Regen product is to provide an option to regenerate energy back to the mains for customers. This option is to be associated to Altivar Drives products ranges 0 to 7,5 kW in a standard environment.			
Energy model used	Manufacturing	Installation	Use	End of life
	Energy model used: Batam - Indonesia	Electricity Mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity Mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity Mix; AC; consumption mix, at consumer; < 1kV; EU-27

Compulsory indicators	ATV REGEN 7,5 kW 400V - ATVRU75N4						
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	8,04E-03	7,70E-03	0*	0*	3,43E-04	0*
Contribution to the soil and water acidification	kg SO <sub>2</sub> eq	5,72E+01	2,72E-01	5,99E-03	0*	5,69E+01	0*

Contribution to water eutrophication	kg PO <sub>4</sub> <sup>3-</sup> eq	2,18E+00	4,16E-02	1,38E-03	0*	2,13E+00	5,97E-04
Contribution to global warming	kg CO <sub>2</sub> eq	7,59E+03	5,98E+01	1,32E+00	0*	7,53E+03	1,29E+00
Contribution to ozone layer depletion	kg CFC11 eq	1,84E-03	6,22E-06	0*	0*	1,83E-03	0*
Contribution to photochemical oxidation	kg C <sub>2</sub> H <sub>4</sub> eq	2,71E+00	2,14E-02	4,31E-04	0*	2,69E+00	0*

Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m3	2,01E+01	4,85E-01	0*	0*	1,96E+01	0*
Total Primary Energy	MJ	1,54E+05	1,29E+03	1,86E+01	0*	1,53E+05	0*

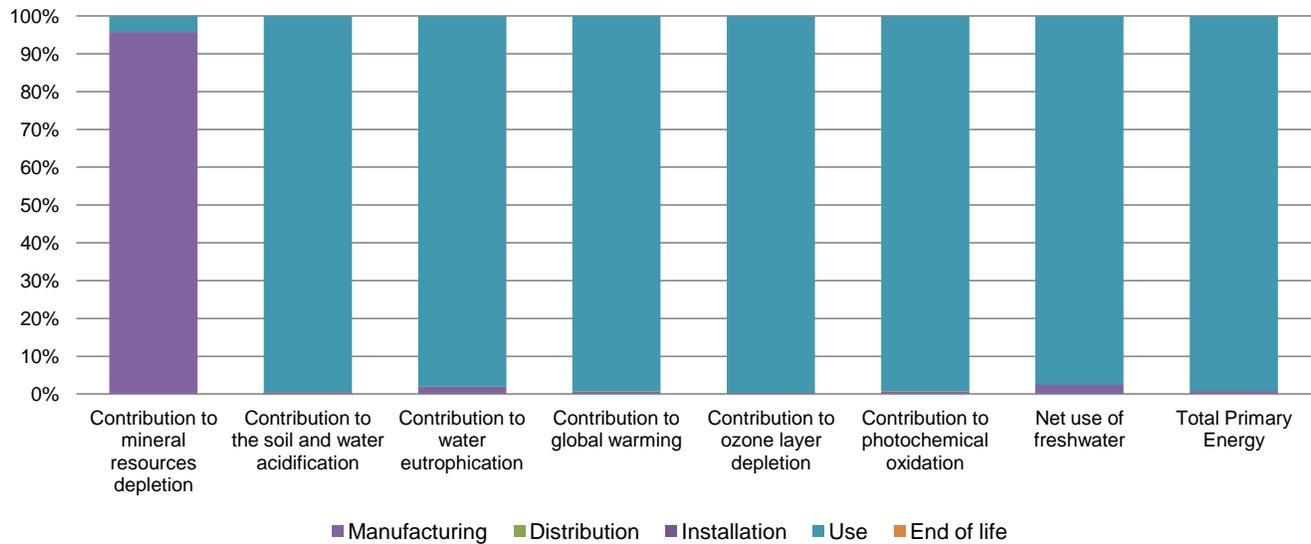

Optional indicators		ATV REGEN 7,5 kW 400V - ATVRU75N4					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	7,83E+04	7,23E+02	1,85E+01	0*	7,76E+04	8,82E+00
Contribution to air pollution	m <sup>3</sup>	3,34E+05	1,05E+04	5,85E+01	0*	3,23E+05	6,81E+01
Contribution to water pollution	m <sup>3</sup>	3,21E+05	4,61E+03	2,17E+02	0*	3,16E+05	1,73E+02
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	1,88E+00	1,88E+00	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	1,10E+04	4,45E+01	0*	0*	1,09E+04	0*
Total use of non-renewable primary energy resources	MJ	1,43E+05	1,25E+03	1,86E+01	0*	1,42E+05	0*
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	1,09E+04	8,99E+00	0*	0*	1,09E+04	0*
Use of renewable primary energy resources used as raw material	MJ	3,55E+01	3,55E+01	0*	0*	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	1,43E+05	1,24E+03	1,86E+01	0*	1,42E+05	0*
Use of non renewable primary energy resources used as raw material	MJ	1,06E+01	1,06E+01	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0,00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0,00E+00	0*	0*	0*	0*	0*
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Hazardous waste disposed	kg	1,04E+02	9,40E+01	0*	1,93E+00	0*	7,69E+00
Non hazardous waste disposed	kg	2,82E+04	4,19E+01	0*	0*	2,82E+04	0*
Radioactive waste disposed	kg	2,30E+01	1,26E-02	0*	0*	2,30E+01	0*

Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Materials for recycling	kg	7,51E+00	9,41E-01	0*	1,72E+00	0*	4,85E+00
Components for reuse	kg	0,00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	2,07E-01	4,72E-03	0*	0*	0*	2,02E-01
Exported Energy	MJ	0,00E+00	0*	0*	0*	0*	0*

\* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.5, database version 2015-04.

The use phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration N°	ENVPEP1604005_V1	Drafting rules	PCR-ed3-EN-2015 04 02
Date of issue	42468		
Validity period	5 years	Information and reference	<a href="http://www.pep-ecopassport.org">www.pep-ecopassport.org</a>
Independent verification of the declaration and data, in compliance with ISO 14025 : 2010			
Internal	X	External	
The elements of the present PEP cannot be compared with elements from another program.			
Document in compliance with ISO 14025 : 2010 « Environmental labels and declarations. Type III environmental declarations »			

Schneider Electric Industries SAS

Customer Care Center

[www.schneider-electric.com/contact](http://www.schneider-electric.com/contact)

35, rue Joseph Monier

CS 30323

F- 92506 Rueil Malmaison Cedex

RCS Nanterre 954 503 439

Capital social 896 313 776 €

[www.schneider-electric.com](http://www.schneider-electric.com)

Published by Schneider Electric

ENVPEP1604005\_V1

© 2016 - Schneider Electric – All rights reserved

08/04/2016