


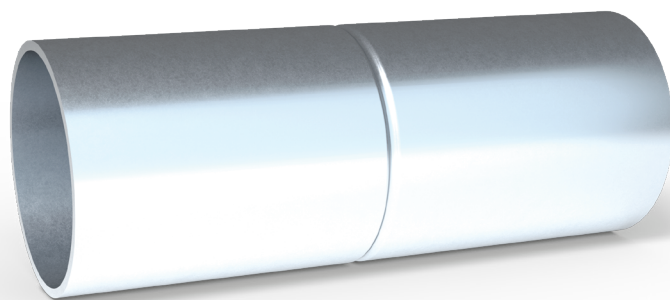

## Datablad / Skjøtemuffe Stål

| El-nr     | Betegnelse             | Innerdiam. | Ytterdiam. |
|-----------|------------------------|------------|------------|
| 12 269 42 | Skjøtemuffe Stål 16 mm | 18 mm      | 45 mm      |
| 12 269 43 | Skjøtemuffe Stål 20 mm | 22 mm      | 54 mm      |
| 12 269 44 | Skjøtemuffe Stål 25 mm | 27,4 mm    | 58 mm      |
| 12 269 45 | Skjøtemuffe Stål 32 mm | 34,4 mm    | 68 mm      |
| 12 269 46 | Skjøtemuffe Stål 40 mm | 42,4 mm    | 76 mm      |
| 12 269 47 | Skjøtemuffe Stål 50 mm | 52,4 mm    | 96 mm      |

| Egenskaber |                                                                                  |
|------------|----------------------------------------------------------------------------------|
| Material   | Mild steel rolled                                                                |
| Galvanized | Inside and outside hot dip galvanized acc. to EN ISO 1461 or black powder coated |
| Approval   | VDE/ÖVE EN 61386-1<br>VDE/ÖVE EN 61386-21                                        |