


The multifunction instrument PVCHECK performs prompt and safe electrical checks required for a PV system (DC section) and controls of the functionality of modules / strings in accordance with IEC/EN62446 guideline

### PVCHECK: safety checks

PVCHECK verifies the continuity of the protective conductors (and associated connections) and measures the insulation resistance of the active conductors on a module, a string, or a photovoltaic field in accordance to IEC/EN62446 guideline, without the need of any external switch to short-circuit the positive and negative terminals.


## PV field not connected to ground

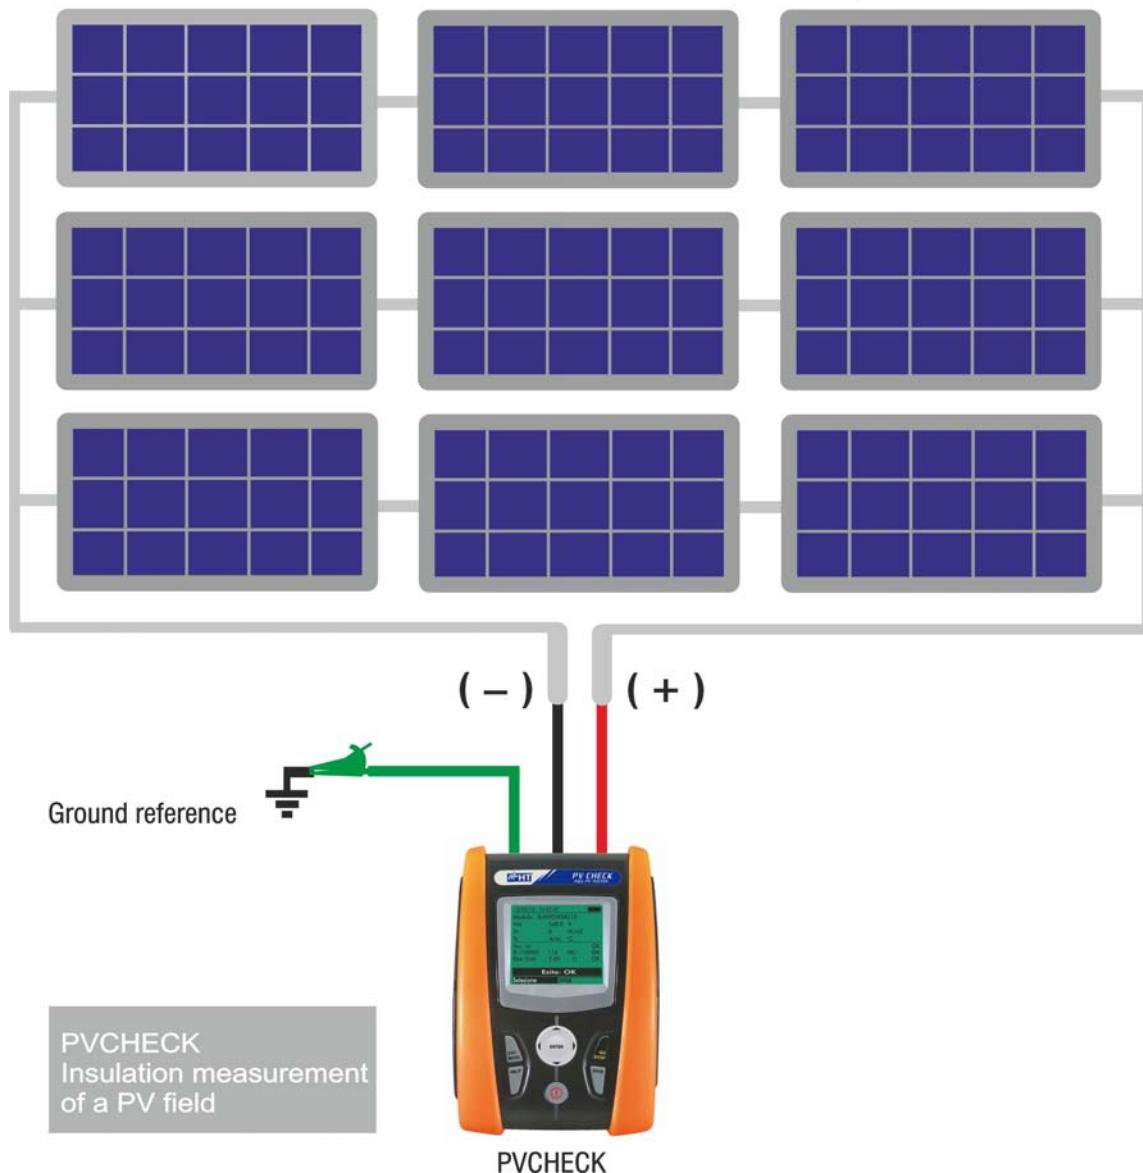

Direct measurement of insulation resistance of a PV Field not connected to ground

## PVCHECK: functionality checks

PVCHECK verifies the functionality of a PV string in accordance to the IEC/EN62446 guideline by measuring the open circuit voltage and the short-circuit current at operating conditions and extrapolating the results to the STC (by measuring the solar radiation). Finally, it displays the measurements and a comparison to the PV strings previously tested.

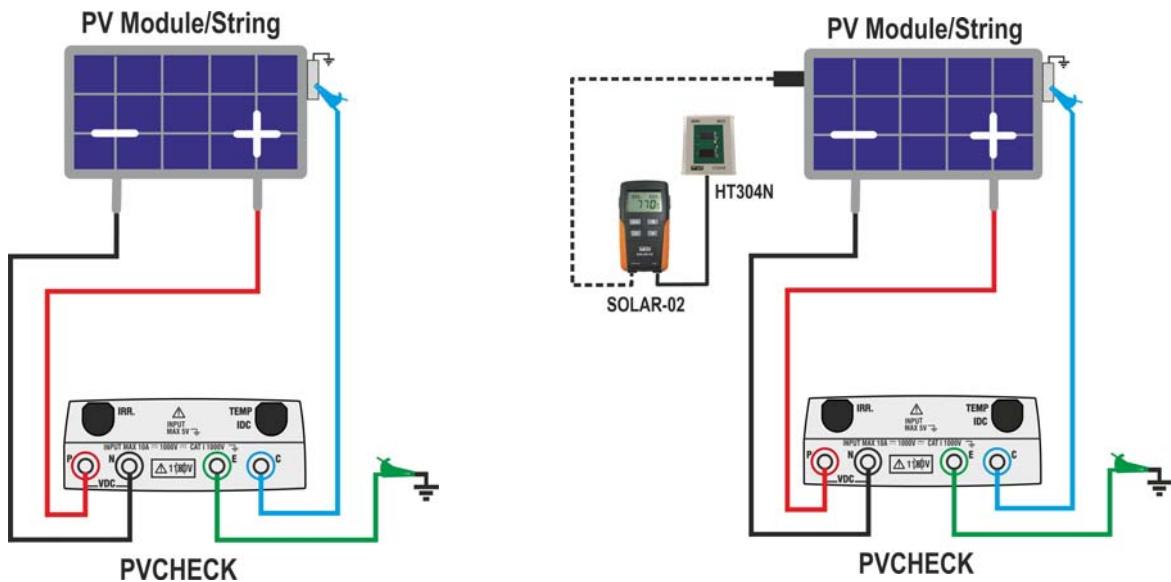


Test IVCK – Automatic measurement of Voc,  
Isc + Insulation + Continuity on a PV  
Module/String without irradiance  
measurement

Test IVCK – Automatic measurement of Voc, Isc  
+ Insulation + Continuity on a PV Module/String  
with irradiance measurement with optional  
accessories SOLAR-02 and HT304N

## PVCHECK: performance checks

PVCHECK analyses the performance of a PV array (DC) under the operating conditions (connected to the inverter) displaying the generated power and the efficiency of the PV plant in accordance to the IEC/EN62446

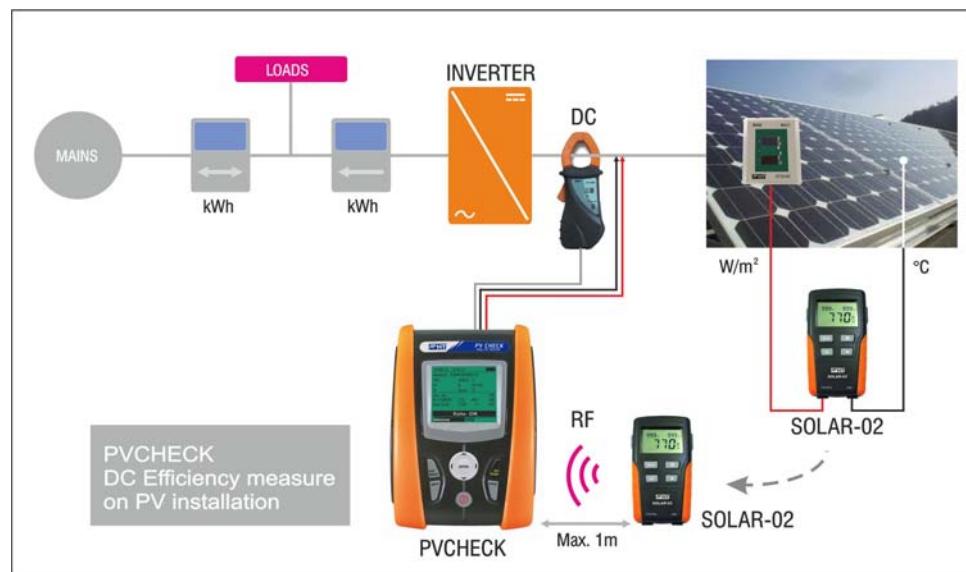



## 2. ELECTRICAL SPECIFICATIONS

Accuracy is calculated as  $\pm [\% \text{ readings} + (\text{no. of digits}) * \text{resolution}]$  at  $23^\circ\text{C} \pm 5^\circ\text{C}$ , relative humidity <80%HR

### 2.1. PERFORMANCE TEST

#### DC Voltage

Range (V)	Resolution (V)	Uncertainty
5.0 ÷ 199.9	0.1	
200.0 ÷ 999.9	0.5	$\pm (1.0\%\text{rdg} + 2\text{dgt})$

#### DC current (by mean external clamp)

Range (mV)	Resolution (mV)	Uncertainty
-1100 ÷ -5		
5 ÷ 1100	0.1	$\pm (0.5\%\text{rdg} + 0.6\text{mV})$

DC current is always positive ;DC current zeroed if the related voltage value is < 5mV

FS DC clamp [A]	Resolution [A]	Minimum read value [A]
1 < FS ≤ 10	0.001	0.05
10 < FS ≤ 100	0.01	0.5
100 < FS ≤ 1000	0.1	5

#### DC Power (Vmeas > 150V)

Clamp FS (A)	Range (W)	Resolution (W)	Uncertainty
1 < FS ≤ 10	0.000k ÷ 9.999k	0.001k	$\pm(1.5\%\text{rdg} + 3\text{dgt})$
10 < FS ≤ 100	0.00k ÷ 99.99k	0.01k	$(I_{\text{meas}} < 10\%\text{FS})$ $\pm(1.5\%\text{rdg})$
100 < FS ≤ 1000	0.0k ÷ 999.9k	0.1k	$(I_{\text{meas}} \geq 10\%\text{FS})$

#### Irradiance (by mean HT304N)

Range (mV)	Resolution (mV)	Uncertainty
1 ÷ 40.0	0.02	$\pm(1.0\%\text{rdg} + 0.1\text{mV})$

#### Temperature (by mean PT300N)

Range (°C)	Resolution (°C)	Uncertainty
-20.0 ÷ 100.0	0.1	$\pm (1.0\%\text{rdg} + 1^\circ\text{C})$



## 2.2. FUNCTIONALITY TEST

### DC Voltage @ OPC

Range (V)	Resolution (V)	Uncertainty
5.0 ÷ 199.9	0.1	$\pm(1.0\%rdg+2dgt)$
200 ÷ 999	1	

Minimum VPN voltage to start the test: 15V

### DC Current @ OPC

Range (A)	Resolution (A)	Uncertainty
0.10 ÷ 10.00	0.01	$\pm(1.0\%rdg+2dgt)$

### DC Voltage @ STC

Range (V)	Resolution (V)	Uncertainty
5.0 ÷ 199.9	0.1	$\pm(4.0\%rdg+2dgt)$
200 ÷ 999	1	

### DC Current @ STC

Range (A)	Resolution (A)	Uncertainty
0.10 ÷ 10.00	0.01	$\pm(4.0\%rdg+2dgt)$

### Irradiance (by mean HT304N)

Range (mV)	Resolution (mV)	Uncertainty
1 ÷ 40.0	0.02	$\pm(1.0\%rdg + 0.1mV)$

### Temperature (by mean PT300N)

Range (°C)	Resolution (°C)	Uncertainty
-20.0 ÷ 100.0	0.1	$\pm(1.0\%rdg + 1°C)$



## 2.3. SAFETY TEST

### Continuity Test (LOWΩ)

Range [Ω]	Resolution [Ω]	Uncertainty
0.00 ÷ 1.99	0.01	$\pm(2.0\% \text{rdg} + 2\text{dgt})$
2.0 ÷ 19.9	0.1	
20 ÷ 199	1	

Test current >200mA DC up to 2Ω (test leads included), Resolution 1mA, Uncertainty  $\pm(5.0\% \text{rdg} + 5\text{dgt})$

Open loop voltage  $4 < V_0 < 10V$

### Insulation Test (MΩ) – Mode TIMER

Test voltage [V]	Range [MΩ]	Resolution [MΩ]	Uncertainty
250, 500, 1000	0.01 ÷ 1.99	0.01	$\pm(5.0\% \text{rdg} + 5\text{dgt})$
	2.0 ÷ 19.9	0.1	
	20 ÷ 199	1	

Open voltage:  $< 1.25 * \text{nominal test voltage}$

Short circuit current:  $< 15\text{mA} (\text{peak})$  for all test voltages

Generated voltage Resolution 1V, uncertainty  $\pm(5.0\% \text{rdg} + 5\text{dgt})$  @  $R_{\text{mis}} > 0.5\% \text{ FS}$

Test current  $> 1\text{mA}$  with load =  $1\text{k}\Omega \times V_{\text{nom}}$

### Insulation Test (MΩ) – Mode FIELD (\*), STRING (\*\*)

Test voltage [V]	Range [MΩ]	Resolution [MΩ]	Uncertainty (***)
250	0.1 ÷ 1.9	0.1	$\pm(20.0\% \text{rdg} + 5\text{dgt})$
	2 ÷ 99	1	
500	0.1 ÷ 1.9	0.1	$\pm(20.0\% \text{rdg} + 5\text{dgt})$
	2 ÷ 99	1	
1000	0.1 ÷ 1.9	0.1	$\pm(20.0\% \text{rdg} + 5\text{dgt})$
	2 ÷ 99	1	

(\*) For FIELD mode if  $V_{\text{PN}} > 1\text{V}$  the minimum voltage  $V_{\text{EP}}$  and  $V_{\text{EN}}$  for the calculation of  $R_{i(+)}$  and  $R_{i(-)}$  is 1V

(\*\*) For STRING mode minimum  $V_{\text{PN}}$  voltage to start the test: 15V

Open voltage  $< 1.25 \times \text{nominal test voltage}$

Short circuit current  $< 15\text{mA} (\text{peak})$  for each test voltage

Generated voltage resolution 1V, accuracy  $\pm(5.0\% \text{reading} + 5\text{digits})$  @  $R_{\text{mis}} > 0.5\% \text{ FS}$

Rated current measured  $> 1\text{mA}$  with  $1\text{k}\Omega @ V_{\text{nom}}$

$$\text{add 5 dcts to the accuracy if } \frac{\max\{R^+, R^-\}}{\min\{R^+, R^-\}} \geq 100$$

(\*\*\*) For FIELD mode:

$$\text{add 5 dcts to the accuracy if } \frac{\max\{R^+, R^-\}}{\min\{R^+, R^-\}} \geq 100$$



### 3. GENERAL SPECIFICATIONS

**DISPLAY AND MEMORY:**

Features: 128x128pxl custom LCD with backlight  
Memory: max 999 test

**POWER SUPPLY:**

PVCHECK internal power supply: 6x1.5V alkaline batteries type LR6, AA, AM3, MN 1500  
Battery life: approx.120 hours (DC efficiency test)  
SOLAR-02 power supply: 4x1.5V alkaline batteries type AAA LR03  
SOLAR-02 max recording time (@ IP=5s): approx. 1.5h

**OUTPUT INTERFACE**

PC communication port: optical/USB  
Interface with SOLAR-02: wireless RF communication (max distance 1m)

**MECHANICAL FEATURES**

Size (L x W x H): 235 x 165 x 75mm  
Weight (batteries included): 1.2kg

**ENVIRONMENTAL CONDITIONS:**

Reference temperature: 23°C ± 5°C  
Working temperature: 0° ÷ 40°C  
Working humidity: <80%HR  
Storage temperature (remove the batteries): -10 ÷ 60°C  
Storage humidity: <80%HR

**GENERAL REFERENCE STANDARDS:**

Safety: IEC/EN61010-1  
Safety of measurement accessories: IEC/EN61010-031  
Measurements: IEC/EN62446 (PV performance, IVCK)  
IEC/EN 61557-1, 2, -4 (LOWΩ, MΩ))  
Insulation: double insulation  
Pollution degree: 2  
Overvoltage category: CAT III 300V to ground  
Max 1000V DC among inputs P, N, E, C  
Max height of use: 2000m

This instrument complies with the requirements of the European Low Voltage Directives 2006/95/EEC (LVD) and EMC 2004/108/EEC