

19426000	<b>DATA SHEET</b>	
Valid from: 17.09.2018	<b>EPIC® H-A 3 Tgv M20</b>	

## Description

- Innovative metal and plastic housing design
- Housing in plastic or metal version. For power supply in the smallest possible space



## General characteristics

Series	H-A 3
Version	Hood M20
Locking mechanism	bolts for single lever
Cable entry	straight
Protection (DIN EN 60529)	IP 65 (latched)
Protection (NEMA 250, UL50E)	4, 12 (latched)
Temperature range	-40°C to +100°C, short-term up to +125°C

## Materials and surfaces

Housing	PA, grey
---------	----------

## Approvals

VDE-Approval, VDE-REG.-Nr.	B437
----------------------------	------


## Standards

Safety Standard	IEC 61984; UL 1977
-----------------	--------------------

Creator: MANA2/PDP Released: IVSE1/PDP	Document: DB19426000EN Version: 01	Page 1 of 2
---	---------------------------------------	-------------

19426000	<b>DATA SHEET</b>	
Valid from: 17.09.2018	EPIC® H-A 3 Tgv M20	

## Drawings

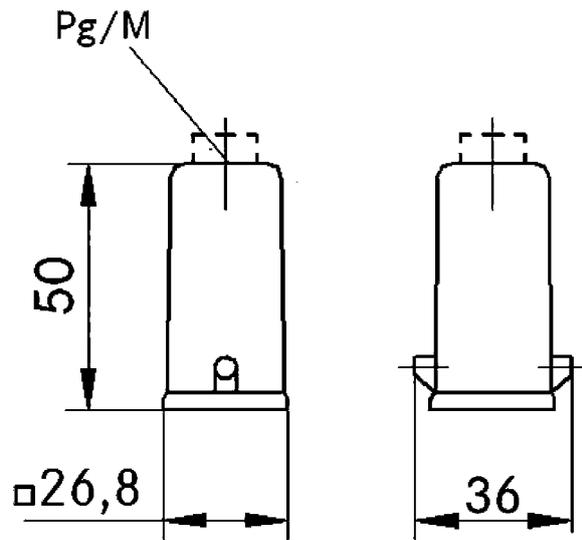

Industrial machinery and plant engineering



Mechanical resistance



Robust



Waterproof

### Info

Compact, robust housings size H-A 3

### Application range

Machine and equipment manufacturing  
Control engineering  
Electronic laboratory

### Remark

Photographs are not to scale and do not represent detailed images of the respective products.

Creator: MANA2/PDP Released: IVSE1/PDP	Document: DB19426000EN Version: 01	Page 2 of 2
---	---------------------------------------	-------------