


## EPIC® ULTRA H-B 10 AG QB

The robust and reliable industry connector housing as EMC version

EPIC® Rectangular connector housing EMC protection, corrosion resistant, UL50E, Nema250

### Info

EMC protection  
Corrosion-resistant  
Made in Germany

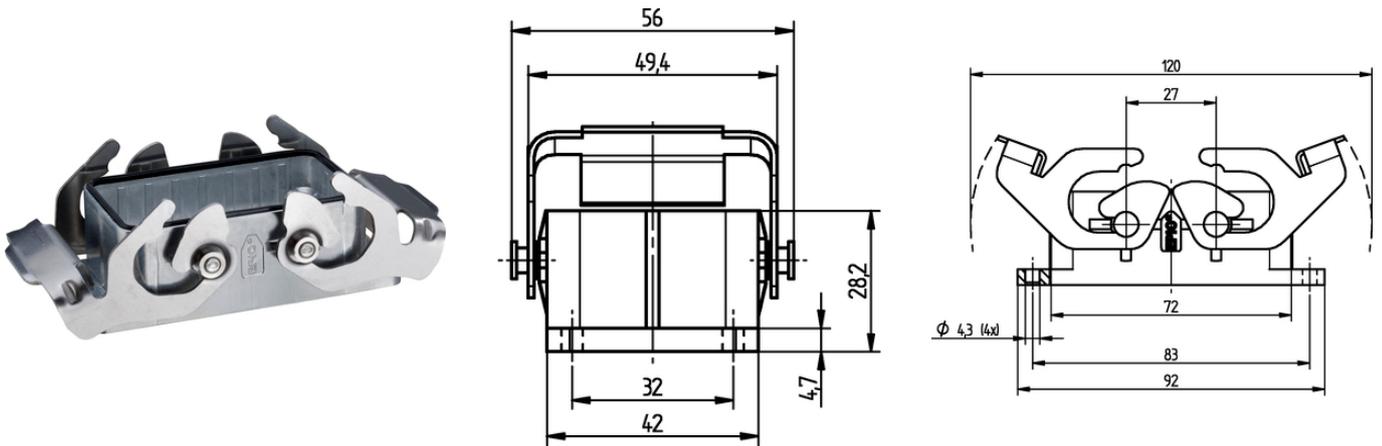

-  Good chemical resistance
-  Wide clamping range
-  Assembly time
-  Optimum strain relief
-  Space requirement
-  Robust
-  Integrated SKINTOP<sup>®</sup> cable gland
-  Connector with standard housing unit

Last Update (11.10.2021)

©2021 Lapp Group - Technical changes reserved

Product Management [www.lappkabel.de](http://www.lappkabel.de)

You can find the current technical data in the corresponding data sheet.

PN 0456 / 02\_03.16

## EPIC® ULTRA H-B 10 AG QB



Interference signals



Waterproof

### Benefits

Optimum, low-resistance 360° screening  
 All-purpose due to high corrosion resistance and high environmental protection.  
 Space-saving due to compact dimensions  
 Faster than any other comparable system  
 High mechanical resistance

### Application range

In EMC-sensitive environments  
 For fixed and flexible applications (e.g. machinery building, wind turbines)  
 Construction machinery  
 Electric motor manufacturing

### Product features

Resistance to cyclic salt spray is tested according to IEC 68-2-52, severity level 2  
 Housings with the BRUSH addition come with BRUSH cable screen contacting  
 Pluggable with standard housings  
 Corrosion-resistant according to DIN EN 6988  
 Salt spray testing according to DIN EN ISO 9227, method NSS, period of test 480 hours

### Technical Data

Classification ETIM 5:	ETIM 5.0 Class-ID: EC000437 ETIM 5.0 Class-Description: Housing for industrial connectors
Classification ETIM 6:	ETIM 6.0 Class-ID: EC000437 ETIM 6.0 Class-Description: Housing for industrial connectors
Material:	Housing: nickel-plated zinc die-casting Lever and bolts: stainless steel Sealing: NBR Cable gland Body: nickel-plated brass Insert: PA Seal: special elastomer
Protection rating:	IP 68 NEMA 250, UL50E: 12, 4, 4X (latched)
Temperature range:	-40°C to +100°C

### Note

Photographs and graphics are not to scale and do not represent detailed images of the respective products.  
 Prices are net prices without VAT and surcharges. Sale to business customers only.

**EPIC® ULTRA H-B 10 AG QB**

Article number	Article description	Pieces / PU
H-B housing: panel-mount base (double lever)		
70250213	ULTRA H-B 10 AG QB	1

Last Update (11.10.2021)

©2021 Lapp Group - Technical changes reserved

Product Management [www.lappkabel.de](http://www.lappkabel.de)

You can find the current technical data in the corresponding data sheet.  
PN 0456 / 02\_03.16