




LCD-LCD

Fiberadapter MM og SM

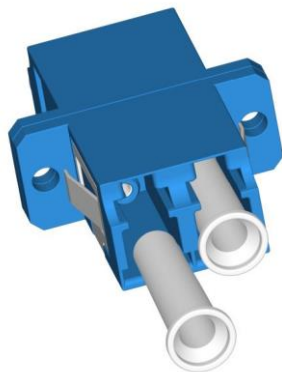

Materiale:

Hus: Plast PBT 20% FRP
Låsefjær: Stainless steel
Støvhette: Plast PP
Sleeve: Zirconia eller metall

Min max temperatur:

Driftstemperatur: [°C] -25 +70
Lagringstemperatur: [°C] -40 +85

Typical Insertion Loss [dB]

Adapter Type	SM at 1310 nm		MM at 850 nm
	Low Loss Zirconia Sleeve	Standard Zirconia Sleeve	Standard Metal Sleeve
LC Dx PC	0.10	0.15	0.10

- Strekkfasthet sveising (Plastik Adapter) > 100 N
- Innsetting tap variasjon under trekke kraft test < 0,20 dB
- Innsetting tap variasjon etter 500 tilkoblinger < 0,10 dB

Molex art.nr	El.nr	Beskrivelse
1061270310	6909607	Adapter LCD-LCD MM, PhBr, SC f.print, flange 13,3x9,9 Beige
AD83ZP1N	6909608	Adapter LCD-LCD SM Zirconia sleeve plast hus Blå

LC Duplex Adapter SC Footprint - Flanged

