

Connector - for direct current, with Multi-Grip

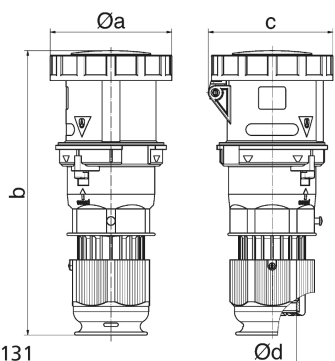


Product description	
BALS-Prd.-Nr	31197
EAN	4024941311977
Product category	Connector TE
Current	125A
Number of poles	4p
Arrangement of phases	3P+PE
Position of earth contact	11 h
Voltage	440 - 460V~
Frequency	60Hz

Product description	
Protection degree	IP67
Colour code	red RAL 3000
Colour of appliance	Hinged lid red RAL 3000, Bayonet ring grey RAL 7035, Housing cover grey RAL 7035, Cable gland grey RAL 7035, Collar grey RAL 7035
Connection design	screw terminal as box terminal with Kontex-contact
Maximum conductor size	50.0 qmm
Cable entry	Cable gland
Height	295mm
Width	125mm
Depth	128mm
Material of enclosure	Polycarbonate + Polyester
Contacts	The contact carrier is made of high temperature resistant material, the contacts are brass nickel plated

Logistics data	
Weight/pcs	1.2 kg / Piece
Packaging	Bag
Content amount	1 ST
EAN	4024941311977
Length	128 mm
Width	125 mm
Height	295 mm

Logistics data	
Weight	1.201 kg
Volume	1,612.773 ccm
Packaging	Carton
Content amount	5 ST
EAN	4024941226660
Length	345 mm
Width	345 mm
Height	217 mm
Weight	6.335 kg
Volume	24,276 ccm

	Ampere	125	125	125					
	Polzahl	3	4	5					
	a ø	125,0	125,0	125,0					
	b	295,0	295,0	295,0					
	c	128,0	128,0	128,0					
	d ø	50,0	50,0	50,0					
	Leiter mm ² min	16	16	16					
	Leiter mm ² max	50	50	50					

