

## Panel mounting appliance inlet - without closure cap




| Product description       |                                  |
|---------------------------|----------------------------------|
| BALS-Prd.-Nr              | 2666                             |
| EAN                       | 4024941026666                    |
| Product category          | Surface mounting appliance inlet |
| Current                   | 32A                              |
| Number of poles           | 4p                               |
| Arrangement of phases     | 3P+PE                            |
| Position of earth contact | 6 h                              |
| Voltage                   | 380 - 415V~                      |
| Frequency                 | 50/60Hz                          |

| Product description            |                                                                                |
|--------------------------------|--------------------------------------------------------------------------------|
| Protection degree              | IP67                                                                           |
| Colour code                    | red RAL 3000                                                                   |
| Colour of appliance            | Collar red RAL 3000, Bayonet ring grey RAL 7035, Enclosure grey RAL 7035       |
| Connection design              | with screw terminal                                                            |
| Maximum conductor size         | 6,0 qmm                                                                        |
| Cable entry                    | other                                                                          |
| Height                         | 137mm                                                                          |
| Width                          | 94mm                                                                           |
| Depth                          | 98mm                                                                           |
| Flange size vertical in mm     | 75mm                                                                           |
| Flange size horizontal in mm   | 90mm                                                                           |
| Drill hole dist. vertical mm   | 45mm                                                                           |
| Drill hole dist. horizontal mm | 78mm                                                                           |
| Material of enclosure          | Polyamide                                                                      |
| Contacts                       | The contact carrier is made of polyamide, the contacts are brass nickel plated |

| Logistics data |                  |
|----------------|------------------|
| Weight/pcs     | 0.267 kg / Piece |
| Packaging      | Bag              |
| Content amount | 1 ST             |
| EAN            | 4024941026666    |

| Logistics data |               |
|----------------|---------------|
| Length         | 98 mm         |
| Width          | 94 mm         |
| Height         | 137 mm        |
| Weight         | 0.268 kg      |
| Volume         | 1,262.044 ccm |
| Packaging      | Carton        |
| Content amount | 10 ST         |
| EAN            | 4024941833417 |
| Length         | 325 mm        |
| Width          | 217 mm        |
| Height         | 210 mm        |
| Weight         | 2.876 kg      |
| Volume         | 13,588.4 ccm  |

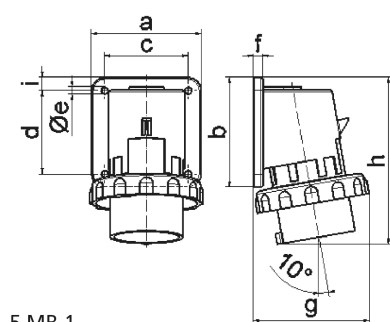

5 MB 1

| Ampere         | 16    | 16    | 16    | 32    | 32    | 32    |
|----------------|-------|-------|-------|-------|-------|-------|
| Polzahl        | 3     | 4     | 5     | 3     | 4     | 5     |
| a              | 74,0  | 75,0  | 84,0  | 90,0  | 90,0  | 90,0  |
| b              | 84,0  | 100,0 | 84,0  | 75,0  | 75,0  | 75,0  |
| c              | 58,0  | 62,0  | 64,0  | 78,0  | 78,0  | 78,0  |
| d              | 64,0  | 74,0  | 64,0  | 45,0  | 45,0  | 45,0  |
| e ø            | 5,5   | 4,3   | 5,5   | 5,5   | 5,5   | 5,5   |
| f              | 12,0  | 12,0  | 7,0   | 7,0   | 7,0   | 7,0   |
| g              | 80,0  | 88,0  | 90,0  | 100,0 | 100,0 | 101,0 |
| h              | 128,0 | 145,0 | 129,0 | 138,0 | 138,0 | 139,0 |
| i              | -     | -     | 10,0  | 13,0  | 13,0  | 13,0  |
| Leiter mm² min | 1     | 1     | 1     | 2,5   | 2,5   | 2,5   |
| Leiter mm² max | 2,5   | 2,5   | 2,5   | 6     | 6     | 6     |