

SOLA LEDLYSKASTER




200W SOLA



50W SOLA

120W SOLA

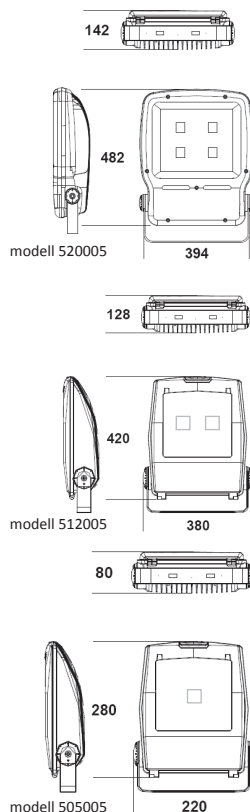

Løser automat ut under oppstart? - Prøv startstrømfilter fra IPAS - se side 44



Art nr	El.nr.	Tekst	Vekt	Farge	Pris eks mva
505005	31 030 06	Sola 50W COB Bridgelux 4000K 5000lm IP65	3,4 kg	Sølvgrå	kr 2780,00
512005	31 030 09	Sola 120W COB Bridgelux 4000K 10850lm IP65	11,2 kg	Sølvgrå	kr 5600,00
520005	31 000 89	Sola 200W COB Bridgelux 4000K 20000lm IP65	14,0 kg	Sølvgrå	kr 9400,00

Spesifikasjoner	SOLA 50W	SOLA 120W	SOLA 200W
Størrelse:	280 x 220 x 65 mm	420 x 380 x 125 mm	425 x 490 x 568 mm
Effekt:	46W	120W	200W
Systemeffekt:	50W	130W	215W
Lysytelse:	5 000 lumen	10 850 lumen	20 000 lumen
Tetningsgrad:	IP65	IP65	IP65
Effektfaktor:	>0,95	>0,95	>0,95
Ledning:	1,5 m	1,5 m	1,5 m
Spredningsvinkel:	90 grader	120 grader	120 grader
Levetid:	50 000 timer (L70/B50)	50 000 timer (L70/B50)	50 000 timer (L70/B50)
LED:	Bridgelux COB	Bridgelux COB	Bridgelux COB
LED Driver:	Mean Well	Mean Well	Mean Well

Lysfordeling 50W:

Lysnivå Diameter

2 m	555 lx	Ø 3,6 m
4 m	162 lx	Ø 7,2 m
6 m	64 lx	Ø 10,8 m

Lysfordeling 120W:

Lysnivå Diameter

6 m	134 lx	Ø 10,8 m
8 m	75 lx	Ø 14,3 m
10 m	48 lx	Ø 17,8 m


Lysfordeling 200W:

Lysnivå Diameter

6 m	183 lx	Ø 16,9 m
8 m	103 lx	Ø 22,5 m
12 m	46 lx	Ø 33,8 m



Hullavstand på festebrakett

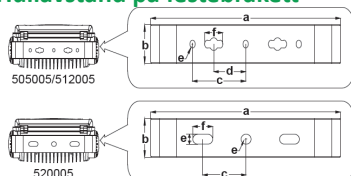

Art. nr	a	b	c	d	e	f
505005	225	30	n/a	50	11	33
512005	360	50	100	60	11	34
520005	394	41	105	n/a	12	25

