

FDV



LED Strips ECO Kit

El nr	32 416 20
Article nr	737011
EAN	7090015372370



Lysteknikk

Type lyskilde	SMD LED
Spenning	230VAC 50/60Hz
Watt	9,6W pr meter
Systemeffekt (W)	9,97 - 10,56W pr meter
Antall LED pr meter	120 LEDs pr meter
Kuttlengthe (mm)	66,6 mm
Effektiv lysstrøm (lm)	1263 lm
Effekt	120lm/W
Fargetemperatur	3000K
Fargegjengivelse (CRI)	Ra90
MacAdams faktor	SDCM<3
Levetid (IEC62717 Ta 25)	62 000h L80B50
Lysspredning	120°

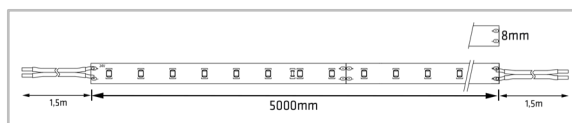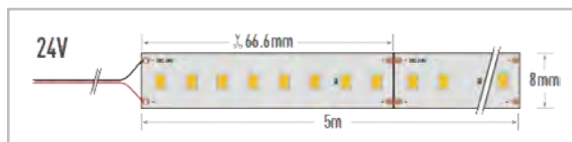

Dimmetype

Type	Dimbar faseavsnitt
------	--------------------

Beskyttelse

Isolasjonsklasse	Klasse III (Strips) Klasse II (Driver)
IP-grad (armaturhus)	IP20
IP-grad (driver)	IP20

Materialer og overflater

Armaturhus	Brass (PCB)
Farge	Hvit

Energi og godkjenning

Energiklasse	A-A+
Godkjenning	CE, RoHS
Safety standard	EN 60598-1:2015 & EN 60598-2-21:2015, EN 62031:2008+A1:2013+A2:2015, EN 62471:2008, EN 62493:2015

Montering/Tilkobling

Montering	Utenpåliggende
Kabling	1,5m ledning begge ender


Dimensjoner (mm)

Lengde (L)	5000 mm
Høyde (H)	3 mm
Bredde (W)	8 mm
Vekt	0,42 kgs

Forpakning

Eske dimensjon	240x215x60 mm
Eske Vekt	0,55 kgs
Kartong Dimensjon	610x350x490 mm
Antall/Kartong	20 stk
Kartong Vekt	10,75 kgs

LED Strips Eco Kit – IP20

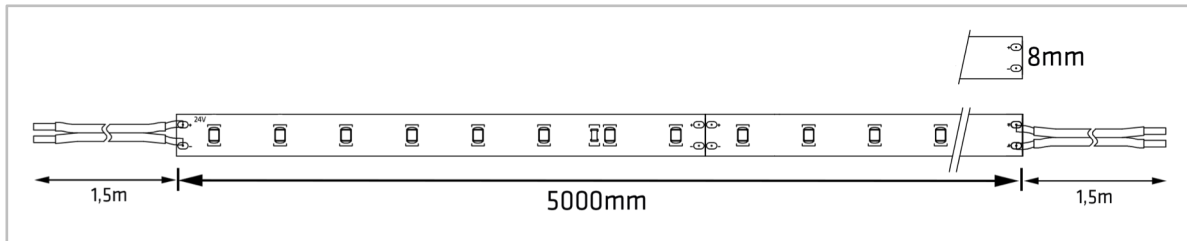

IMPORTANT INFORMATION:


1. Please read this instruction carefully before installation and keep it for future reference.
2. Please conform to the instruction of equipment and installed by professional.
3. Make sure correct voltage applied before use and keep away from heat and vibration source.
4. The light source of this luminaire is not replaceable. When the light source reaches its end of life the whole luminaire shall be replaced.
5. The product is not suitable for any oil pollution ambient or related applications.
6. For indoor use only.

MAIN PARAMETER:

Product	737011
Rated Voltage	AC 220-240V 50/60Hz
LED watt	9,6W/meter
System eff	9,97-10,56W/meter
Number of LED per meter	120 LEDs/meter
LED	SMD LED
LED Driver	Constant Voltage 24VDC 50W
Color Temperature	3000K
Protection	Class III (LED Strips), Class II (LED Driver)
Beam Angle	120°
IP Rated	IP20
Operation Temperature	-25°C <ta<45°C
Product Size	8x3x5000mm


INSTALLATION INSTRUCTIONS:

1. Always switch off the power supply before installation.
2. Make sure all parts are ready when open the box and prepare the installation tools the lighting needs.
3. Should be installed by qualified electricians.
4. If there is any damage on the housing or glass cover, should view it as disqualified product that cannot be used.
5. If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.

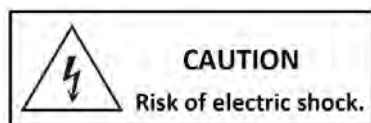


INSTALLATION STEPS:


1. Select the required position for luminaire and make sure the surface is clean. Tear off 3M double-sided adhesive to install.

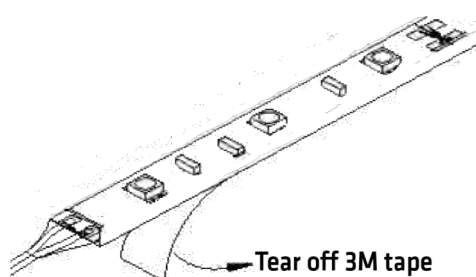

2. In case of enquiry, cut the strips along with the cutting line.

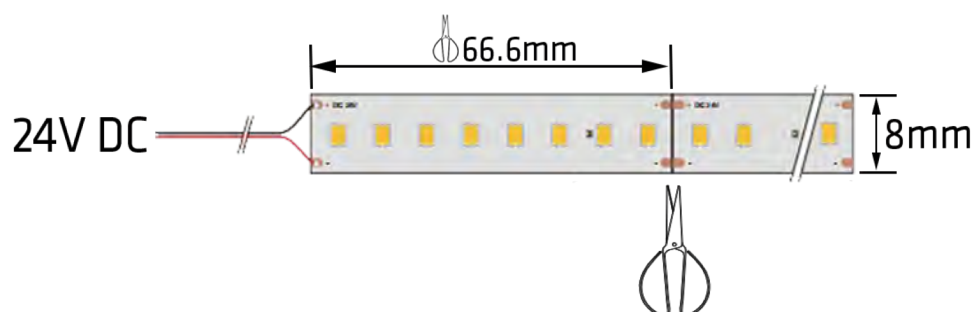

3. Connection diagram -



NOTE: LED Strips Eco Kit is with 1,5 meter cable on both ends.