

FDV


Frisbee Maxi 26W

El nr	32 005 30
Article nr	233004
EAN	7090015373858



Lysteknikk

Type lyskilde	LED (San'An SMD LED)
Spennning	230VAC 50/60Hz
Watt	24W
Systemeffekt (W)	26W
Effektiv lysstrøm (lm)	2200lm
Effekt	85lm/W
Fargetemperatur	3000K
Fargegjengivelse (CRI)	Ra>80
MacAdams faktor	SDCM<3
Levetid	60000 L80
Lysspredning	110°

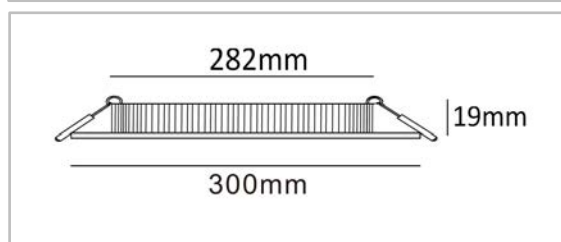

Dimmetype

Type	Dimbar faseavsnitt
------	--------------------

Beskyttelse

Isolasjonsklasse	Klasse II
IP-grad	IP20

Materialer og overflater

Armaturhus	Aluminium die-cast
Farge	Matt hvit (RAL 9003)
Optikk	PC
LGP	3mm

Energi og godkjenning

Energiklasse	A-AA+
Godkjenning	CE
Safety standard	EN 60598-1:2015, EN 60598-2-2:2012, EN 62471:2008, EN 62493:2015

Montering/Tilkobling

Montering	Innfelling
Kabling	1,5m ledning med Euro plugg


Dimensjoner (mm)

Høyde (H)	19 mm
Diameter (D)	Ø300 mm
Innfellingsdiameter	Ø282 mm
Vekt	0,83 kgs

Forpakning

Eske dimensjon	360x310x45 mm
Eske Vekt	0,88 kgs
Kartong Dimensjon	500x325x335 mm
Antall/Kartong	10 stk
Kartong Vekt	11,7 kgs

Frisbee

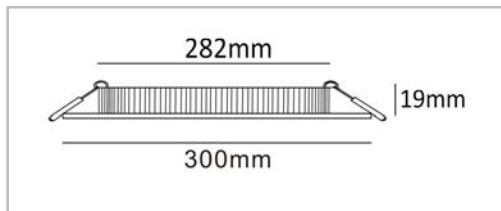

IMPORTANT INFORMATION:


1. Please read this instruction carefully before installation and keep it for future reference.
2. Please conform to the instruction of equipment and installed by professional.
3. Make sure correct voltage applied before use and keep away from heat and vibration source.
4. The light source of this luminaire is not replaceable. When the light source reaches its end of life the whole luminaire shall be replaced.
5. The product is not suitable for any oil pollution ambient or related applications.
6. For indoor use only.

MAIN PARAMETER:

Product	233004
Rated Voltage	220-240V 50/60Hz
LED watt	24W
System eff	26W
LED	2016 SMD LED
LED Driver	Constant Current 1000mA
Color Temperature	3000K
Protection	Class II
Beam Angle	110°
IP Rated	IP20
Operation Temperature	-25°C <ta<45°C
Cut-out	Ø282mm
Product Size	Ø300mmxH19mm


INSTALLATION INSTRUCTIONS:

1. Always switch off the power supply before installation.
2. Make sure all parts are ready when open the box and prepare the installation tools the lighting needs.
3. Should be installed by qualified electricians.
4. If there is any damage on the housing or glass cover, should view it as disqualified product that cannot be used.
5. If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.

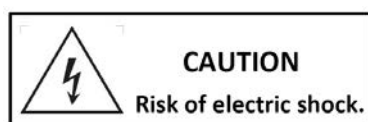


INSTALLATION STEPS:

1. Cut-out for the downlight.

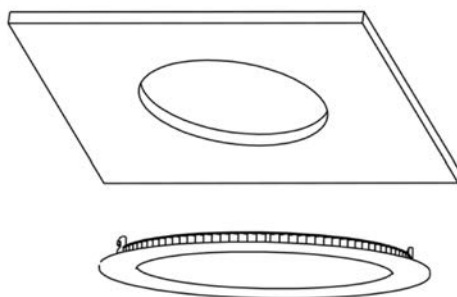

Article nr	Cut-Out
233004	Ø282mm

2. This luminaire is pre-wired with 1,5m cable and Euro plug for connection to the Mains supply. Slide the mounting spring clips into the ceiling cut-out and push the luminaire up into cutting hole. Ensure that it is securely located.

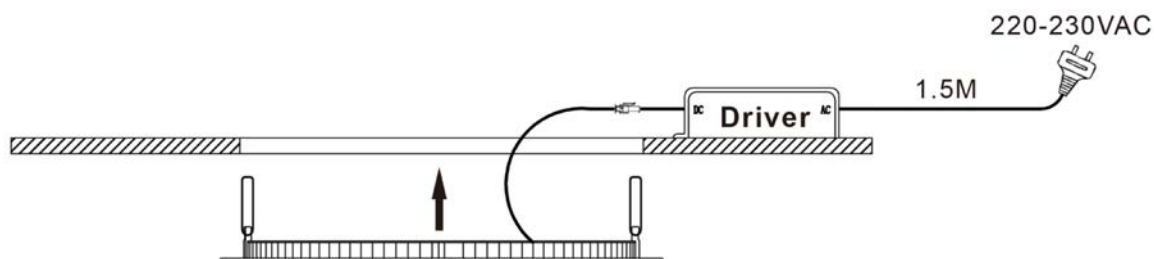

3. Switch on the power supply.

