
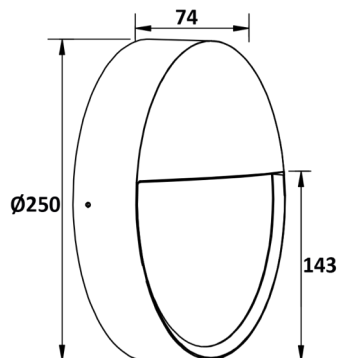


FDV DOKUMENT


Bulkhead 12W Øyelokk Sort
32 416 06 / 261205

ipasTM



Art nr	El nr	Produktnavn	Å	Lysytels e	DIM	System eff	CRI	Lys farge	IP	Farge
261205	32 416 06	Bulkhead 12W Øyelokk	110°	1000 lm	Triac	12W	>80	3000K	65	Sort

Tekniske data:	10W (System effekt 12W)
Spennings:	200-240VAC 50/60Hz
LED Chip	Epistar SMD
Lysytelse:	1000 lm
Lysfarge:	3000K
CRI/Ra:	>80
Strålingsvinkel:	110°
Utbyttbar LED:	Nei
Driftsstrøm:	150mA konstantstrøm
Dimming:	Triac DIM
Sertifisert:	CE
Omgivelsestemp:	-20°C +45°C
Materiale:	PC, aluminium
Farge:	Sort (RAL 9005)
IP Klasse:	IP65
IK Klasse:	IK10
Isolasjonsklasse:	Klass I
Levetid:	50 000 L80
Produktstørrelse:	Ø250x143xW74mm
Vekt:	1,10 kgs
Antall per eske:	1stk Dimensjon: 275x275x280mm Vekt: 1,30 kgs
Antall per ytterkartong:	10stk Dimensjon: 590x529x295mm Vekt: 14,0 kgs

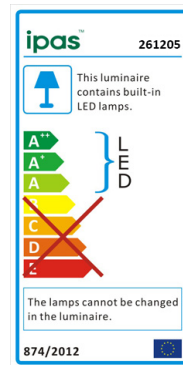

Rengjøring:

Planmessig rengjøring gir deg best belysning over tid.

Gjør anlegg alltid strømløst før rengjøring.

Det anbefales støvtørking med mikrofiber. Intervaller avhenger av bruksområdets støv-/smussmengde. Unngå sterke kjemikalier (pH>7) og vær varsom med frontlinse eller reflektor hvis denne er tilgjengelig. Ikke spray midler direkte på armatur. Særlig tilsmussede områder kan rengjøres med mildt såpevann, men prøv på et avgrenset område først. LED Driver eller åpne komponenter må ikke utsettes for vann eller fuktighet. GARANTI: IPAS yter 5 års garanti. Se også ASLEM12 for mer informasjon.

Resirkulering/WEEE:

Produktet er definert som miljøavfall og skal samles inn av et EE-returselskap. IPAS er medlem av Renas AS. Se mer på www.renas.no



IPAS AS



Østre Rosten 2A 7075 TILLER

www.ipas.no post@ipas.no Tlf 40 00 15 59

V.06.06.2019



Bulkhead 12W

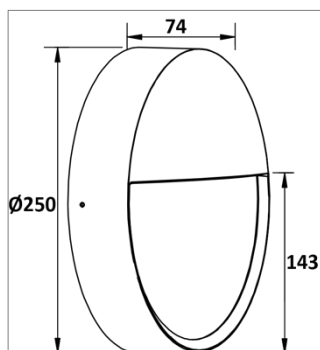

IMPORTANT INFORMATION:



1. Please read this instruction carefully before installation and keep it for future reference.
2. Please conform to the instruction of equipment and installed by professional.
3. Make sure correct voltage applied before use and keep away from heat and vibration source.
4. The light source of this luminaire is not replaceable. When the light source reaches its end of life the whole luminaire shall be replaced.
5. The product is not suitable for any oil pollution ambient or related applications.
6. For indoor and outdoor use.

MAIN PARAMETER:

Product:	261205
Rated Voltage	AC 200-240V 50/60Hz
LED watt	10W
System eff	12W
LED	Epistar SMD 2835 LED
LED Driver	150mA Constant Current
Color Temperature	3000K
Protection	Class I
Beam Angle	110°
IP Rated	IP65
Operation Temperature	-20°C<ta<45°C
Product Size:	Ø250mmxW74mm

INSTALLATION INSTRUCTIONS:

1. Always switch off the power supply before installation.
2. Make sure all parts are ready when open the box and prepare the installation tools the lighting needs.
3. Should be installed by qualified electricians.
4. If there is any damage on the housing or glass cover, should view it as disqualified product that cannot be used.

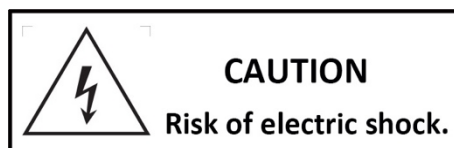

INSTALLATION STEPS:

1. Select the required position for the luminaire.

Step 1 Take out the lamp and accessory.	Step 2 Make the frame, diffuser and back housing separately.
--	---

2. Ensure the luminaire is securely fixed to the wall.

Step 3 Fix the back housing on the wall or ceiling by screws.	Step 4 Choose the color temperature with DIP switch if it's the color changeable version, then connect the wires well.
--	---

3. Connect Mains supply to the luminaire.

Step 5 Connect the DC plug(if with Emergency , connect the plugs between the battery and driver), put back the cover to the back plate and fix it by screws	Step 6 Buckle the frame back and fix it by proper tools.
---	---

4. Switch on the power supply.

Step 7

Installation finished, turn on the switch.