


FDV

Sola SMD 75W Asym

El nr	32 104 08
Article nr	508016
EAN	7090015374909



LUMILEDS INVENTRONICS AkzoNobel

Lysteknikk

Type lyskilde	LED (Lumileds SMD LED)
Spenning	100-277VAC 50/60Hz
Watt	67,5W
Systemeffekt (W)	75W
Effektiv lysstrøm (lm)	11250 lm
Effekt	150 lm/W
Fargetemperatur	4000K
Fargegjengivelse (CRI)	Ra>80
MacAdams faktor	SDCM<3
Levetid (IEC 62717 Ta25)	100 000h L80
Lysspredning	80x150°

Dimmetype

Type	Ikke Dimbar
------	-------------

Beskyttelse


Isolasjonsklasse	Klasse I
IP-grad (armaturhus)	IP65
IP-grad (driver)	IP67
IK-grad	IK10

Materialer og overflater

Armaturhus	Aluminium Die-cast
Farge	Mørk grå (RAL7024)
Optikk	PC

Energi og godkjenning

Energiklasse	A+-A++
Godkjenning	CE, RoHS
Safety standard	EN 60698-1:2015, AMD1:2018, EN 60598-2-3:2003, AMD1:2011, EN 62031:2008+A1:2013
EMC standard	EN 61547:2009, EN55015:2013+A1:2015, EN 61000-3-2:2014, EN 61000-3-3:2013

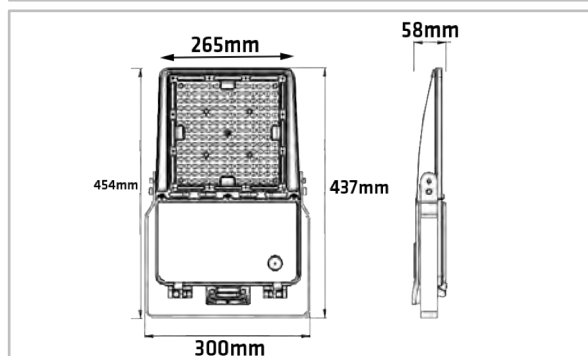

Montering/Tilkobling

Montering	Utenpåliggende
Kabling	1,5m ledning AC



Dimensjoner (mm)

Lengde (L)	265 mm
Høyde (H)	437 mm
Bredde (W)	58 mm
Vekt	4,40 kgs

Forpakning

Kartong Dimensjon	475x125x345 mm
Antall/Kartong	1 stk
Kartong Vekt	4,60 kgs

Sola SMD (Big Lens)

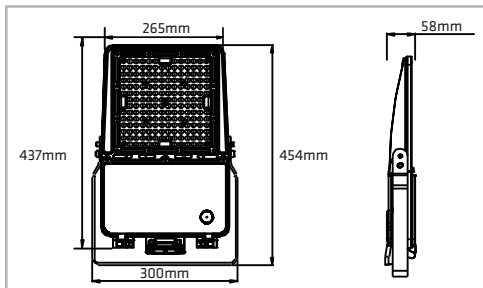

IMPORTANT INFORMATION:



1. Please read this instruction carefully before installation and keep it for future reference.
2. Please conform to the instruction of equipment and installed by professional.
3. Make sure correct voltage applied before use and keep away from heat and vibration source.
4. The light source of this luminaire is not replaceable. When the light source reaches its end of life the whole luminaire shall be replaced.
5. The product is not suitable for any oil pollution ambient or related applications.
6. For indoor and outdoor use.

MAIN PARAMETER:

Product	508016	510006	515006/515106
Rated Voltage	AC 100-277V 50/60Hz	AC 100-277V 50/60Hz	AC 100-277V 50/60Hz
LED watt	67,5W	90W	139,2W
System eff	75W	100W	150W
LED	Lumileds SMD 3030 LED	Lumileds SMD 3030 LED	Lumileds SMD 3030 LED
LED Driver	Constant Current 1,5A	Constant Current 2,1A	Constant Current 2,9A
Color Temperature	4000K	4000K	4000K
Protection	Class I	Class I	Class I
Beam Angle	80x150°	100°	100°/80x150°
IP Rated	IP65	IP65	IP65
Operation Temperature	-40°C <ta<50°C	-40°C <ta<50°C	-40°C <ta<50°C
Product Size	300mmx454mmx58mm	300mmx454mmx58mm	300mmx454mmx58mm

INSTALLATION INSTRUCTIONS:


1. Always switch off the power supply before installation.
2. Make sure all parts are ready when open the box and prepare the installation tools the lighting needs.
3. Should be installed by qualified electricians.
4. If there is any damage on the housing or glass cover, should view it as disqualified product that cannot be used.
5. If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.

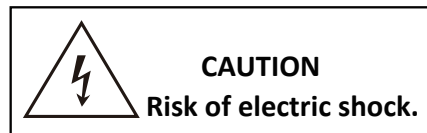

Art nr. 508016/510006
/515006/515106

INSTALLATION STEPS:



1. Select the required position for the luminaire. Ensure the fixings are suitable to withstand the weight of this product.

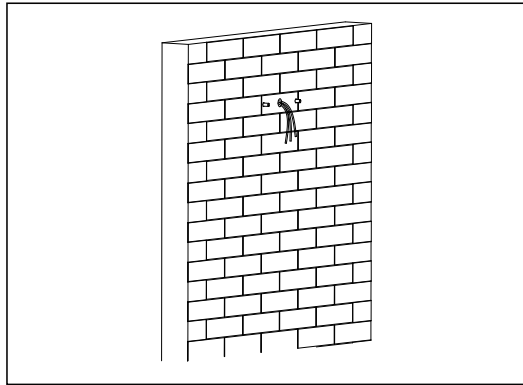

2. Provide a power supply to the luminaire using a suitable cable. Connect the mains supply to the luminaire.

- Mains supply LIVE (Brown) - L
- Mains supply NEUTRAL (Blue) - N
- Mains supply EARTH (Yellow/Green) - E

IMPORTANT: These luminaires are Class I and must be earthed.

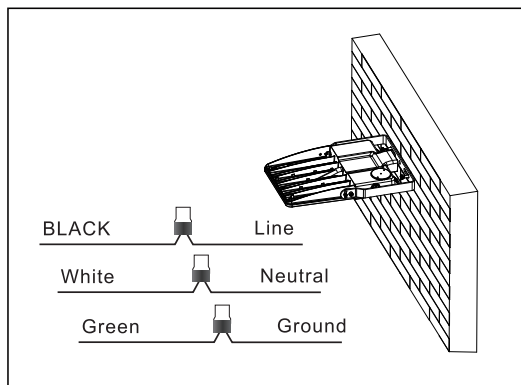

Terminal block not included.
Installation may require advice from a qualified person

3. Adjust angle to required position. Switch on the power supply.

