


FDV DOKUMENT

ipasTM

Cosmo Quick Direct 6W Satin 32 355 01 / 230502

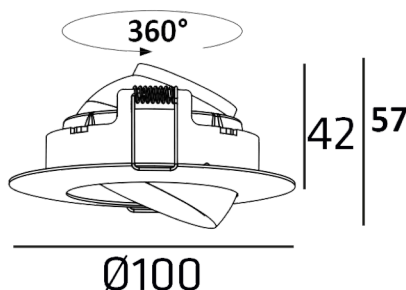

Art nr	El nr	Produktnavn	Å	Lysytelse	DIM	System eff	CRI	Lys farge	IP	Farge
230502	32 355 01	Cosmo Quick Direct 6W	60°	520 lm	Triac	5,5W	>80	2700K	44	Satin


CITIZEN

Micro HumanTech

Tekniske data:	5W (System effekt 5,5W)
Spennings:	220-240VAC 50/60Hz
LED Chip	Citizen COB LED
Lysytelse:	520 lm
Lysfarge:	2700K
CRI/Ra:	>80
Strålingsvinkel:	60°
Utbyttbar LED:	Nei
Driftsstrøm:	500mA konstantstrøm
Dimming:	Dimbar GLE
Sertifisert:	CE
Omgivelsestemp:	-25°C +45°C
Materiale:	Die-casting aluminium
Farge:	Satin
IP Klasse:	IP44
Isolasjonsklasse:	Klass II
Levetid:	62 000 L80
HulltakØ	Ø83-86mm
Produktstørrelse:	Ø100x42mm
Vekt:	0,28 kgs
Antall per eske:	1stk Dimensjon: 125x125x75mm Vekt: 0,29 kgs
Antall per ytterkartong:	36stk Dimensjon: 520x395x250mm Vekt: 12,6 kgs

Resirkulering/WEEE:

Produktet er definert som miljøavfall og skal samles inn av et EE-returselskap.
IPAS er medlem av Renas AS. Se mer på www.renas.no




Rengjøring:

Planmessig rengjøring gir deg best belysning over tid.

Gjør anlegg alltid strømløst før rengjøring.

Det anbefales støvtørking med mikrofiber. Intervaller avhenger av bruksområdets støv-/smusmengde. Unngå sterke kjemikalier (ph>7) og vær varsom med frontlinse eller reflektor hvis denne er tilgjengelig. Ikke spray midler direkte på armatur. Særlig tilsussete områder kan rengjøres med mildt såpevann, men prøv på et avgrenset område først. LED Driver eller åpne komponenter må ikke utsettes for vann eller fuktighet.
GARANTI: IPAS yter 5 års garanti. Se også ASLE12 for mer informasjon.



IPAS AS

Østre Rosten 2A 7075 TILLER




www.ipas.no post@ipas.no

Tlf 40 00 15 59

V.08.07.2019



Cosmo Quick Direct

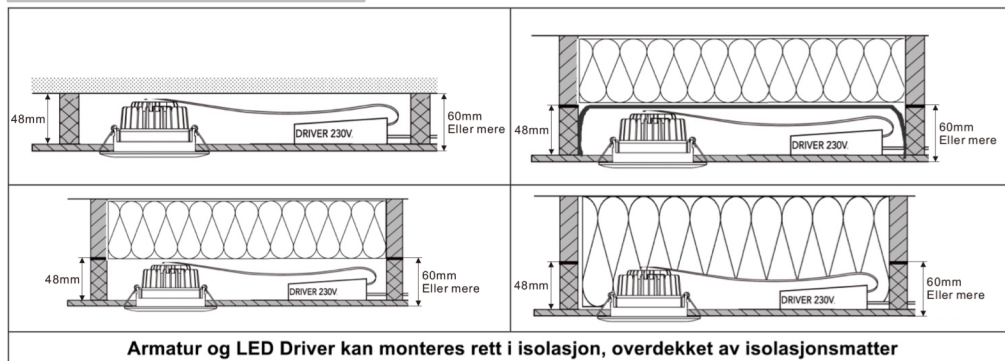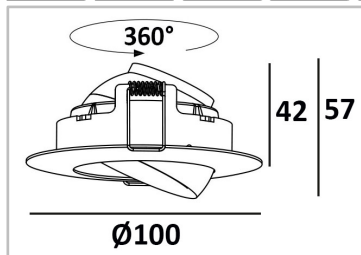

IMPORTANT INFORMATION:



1. Please read this instruction carefully before installation and keep it for future reference.
2. Please conform to the instruction of equipment and installed by professional.
3. Make sure correct voltage applied before use and keep away from heat and vibration source.
4. The light source of this luminaire is not replaceable. When the light source reaches its end of life the whole luminaire shall be replaced.
5. The product is not suitable for any oil pollution ambient or related applications.
6. For indoor use only.

MAIN PARAMETER:

Product	230502	230504
Rated Voltage	AC 220-240V 50/60Hz	AC 220-240V 50/60Hz
LED watt	5W	5W
System eff	5,5W	5,5W
LED	Citizen LED COB	Citizen LED COB
LED Driver	Constant Current 500mA	Constant Current 500mA
Color Temperature	2700K	2700K
Protection	Class II	Class II
Beam Angle	60°	60°
IP Rated	IP44	IP44
Operation Temperature	-25°C <ta<45°C	-25°C <ta<45°C
Cut-out	Ø83-86mm	Ø83-86mm
Product Size	Ø100mmxH42mm	Ø100mmxH42mm


INSTALLATION INSTRUCTIONS:

1. Always switch off the power supply before installation.
2. Make sure all parts are ready when open the box and prepare the installation tools the lighting needs.
3. Should be installed by qualified electricians.
4. If there is any damage on the housing or glass cover, should view it as disqualified product that cannot be used.
5. If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.




INSTALLATION STEPS:

1. Cut-out for the downlight.



Cut-out: Ø83-86mm

2. Connect Mains supply to the quick connection terminal block of LED driver. Slide the mounting spring clips into the ceiling cut-out and push the luminaire up into cutting hole. Ensure that it is securely located.

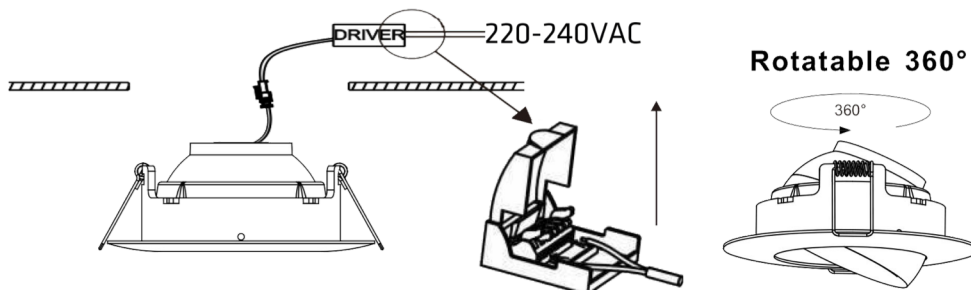

3. Switch on the power supply.

