




EPISTAR



	A	B	Cut-out
10W	Ø185mm	67mm	Ø160-175mm
20W	Ø228mm	88,4mm	Ø200-210mm

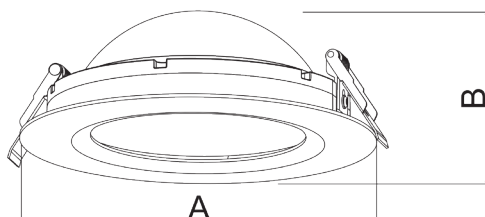

	Vekt	Stk
10W	0,42kgs	12stk 410x410x310mm
20W	0,59kgs	12stk 505x505x340mm



Globe er et innfelt armatur med veldig «mykt» lysutfall. Diodene sitter i kanten og hele globen er en reflektor. Indirekte belysning på sitt vakreste. Hulltak tilpasset de fleste nåværende armaturer.

Dimbar GLE.

Teknisk Info

Input	200-240V AC
PF	>0,9
Levetid	50 000h L80
SDCM	MacAdams <3

Art. nr.	El. nr.	Produktnavn	☆	Lysytelse	DIM	System eff.	CRI	Lys farge	IP	Farge
291004	32 416 04	Globe	120°	650 lm	fase-avsnitt	10W	>80	3000K	20	Hvit
292014	32 416 05	Globe	120°	1367 lm	fase-avsnitt	20W	>80	3000K	20	Hvit

