


FDV DOKUMENT 3236426

ipasTM

Optima Cylinder 25W 830 Sort

32 364 26 / 462505

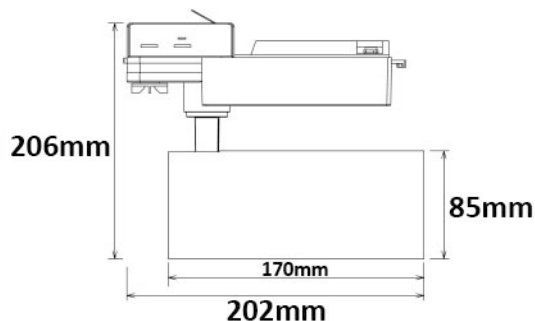


Art nr	El.nr	Tekst	Farge	Lysfarge	Lumen	Størrelse
462505	32 364 26	Optima Cylinder 25W 3T	Sort	Varmhvit 3000K	2560K	202x85x206mm

CITIZEN
Micro HumanTech

Tekniske data :	21W (System effekt 25W)
Spenning :	230-240VAC 50/60Hz
LED chip :	CITIZEN COB LED
Lysytelse :	2560lm
Lysfarge :	3000K
CRI/Ra :	>80
Strålingsvinkel :	36°
Utbyttbar LED :	Nei
Driftsstrøm :	580mA konstantstrøm
Dimming :	Ikke Dimbar
Sertifisert :	CE
Omgivelsestemp :	-20°C +45°C
Materiale :	Aluminium, PC
Farge :	Sort
IP Klasse armaturhus :	IP20
Isolasjonsklasse :	Klasse I
Montasje :	3-tennings skinner
Levetid :	50 000 timer (L80)
Produktstørrelse :	202x85x206mm
Vekt :	750g
Antall per eske :	1 stk
Antall per ytterkartong :	12 stk
Dimensjon :	265x135x255 mm
Dimension :	550x430x490 mm
Vekt :	0,86kgs
Vekt :	11,2 kgs

Resirkulering/WEEE:

Produktet er definert som miljøavfall og skal samles inn av et EE-returselskap.
IPAS er medlem av Renas AS. Se mer på www.renas.no

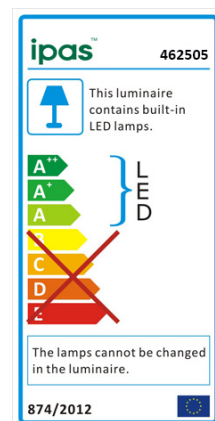

Rengjøring:

Planmessig rengjøring gir deg best belysning over tid.

Gjør anlegg alltid strømløst før rengjøring.

Det anbefales støvtørking med mikrofiber. Intervaller avhenger av bruksområdets støv-/smussmengde. Unngå sterke kjemikalier (ph>7) og vær varsom med frontlinse eller reflektor hvis denne er tilgjengelig. Ikke spray midler direkte på armatur. Særlig tilsnusede områder kan rengjøres med mildt såpevann, men prøv på et avgrenset område først. LED Driver eller åpne komponenter må ikke utsettes for vann eller fuktighet.
GARANTI: IPAS yter 5 års garanti. Se også ASLEM12 for mer informasjon.



IPAS AS

Østre Rosten 2A 7075 TILLER


www.ipas.no

post@ipas.no

Tlf 40 00 15 59.

V.04.02.2019



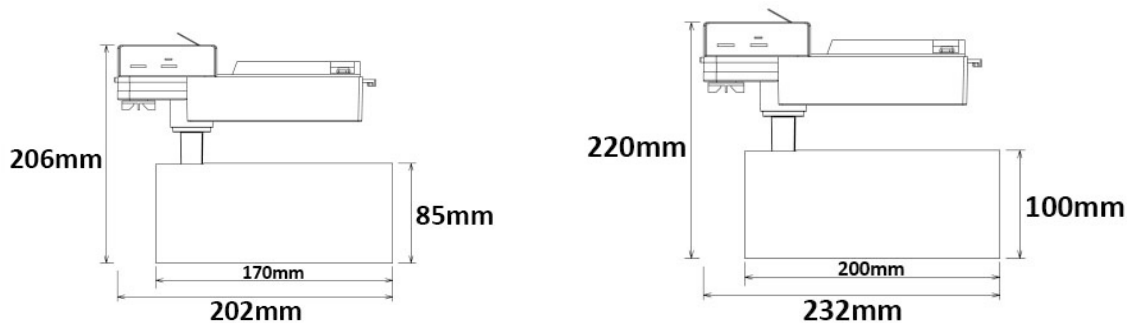

IMPORTANT INFORMATION:



1. Please read this instruction carefully before installation and keep it for future reference.
2. Please conform to the instruction of equipment and installed by professional.
3. Make sure correct voltage applied before use and keep away from heat and vibration source.
4. The light source of this luminaire is not replaceable. When the light source reaches its end of life the whole luminaire shall be replaced.
5. For indoor use only.

MAIN PARAMETER:

Product	462504/462505	464204/464205
Rated voltage	220-240V AC 50/60Hz	220-240V AC 50/60Hz
LED	Citizen COB	Citizen COB
LED rated power	21W	37W
System power	25W	42W
LED Driver	Constant Current 580mA	Constant Current 1050mA
Color Temperature	3000K Warm White	4000K Nature White
Protection	CLASS I	CLASS I
Beam angle	36°	36°
IP rated	IP20	IP20
Product size	202mmx85mmx206mm	232mmx100mmx220mm


INSTALLATION INSTRUCTIONS:

1. Always switch off the power supply before installation.
2. Make sure all parts are ready when open the box and prepare the installation tools the lighting needs.
3. Should be installed by qualified electricians.
4. If there is any damage on the housing or glass cover, should view it as disqualified product that cannot be used.
5. If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.

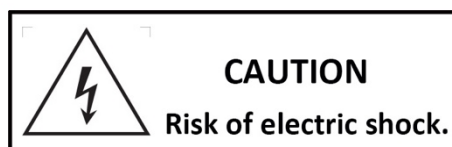


INSTALLATION STEPS:

1. When installing the spotlight into track, ensure that the Polarity indicator is on the same side as the Polarity line on the track. These track spotlights will only fit into the track one way. When the spotlight is in position on the track, turn the locking lever to point along the length of the track to lock the spotlight in position.

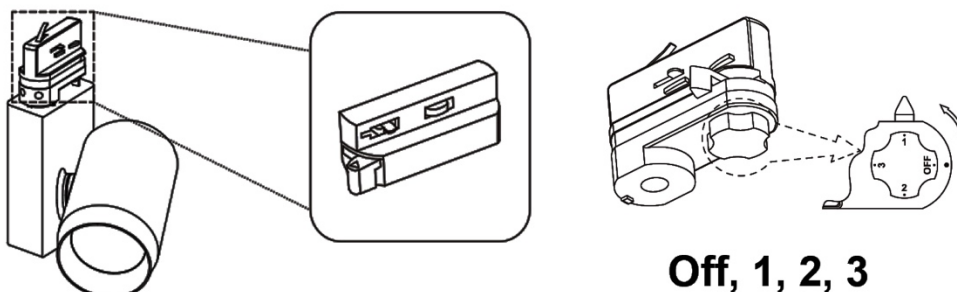

2. Ensure that when installed, the spotlights are not in an obtrusive position or in a position where they may be knocked or damaged.

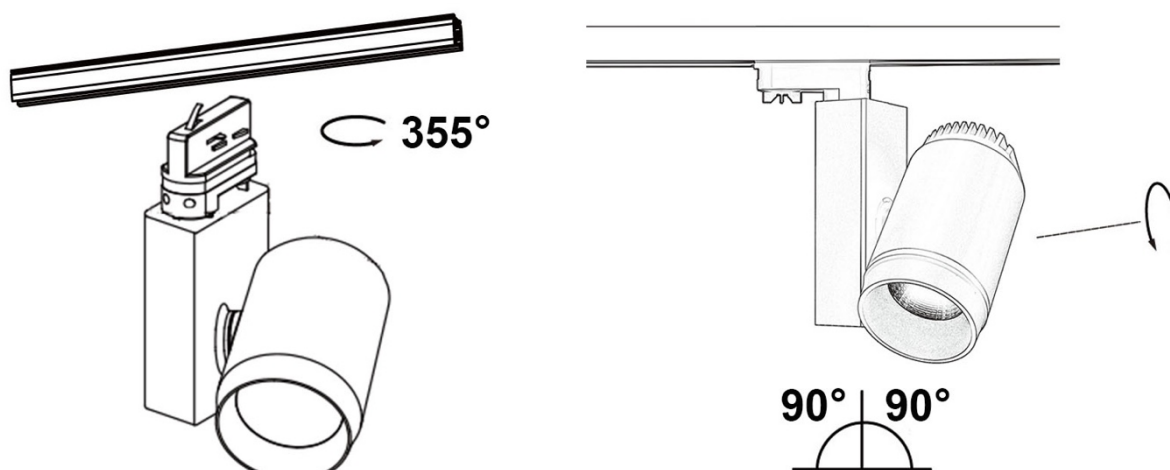

3. Once the spotlight has been positioned switch on the mains power supply.

