


FDV


LED Panel Eco Kit 120x30

El nr	32 416 00
Article nr	121204
EAN	7090015374633

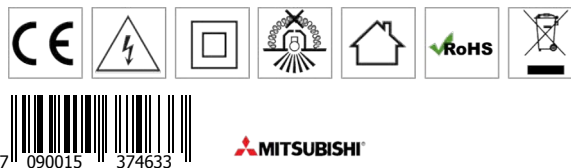

Lysteknikk

Type lyskilde	LED (SMD LED)
Spennning	230VAC 50/60Hz
Watt	36W
Systemeffekt (W)	40W
Effektiv lysstrøm (lm)	4000lm
Effekt	100lm/W
Fargetemperatur	4000K
Fargegjengivelse (CRI)	Ra85
MacAdams faktor	SDCM<3
Levetid	70000h L80 (IEC62717 Ta25)
Lysspredning	120°

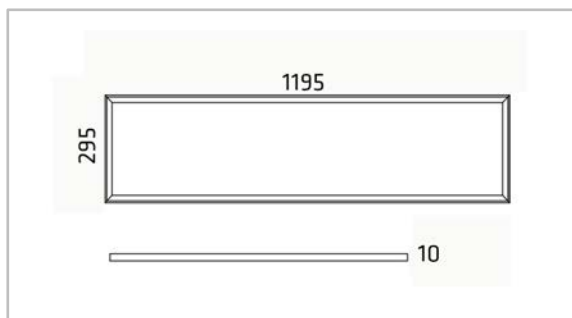

Dimmetype

Type	Ikke dimbar
------	-------------

Beskyttelse

Isolasjonsklasse	Klasse II
IP-grad (armaturhus)	IP40
IP-grad (LED driver)	IP20

Montering/Tilkobling

Montering	Innfelling
Kabling	Med 1,5 ledning or Euro plugg

Materialer og overflater

Armaturhus	Metallramme og bakplate
Farge	Matt hvit (RAL 9003)
Optikk	PC
LGP	3mm (Mitsubishi)

Dimensjoner (mm)

Lengde (L)	1195 mm
Bredde (W)	295 mm
Høyde (H)	10 mm
Vekt	3,40 kgs



Energi og godkjenning

Energiklasse	A-A+
Godkjenning	CE, TUV, RoHS
Safety standard (TUV)	EN 60598-1:2015, EN 60598-2-2:2012, EN 62471:2008, EN 62493:2015 AfPS GS 2014:01 Par. 3.1

Forpakning

Eske dimensjon	1260x360x43 mm
Eske Vekt	3,90 kgs
Kartong Dimensjon	420x1320x250 mm
Antall/Kartong	5 stk
Kartong Vekt	20,70 kgs

LED Panel Eco Kit

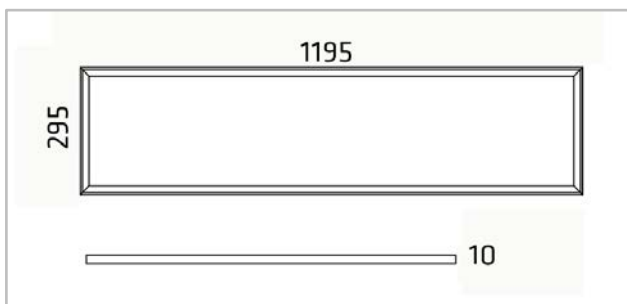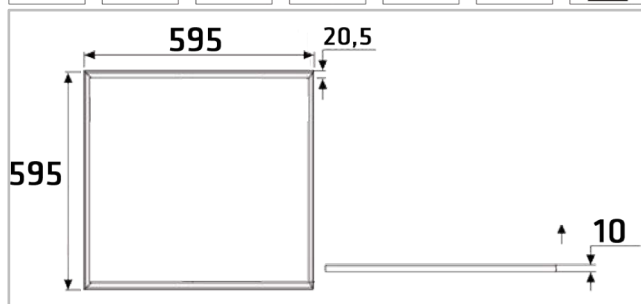

IMPORTANT INFORMATION:

1. Please read this instruction carefully before installation and keep it for future reference.
2. Please conform to the instruction of equipment and installed by professional.
3. Make sure correct voltage applied before use and keep away from heat and vibration source.
4. The light source of this luminaire is not replaceable. When the light source reaches its end of life the whole luminaire shall be replaced.
5. The product is not suitable for any oil pollution ambient or related applications.
6. For indoor use only.

MAIN PARAMETER:



Product	124004	124014	121214	121204
Rated Voltage	AC 180-240V 50/60Hz	AC 180-240V 50/60Hz	AC 180-240V 50/60Hz	AC 180-240V 50/60Hz
LED watt	36W	36W	36W	36W
System eff	40W	40W	40W	40W
LED	SMD LED 2835	SMD LED 2835	SMD LED 2835	SMD LED 2835
LED Driver	Constant Current 950mA	Constant Current 950mA	Constant Current 950mA	Constant Current 950mA
Color Temperature	3000K	4000K	3000K	4000K
Protection	Class II	Class II	Class II	Class II
Beam Angle	120°	120°	120°	120°
IP Rated	IP40	IP40	IP40	IP40
Operation Temperature	-20°C <ta<50°C	-20°C <ta<50°C	-20°C <ta<50°C	-20°C <ta<50°C
Product Size	595x595x10mm	595x595x10mm	1195x295x10mm	1195x295x10mm

Available Mounting Hardware (Not Included – Purchase separately)

100014	Festebrakett
100024	Ramme for utenpåliggende montering 595x595
100224	Ramme FIX for utenpåliggende montering 595x595
110014	Wireoppheng

INSTALLATION INSTRUCTIONS:


1. Always switch off the power supply before installation.
2. Make sure all parts are ready when open the box and prepare the installation tools the lighting needs.
3. Should be installed by qualified electricians.
4. If there is any damage on the housing or glass cover, should view it as disqualified product that cannot be used.
5. If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.

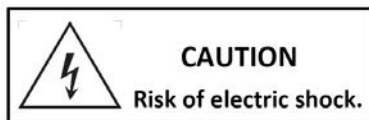


Art nr. 124004/124014/121204/121214

INSTALLATION STEPS:


A. Built-in type

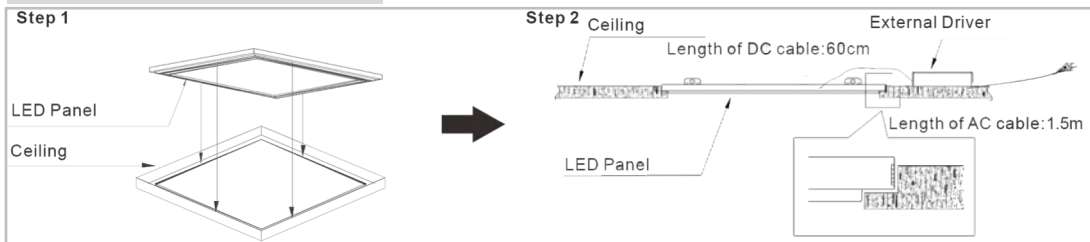

B. Mounted type

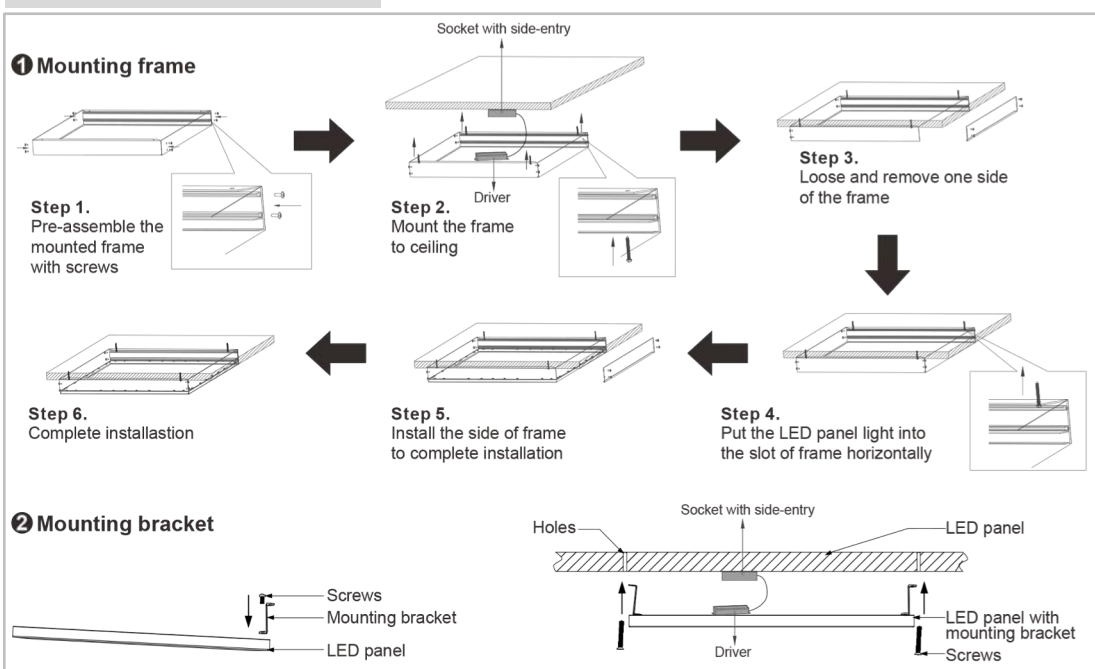

Following sockets are recommended to use when installing with mounting frame or mounting bracket.
EI. nr. 15 021 72 2xEuro and 1xShuko
EI. nr. 15 021 84 4xEuro



C. Suspended type

