


FDV


Soft Quick Direct DTV

El nr	32 173 02
Article nr	130604
EAN	7090015372813



Lysteknikk

Type lyskilde	LED (Sunpu COB LED)
Spennning	230VAC 50/60Hz
Watt	6W
Systemeffekt (W)	8W
Effektiv lysstrøm (lm)	533lm
Effekt	67lm/W
Fargetemperatur	2000K-2800K
Fargegjengivelse (CRI)	Ra>80
MacAdams faktor	SDCM<3
Levetid	62000 L80
Lysspredning	50°

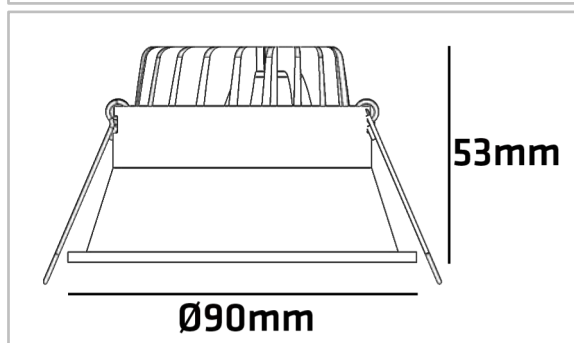

Dimmetype

Type	Dimbar faseavsnitt
------	--------------------

Beskyttelse

Isolasjonsklasse	Klasse II
IP-grad	IP44

Montering/Tilkobling

Montering	Innfelling
Kabling	Hurtigklemme

Materialer og overflater

Armaturhus	Aluminium die-cast
Farge	Matt hvit (RAL 9010)
Optikk/Reflektor	Acrylic/Alu

Dimensjoner (mm)

Høyde (H)	53 mm
Diameter (D)	Ø90 mm
Innfellingsdiameter	Ø83 mm
Vekt	0,24 kgs




Energi og godkjenning

Energiklasse	A++
Godkjenning	CE, RoHS
Safety standard	EN 61347-2-13:2014+AMD1:2017, EN 6134701:2015
EMC standard	EN 55015:2013+A1:2015, EN 61547:2009, EN 61000-3-2:2014, EN 61000-3-3:2013

Forpakning

Eske dimensjon	115x115x75mm
Eske Vekt	0,25 kgs
Kartong Dimensjon	480x460x330 mm
Antall/Kartong	48 stk
Kartong Vekt	15,6 kgs

Soft Quick Direct

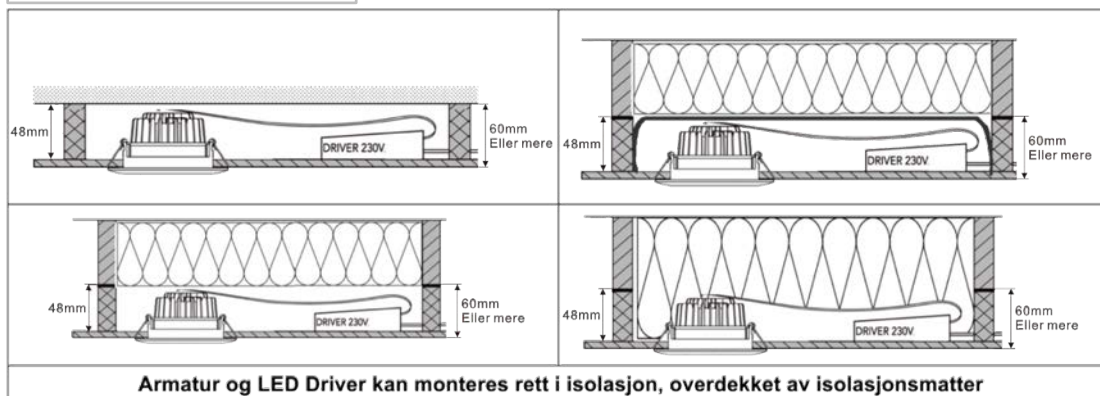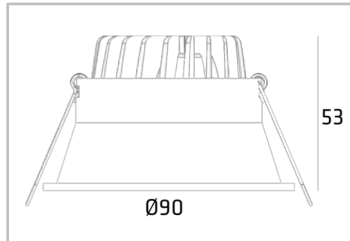

Armatur og LED Driver kan monteres rett i isolasjon, overdekket av isolasjonsmatter

IMPORTANT INFORMATION:



1. Please read this instruction carefully before installation and keep it for future reference.
2. Please conform to the instruction of equipment and installed by professional.
3. Make sure correct voltage applied before use and keep away from heat and vibration source.
4. The light source of this luminaire is not replaceable. When the light source reaches its end of life the whole luminaire shall be replaced.
5. The product is not suitable for any oil pollution ambient or related applications.
6. For indoor use only.

MAIN PARAMETER:

Product	130504	130604 DTV
Rated Voltage	AC 220-240V 50/60Hz	AC 220-240V 50/60Hz
LED Watt	5W	6W
System eff	6W	8W
LED	Sunpu LED COB	Sunpu LED COB
LED Driver	Constant Current 350mA	Constant Current 350mA
Color Temperature	2700K	2000K-2800K
Protection	Class II	Class II
Beam Angle	50°	50°
IP Rated	IP44	IP44
Operation Temperature	-25°C <ta<45°C	-25°C <ta<45°C
Cut-out	Ø83mm	Ø83mm
Product Size	Ø90mmxH53mm	Ø90mmxH53mm


INSTALLATION INSTRUCTIONS:

1. Always switch off the power supply before installation.
2. Make sure all parts are ready when open the box and prepare the installation tools the lighting needs.
3. Should be installed by qualified electricians.
4. If there is any damage on the housing or glass cover, should view it as disqualified product that cannot be used.
5. If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.

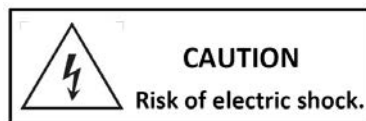


INSTALLATION STEPS:

1. Cut-out for the downlight.



Article nr	Cut-Out
130504	Ø83 mm
130604	Ø83 mm

2. Connect Mains supply to the quick connection terminal block of LED driver. Slide the mounting spring clips into the ceiling cut-out and push the luminaire up into cutting hole. Ensure that it is securely located.

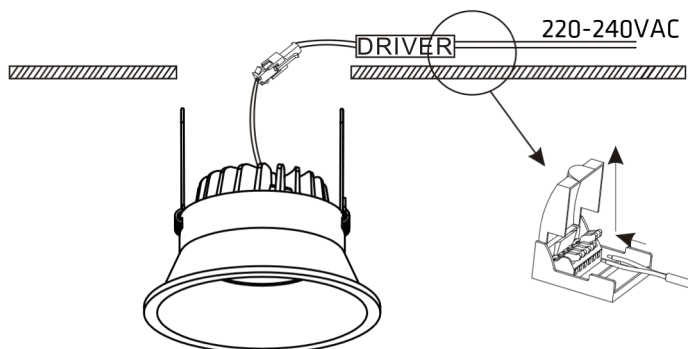

3. Switch on the power supply.

