



FDV DOKUMENT

Inka Opp/Ned 45W DIM


32 416 03 / 124504

ipasTM



Art nr	El nr	Produktnavn	Å	Lysytelse	DIM	System eff	CRI	Lys farge	IP	Farge
124504	32 416 03	Inka Opp/Ned	270°	3091 lm	Triac	45W	>80	3000K	40	Hvit

Tekniske data:	40W (System effekt 45W)
Spennings:	200-240VAC 50/60Hz
LED Chip	Epistar SMD
Lysytelse:	3091 lm
Lysfarge:	3000K
CRI/Ra:	>80
Strålingsvinkel:	270°
Utbyttbar LED:	Nei
Driftsstrøm:	1050mA konstantstrøm
Dimming:	Triac DIM
Sertifisert:	CE
Omgivelsestemp:	-20°C +45°C
Materiale:	PC, aluminium
Farge:	Hvit (RAL9016)
IP Klasse:	IP40
IK Klasse:	IK08
Isolasjonsklasse:	Klass I
Levetid:	50 000 L80
Produktstørrelse:	1200x150x19mm
Vekt:	3,30 kgs
Antall per eske:	1stk Dimensjon: 1530x210x70mm Vekt: 3,80 kgs
Antall per ytterkartong:	6stk Dimensjon: 1550x435x230mm Vekt: 21,9 kgs

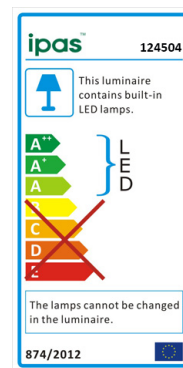

Rengjøring:

Planmessig rengjøring gir deg best belysning over tid.

Gjør anlegg alltid strømløst før rengjøring.

Det anbefales støvtørking med mikrofiber. Intervaller avhenger av bruksområdets støv-/smussmengde. Unngå sterke kjemikalier (pH>7) og vær varsom med frontlinse eller reflektor hvis denne er tilgjengelig. Ikke spray midler direkte på armatur. Særlig tilsmussede områder kan rengjøres med mildt såpevann, men prøv på et avgrenset område først. LED Driver eller åpne komponenter må ikke utsettes for vann eller fuktighet.

GARANTI: IPAS yter 5 års garanti. Se også ASLEM12 for mer informasjon.

Resirkulering/WEEE:

Produktet er definert som miljøavfall og skal samles inn av et EE-returselskap. IPAS er medlem av Renas AS. Se mer på www.renas.no



IPAS AS


Østre Rosten 2A 7075 TILLER

www.ipas.no post@ipas.no Tlf 40 00 15 59

V.06.06.2019



Inka panel opp/ned 45W

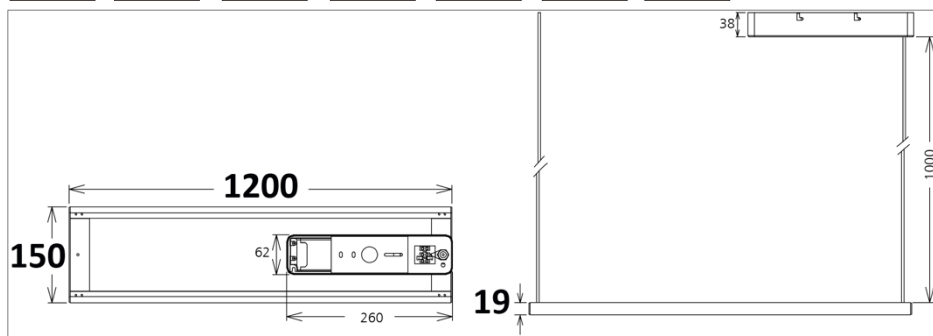

IMPORTANT INFORMATION:



1. Please read this instruction carefully before installation and keep it for future reference.
2. Please conform to the instruction of equipment and installed by professional.
3. Make sure correct voltage applied before use and keep away from heat and vibration source.
4. The light source of this luminaire is not replaceable. When the light source reaches its end of life the whole luminaire shall be replaced.
5. The product is not suitable for any oil pollution ambient or related applications.
6. For indoor use only.

MAIN PARAMETER:

Product:	124504
Rated Voltage	AC 200-240V 50/60Hz
LED watt	40W
System eff	45W
LED	Epistar SMD 4014 LED
LED Driver	1050mA Constant Current
Color Temperature	3000K
Protection	Class I
Beam Angle	270°
IP Rated	IP40
Operation Temperature	-20°C<ta<45°C
Product Size:	L1200mmxW150mmxH19mm


INSTALLATION INSTRUCTIONS:

1. Always switch off the power supply before installation.
2. Make sure all parts are ready when open the box and prepare the installation tools the lighting needs.
3. Should be installed by qualified electricians.
4. If there is any damage on the housing or glass cover, should view it as disqualified product that cannot be used.

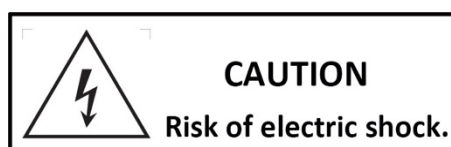


INSTALLATION STEPS:

1. Select the required position for the luminaire. Ensure the luminaire is securely fixed to the ceiling.

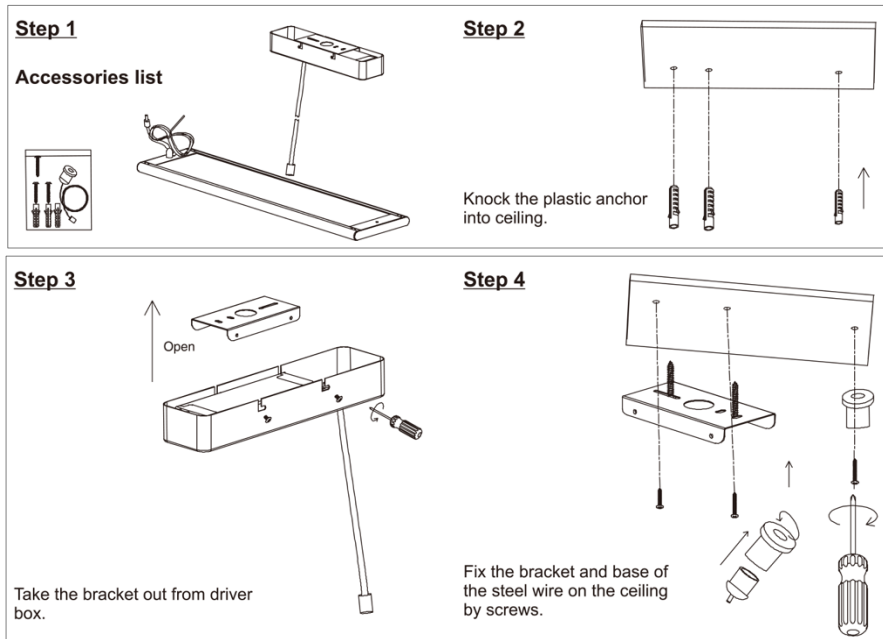

2. Connect Mains supply to the luminaire.

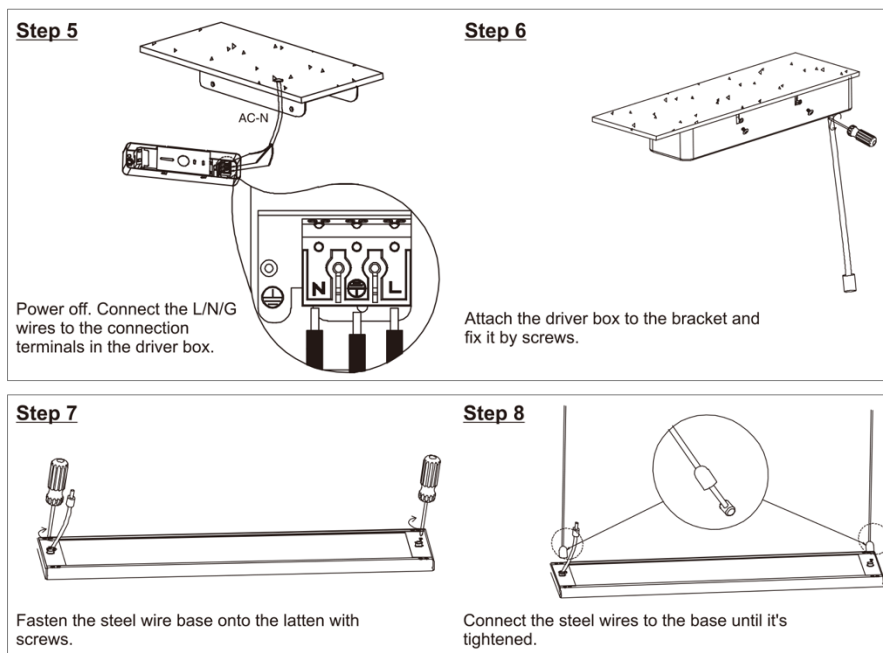

3. Switch on the power supply.

