

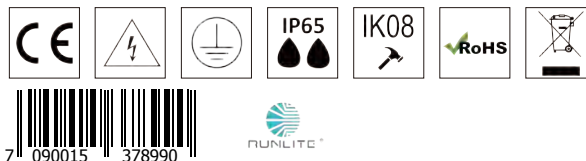


El nr	32 416 09
Article nr	364004
EAN	7090015378990

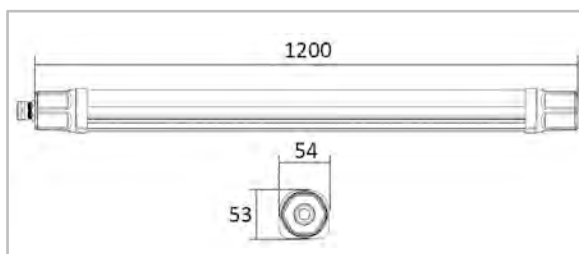

Lysteknikk

Type lyskilde	SMD LED
Spennings	230VAC 50/60Hz
Watt	27W
Systemeffekt (W)	30W
Effektiv lysstrøm (lm)	3600 lm
Effekt	120lm/W
Fargetemperatur	4000K
Fargegjengivelse (CRI)	Ra>80
MacAdams faktor	SDCM≤3
Levetid	92 000 L80 (IEC62717 Ta25)
Lysspredning	120°

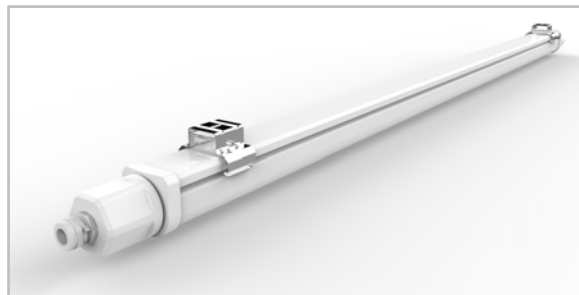

Dimmetype

Type	Ikke Dimbar
------	-------------

Beskyttelse

Isolasjonsklasse	Klasse I
IP-grad (armaturhus)	IP65
IK-grad	IK08

Materialer og overflater

Armaturhus	PC
Farge	Grå/Opal

Energi og godkjenning

Energiklasse	A-A+
Godkjenning	CE
Safety standard	EN 60598-2-1:1989, EN 60598-1:2015, EN 62471:2008, EN 62493:2015, EN 62031:2008+A1:2013+A2:2015
EMC standard	EN 55015:2013+A1:2015, EN 61547:2009, EN 61000-3-2:2014, EN 61000-3-3:2013

Montering/Tilkobling

Montering	Utenpåliggende
Kobling	Hurtigklemme



Dimensjoner (mm)

Lengde (L)	1200 mm
Høyde (H)	53 mm
Bredde (W)	54 mm
Vekt	0,92 kgs

Forpakning

Eske dimensjon	1381x78x78 mm
Eske Vekt	1,14 kgs
Kartong Dimensjon	1390x242x175 mm
Antall/Kartong	6 stk
Kartong Vekt	7,86 kgs

Dense Mini

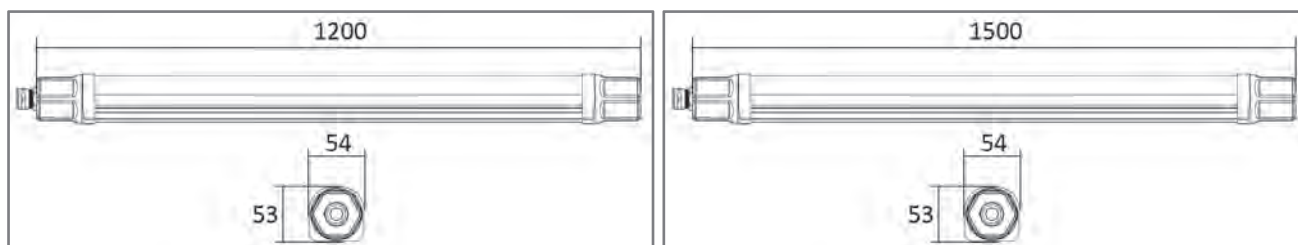

IMPORTANT INFORMATION:



1. Please read this instruction carefully before installation and keep it for future reference.
2. Please conform to the instruction of equipment and installed by professional.
3. Make sure correct voltage applied before use and keep away from heat and vibration source.
4. The light source of this luminaire is not replaceable. When the light source reaches its end of life the whole luminaire shall be replaced.
5. The product is not suitable for any oil pollution ambient or related applications.
6. For indoor and outdoor use under shelter.

MAIN PARAMETER:

Product	364004	365004
Rated Voltage	AC 220-240V 50/60Hz	AC 220-240V 50/60Hz
LED watt	27W	36W
System eff	30W	40W
LED	Runlite SMD 2835 LED	Runlite SMD 2835 LED
LED Driver	Constant Current 325mA	Constant Current 450mA
Color Temperature	4000K	4000K
Protection	Class I	Class I
Beam Angle	120°	120°
IP Rated	IP65	IP65
Operation Temperature	-20°C <ta<40°C	-20°C <ta<40°C
Product Size	1200mmx54mmx53mm	1500mmx54mmx53mm

INSTALLATION INSTRUCTIONS:



1. Always switch off the power supply before installation.
2. Make sure all parts are ready when open the box and prepare the installation tools the lighting needs.
3. Should be installed by qualified electricians.
4. If there is any damage on the housing or glass cover, should view it as disqualified product that cannot be used.



Art nr. 364004/365004

INSTALLATION STEPS:


1. Select the required position for the luminaire. Ensure that it is securely located.

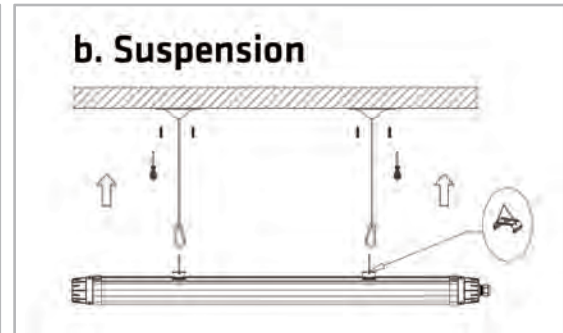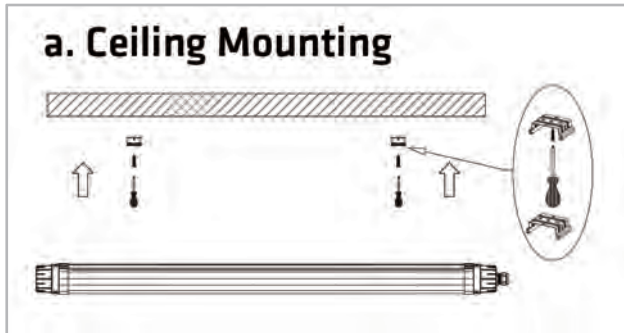


	x 2
	x 2

2. Twist the end cap and connect power supply to the quick release terminal.
 - Mains supply **LIVE (Brown) – L**
 - Mains supply **NEUTRAL (Blue) – N**
 - Mains supply **EARTH (Yellow/Green) - E**

IMPORTANT: The luminaire is Class I and must be earthed.

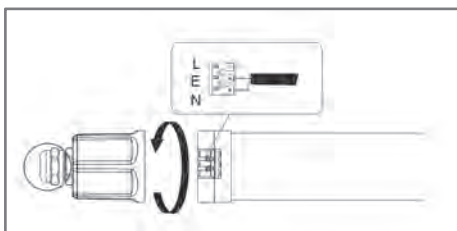

Input Voltage	Max Qty	Size C (mm)
230VAC/30W	23	optional
230VAC/40W	18	optional

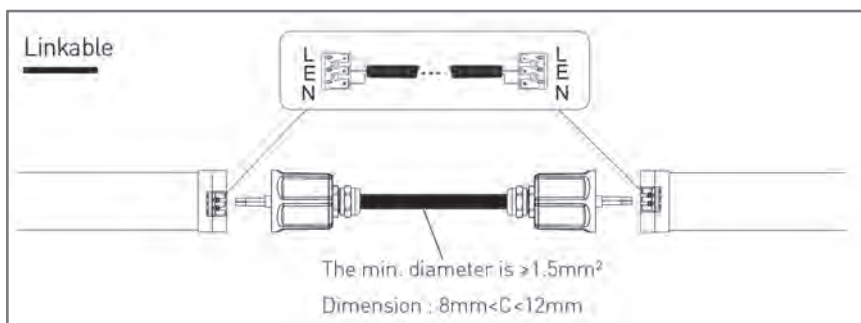

3. Switch on the power supply.