

FDV


Dense NG 50W 1500mm

El nr	33 841 50
Article nr	355089
EAN	7090015371960



Lysteknikk

Type lyskilde	SMD LED
Spennning	230VAC 50/60Hz
Watt	50W
Systemeffekt (W)	50W
Effektiv lysstrøm (lm)	6000lm
Effekt	120lm/W
Fargetemperatur	4000K
Fargegjengivelse (CRI)	Ra>80
MacAdams faktor	SDCM<3
Levetid	92000 L80
Lysspredning	120°

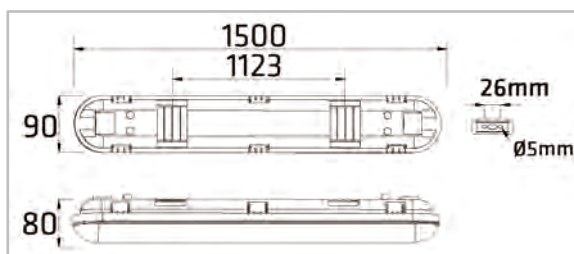

Dimmetype

Type	Ikke dimbar
------	-------------

Montering/Tilkobling

Montering	Utenpåliggende
Kobling	Hurtigklemme

Beskyttelse

Isolasjonsklasse	Klasse I
IP-grad (armaturhus)	IP66
IK-grad	IK09

Dimensjoner (mm)

Lengde (L)	1500 mm
Høyde (H)	80 mm
Bredde (W)	90 mm
Vekt	2,10 kgs

Materialer og overflater

Armaturhus	PC
Farge	Grå/Opal


Forpakning

Eske dimensjon	1515x130x95 mm
Eske Vekt	2,40 kgs
Kartong Dimensjon	1530x210x300 mm
Antall/Kartong	6 stk
Kartong Vekt	17,60 kgs

Energi og godkjenning

Energiklasse	A-A+
Godkjenning	CE
Safety standard	EN 60598-2-1:1989, EN 60598-1:2015

Dense NG_High Lumen

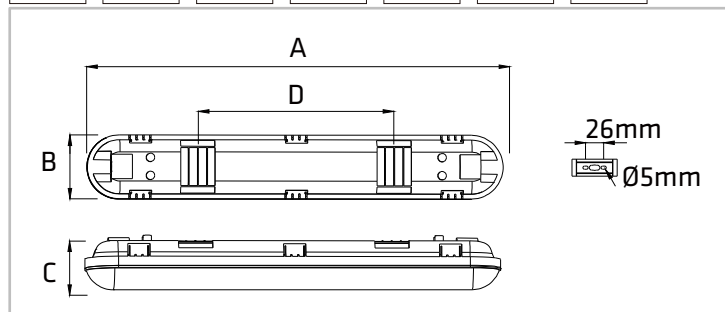

	A	B	C	D
20W	600mm	90mm	80mm	283mm
40W	1200mm	90mm	80mm	833mm
50W	1500mm	90mm	80mm	1123mm

IMPORTANT INFORMATION:




1. Please read this instruction carefully before installation and keep it for future reference.
2. Please conform to the instruction of equipment and installed by professional.
3. Make sure correct voltage applied before use and keep away from heat and vibration source.
4. The light source of this luminaire is not replaceable. When the light source reaches its end of life the whole luminaire shall be replaced.
5. The product is not suitable for any oil pollution ambient or related applications.
6. For indoor and outdoor use under shelter.

MAIN PARAMETER:

Product	352089	354089	355089
Rated Voltage	AC 200-240V 50/60Hz	AC 200-240V 50/60Hz	AC 200-240V 50/60Hz
LED watt	18W	36W	50W
System eff	20W	40W	50W
LED	Runlite SMD 2835 LED	Runlite SMD 2835 LED	Runlite SMD 2835 LED
LED Driver	Constant Current 500mA	Constant Current 1000mA	Constant Current 1250mA
Color Temperature	4000K	4000K	4000K
Protection	Class I	Class I	Class I
Beam Angle	120°	120°	120°
IP Rated	IP66	IP66	IP66
Operation Temperature	-40°C <ta<50°C	-40°C <ta<50°C	-40°C <ta<50°C
Product Size	600mmx90mmx80mm	1200mmx90mmx80mm	1500mmx90mmx80mm



INSTALLATION INSTRUCTIONS:

1. Always switch off the power supply before installation.
2. Make sure all parts are ready when open the box and prepare the installation tools the lighting needs.
3. Should be installed by qualified electricians.
4. If there is any damage on the housing or glass cover, should view it as disqualified product that cannot be used.
5. If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.



INSTALLATION STEPS:


1. Select the required position for the luminaire.

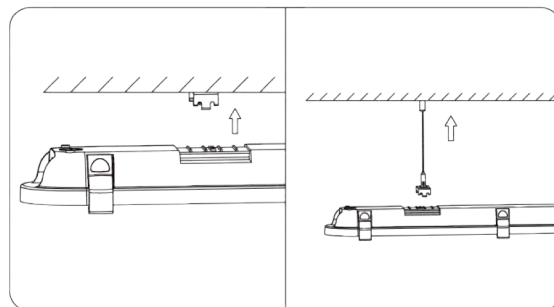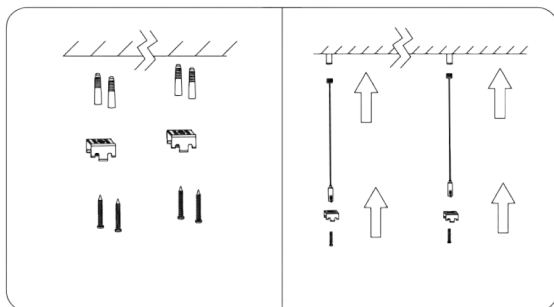

2. Connect power supply to the quick release terminal.

- Mains supply **LIVE (Brown) - L**
- Mains supply **NEUTRAL (Blue) - N**
- Mains supply **EARTH (Yellow/Green) - E**

IMPORTANT: The luminaire is Class I and must be earthed.

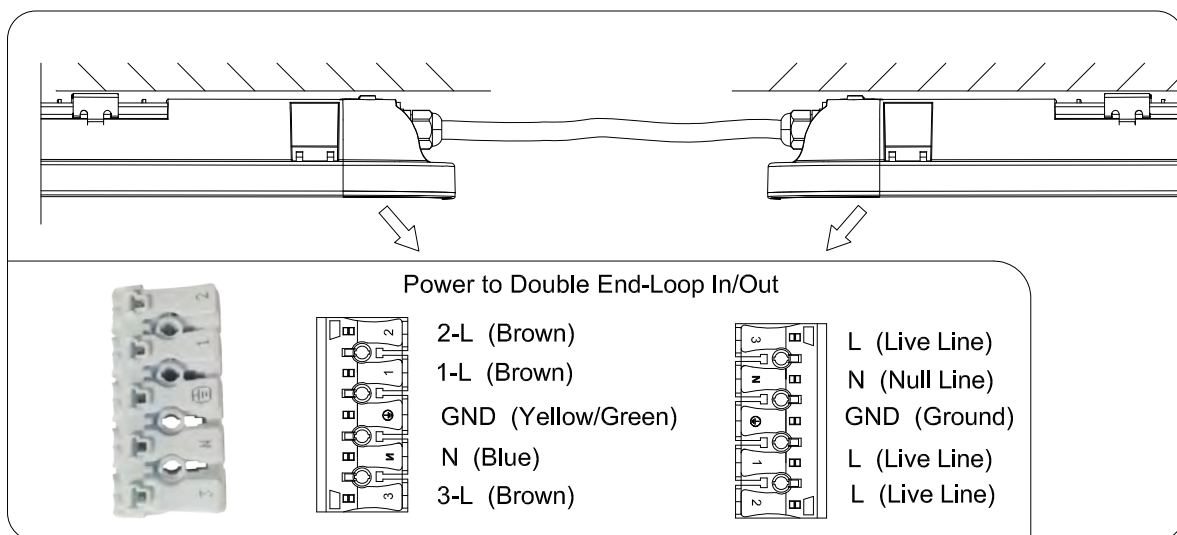

3. Switch on the power supply.

