

FDV


LED Panel SE Premium Innfelt 30x30

El nr	33 179 18
Article nr	121804
EAN	7090015375647



Lysteknikk

Type lyskilde	LED (Runlite SMD LED)
Spennning	230VAC 50/60Hz
Watt	16W
Systemeffekt (W)	18W
Effektiv lysstrøm (lm)	1800 lm
Effekt	100lm/W
Fargetemperatur	3000K
Fargegjengivelse (CRI)	Ra85
MacAdams faktor	SDCM<3
Levetid	70000 L80
Lysspredning	120°

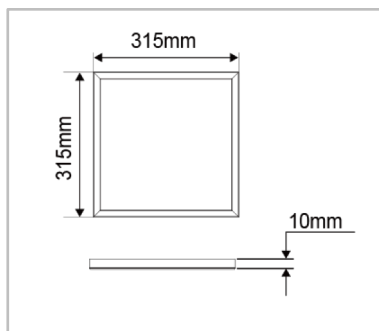

Dimmetype

Type	faseavsnitt
------	-------------

Beskyttelse

Isolasjonsklasse	Klasse II
IP-grad	IP40

Montering/Tilkobling

Montering	Innfelling
Kabling	1,5m ledning med Euro plugg

Materialer og overflater

Armaturhus	Metallramme og bakplate
Farge	Matt hvit (RAL 9003)
Optikk	PC
LGP	3mm (Mitsubishi)

Dimensjoner (mm)

Lengde (L)	315 mm
Bredde (W)	315 mm
Høyde (H)	10 mm
Vekt	1,40 kgs


Energi og godkjenning

Energiklasse	A-AA+
Godkjenning	CE
Safety standard (TUV)	EN 60598-1:2015, EN 60598-2-2:2012, EN 62471:2008, EN 62493:2015 AfPS GS 2014:01 Par. 3.1

Forpakning

Eske dimensjon	380x380x290 mm
Eske Vekt	1,70 kgs
Kartong Dimensjon	420x420x330 mm
Antall/Kartong	5 stk
Kartong Vekt	11,2 kgs

LED Panel SE Premium -High Lumen(Clip Type)

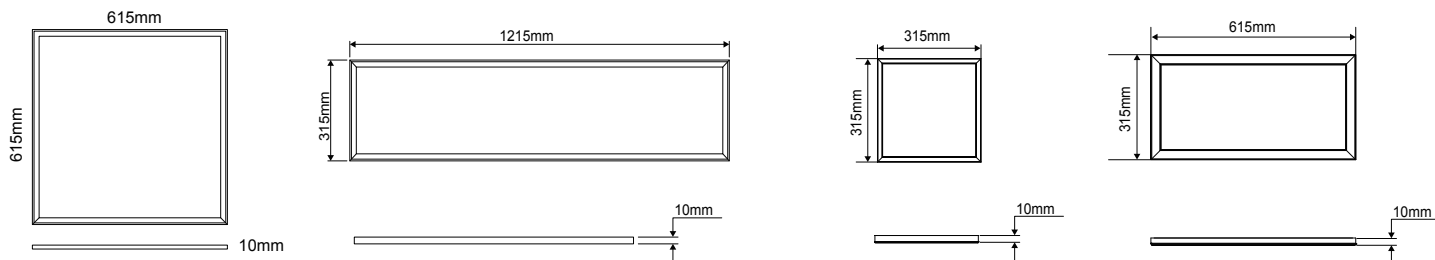

IMPORTANT INFORMATION:

1. Please read this instruction carefully before installation and keep it for future reference.
2. Please conform to the instruction of equipment and installed by professional.
3. Make sure correct voltage applied before use and keep away from heat and vibration source.
4. The light source of this luminaire is not replaceable. When the light source reaches its end of life the whole luminaire shall be replaced.
5. For indoor use only.

MAIN PARAMETER:

Product	113604	113624	121804	122704
Rated voltage	AC 180-240V 50/60Hz	AC 180-240V 50/60Hz	AC 180-240V 50/60Hz	AC 180-240V 50/60Hz
LED Rated power	36W	36W	16W	25W
System power	38W	38W	18W	27W
LED	SMD 2835	SMD 2835	SMD 2835	SMD 2835
LED Driver	Constant Current 950mA	Constant Current 950mA	Constant Current 420mA (Driver w/1,5m cable included)	Constant Current 700mA (Driver w/1,5m cable included)
Color Temperature	3000K	4000K	3000K	3000K
Protection	CLASS II	CLASS II	CLASS II	CLASS II
Beam Angle	120°	120°	120°	120°
Operation Temperature	-20°C~-40°C	-20°C~-40°C	-20°C~-40°C	-20°C~-40°C
Product size	615×615×10mm	1215×315×10mm	315×315×10mm	615×315×10mm
Weight	3.4kgs	3.6kgs	1.5kgs	3.0kgs



Please note:

Suitable LED Driver for 113604 and 113624 (Not included-purchase separately)

- 394800 LED Driver dimmebar 40W Max / Dimmable Trailing edge
- 394810 LED Driver ikke dimbar 40W Max / Non-dimmable
- 394820 LED Driver Dimmebar 40W Max 1-10V / Dimmable 1-10V
- 394830 LED Driver Dimmebar 40W Max DALI / 1-10V / Push Dim


INSTALLATION INSTRUCTIONS:

1. Always switch off the power supply before installation.
2. Make sure all parts are ready when open the box and prepare the installation tools the lighting needs.
3. Should be installed by qualified electricians.
4. If there is any damage on the housing or glass cover, should view it as disqualified product that cannot be used.

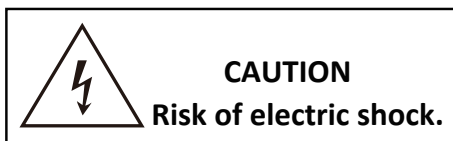


INSTALLATION STEPS:

1. Cut-out for the downlight.

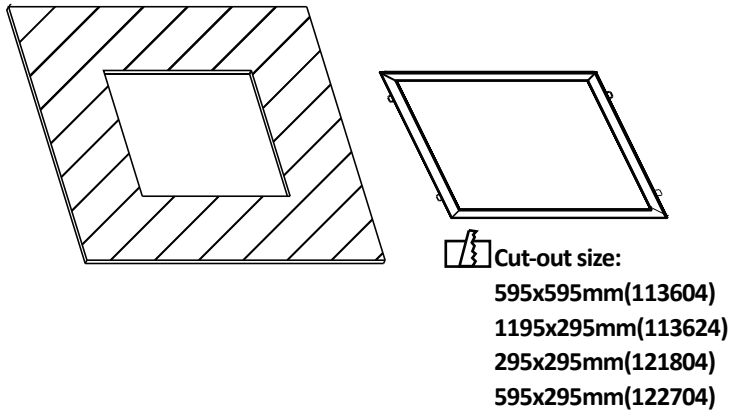

2. Select a suitable constant current driver and connect Mains supply to the driver.
Slide the mounting spring clips into the ceiling cut-out and push the luminaire up into cutting hole. Ensure that it is securely located.

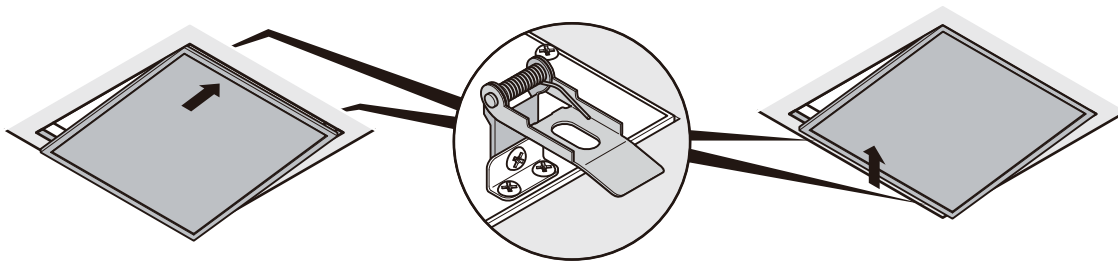

3. Switch on the power supply.

