



Meter enclosure, HxWxD=500x375x225mm, IP65

Part no.

Catalog No.

EL-Nummer
(Norway)

ZG/I45E-200


098479

2502364

Delivery program


Product range			Ci insulated enclosures
Basic function			Prepared enclosures
Product function			Meter enclosures
Accessories			Meter enclosures Meter rail
Single unit/Complete unit			Complete housing
Degree of Protection			IP65
Description			Metric cable entry knockouts in all sides Fixing straps for wall fixing Sealable cover fasteners
Information about equipment supplied			Meter rail to DIN 43853 including meter fixing screws and nuts
Type cover			Transparent
Width		mm	375
Height		mm	500
Depth		mm	225
Mounting depth:		mm	186

Enclosure depth

Legend for the graphic			Dimensions from top: Meter rail mounting depth Enclosure depth
Enclosure depth		mm	


Notes

D



1 x M50/32

E



1 x M50/32

2 x M40/25

8 x M25/16

2 x M20

Design verification as per IEC/EN 61439

Technical data for design verification			
Heat dissipation, at an ambient temperature of 35°C, delta T: 20 degrees in top of the enclosure, calculated as per IEC 60890			
Individual enclosure, free-standing	P _V	W	40
Starting enclosure, free-standing	P _V	W	38
Middle enclosure, free-standing	P _V	W	35
Individual enclosure for wall mounting	P _V	W	36


Starting enclosure for wall mounting	P _V	W	33
Middle enclosure for wall mounting	P _V	W	31
Heat dissipation, at an ambient temperature of 35°C, delta T: 35 degrees in top of the enclosure, calculated as per IEC 60890			
Individual enclosure, free-standing	P _V	W	81
Starting enclosure, free-standing	P _V	W	76
Middle enclosure, free-standing	P _V	W	71
Individual enclosure for wall mounting	P _V	W	72
Starting enclosure for wall mounting	P _V	W	67
Middle enclosure for wall mounting	P _V	W	62
IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures			Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat			Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects			Lower part: 960 °C / cover: 850 °C; meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation			Not relevant to indoor installations.
10.2.5 Lifting			30 kg per enclosure with support frame and lifting aid met; assembled and secured as per the latest applicable instruction leaflet.
10.2.6 Mechanical impact			IK10
10.2.7 Inscriptions			Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES			IP65
10.4 Clearances and creepage distances			Is the panel builder's responsibility.
10.5 Protection against electric shock			Protection class 2, therefore not applicable.
10.6 Incorporation of switching devices and components			Is the panel builder's responsibility.
10.7 Internal electrical circuits and connections			Is the panel builder's responsibility.
10.8 Connections for external conductors			Is the panel builder's responsibility.
10.9 Insulation properties			
10.9.2 Power-frequency electric strength			U _i = 1000 V AC
10.9.3 Impulse withstand voltage			8 kV
10.9.4 Testing of enclosures made of insulating material			Meets the product standard's requirements.
10.10 Temperature rise			The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating			Is the panel builder's responsibility.
10.12 Electromagnetic compatibility			Is the panel builder's responsibility.
10.13 Mechanical function			Meets the product standard's requirements.

Technical data ETIM 7.0

Distribution boards (EG000023) / Empty cabinet (EC000058)			
Electric engineering, automation, process control engineering / Electrical installation, device / Electrical distribution system (incl. small distribution board) / Empty cabinet (small distribution board) (ecl@ss10.0.1-27-14-24-08 [ACN385011])			
Mounting method			Surface mounted (plaster)
Type of cover			Optional
Cover model			Closed
Type of door			None
Transparent cover/door			Yes
With lock			No
Nominal current (In)		A	1600
Height		mm	500
Width		mm	375
Depth		mm	225
Built-in depth		mm	200
Internal depth		mm	200
Plate thickness cabinet		mm	6
Plate thickness door/cover		mm	6
Colour			Grey

RAL-number		7035
Number of modules		1
Number of rows		0
Width in number of modular spacings		17
Number of openings for flange plates		6
Extension possible		Yes
Number of conduit inlets		104
Material housing		Plastic
Surface protection		Other
With mounting plate		Yes
Suitable for outdoor use		Yes
Suitable for lightning protection		Yes
Degree of protection (IP)		IP65
Degree of protection (NEMA)		Other
Protection class		II
Impact strength		IK10
Circuit integrity		Other

Dimensions

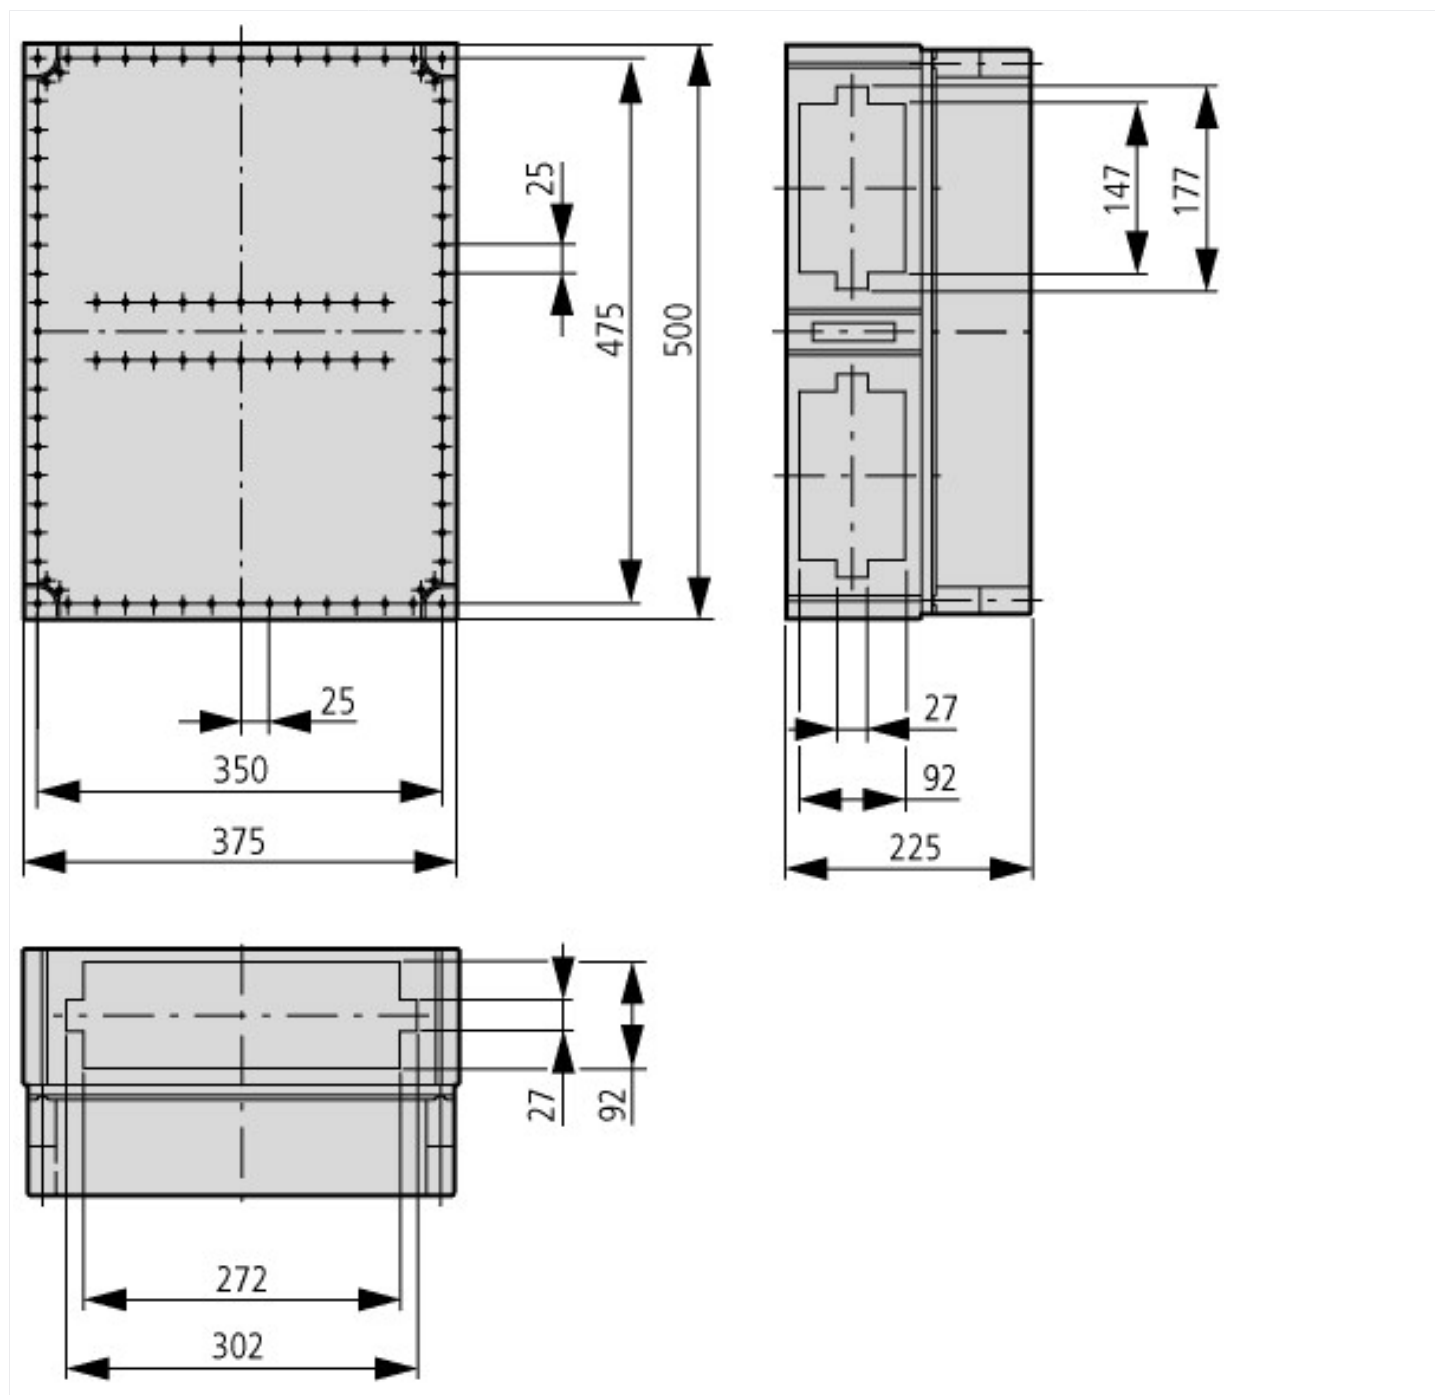

Additional product information (links)

allowInterrupt=1&RevisionSelectionMethod=LatestReleased&noSaveAs=0&Render=1&model%20certification%20xEnergy%20Safety%20Ci	http://www.eaton.eu/DE/ecm/idcplg?IdcService=GET_FILE&allowInterrupt=1&RevisionSelectionMethod=LatestReleased&noSaveAs=0&Render=1&model%20certification%20xEnergy%20Safety%20Ci
allowInterrupt=1&RevisionSelectionMethod=LatestReleased&noSaveAs=0&Render=1&Save%20time%20-%20we%20assist%20you%20with%20expert%20pre-assembly	http://www.eaton.eu/DE/ecm/idcplg?IdcService=GET_FILE&allowInterrupt=1&RevisionSelectionMethod=LatestReleased&noSaveAs=0&Render=1&Save%20time%20-%20we%20assist%20you%20with%20expert%20pre-assembly
allowInterrupt=1&RevisionSelectionMethod=LatestReleased&noSaveAs=0&Render=1&product%20information%20xEnergy%20Safety%20Ci	http://www.eaton.eu/DE/ecm/idcplg?IdcService=GET_FILE&allowInterrupt=1&RevisionSelectionMethod=LatestReleased&noSaveAs=0&Render=1&product%20information%20xEnergy%20Safety%20Ci
tool for calculating the power loss for switching device combinations	http://www.eaton.eu/DE/Europe/Electrical/CustomerSupport/ConfigurationTools/TCTool/index.htm
configurator - xEnergy family	http://www.eaton.eu/DE/Europe/Electrical/CustomerSupport/ConfigurationTools/xEnergyMainSupport/index.htm