



Data subject to change without notice. Always confirm the data is correct from the seller.

KEA 316U/EMC

EMC Switches 10-630A

- Electromagnetic compatibility ensures safe operation in environments with electromagnetic disturbance
- Tested according to EMC EN 61000-6-3:2007+A1(2011) with EMC- glands

shielded power cable

- IP66; Enclosure types U2, U3, A2, A3
- IP65; Enclosure types TR02, TR03, TR04
- Available in polycarbonate up to 125 A, aluminium up to 160 A and sheet steel up to 630 A
- Also available in TR02, TR03 and TR04 enclosures
- Padlockable
- EMC cable glands included
- Door interlock with defeat mechanism
- Tested according to IEC 60947-3
- Also available with 4, 6 or 8-poles
- **Note!** Al-cables cannot be connected directly to switch terminals. For Al-cable connection please use a bi-metal cable connector, **available here**.

Technical datasheet >>

Accessories




PRODUCT CARD

MORE INFORMATION

PRODUCT DETAILS

SKU	KEA 316U/EMC
AC-21 400/415 V (A)	25 A
AC-21 690 V (A)	25 A
AC-22 400/415 V (A)	16 A
AC-22 690 V (A)	16 A
AC-23 400/415 V (A/kW)	16 A / 7.5 kW
AC-23 690 V (A/kW)	16 A / 11 kW
Cable Area to Switch Terminal (mm2) / Bolt size	1.5-16
Cable Gland	2xM25
Color	Standard
EAN	6419410483008
Enclosure	A2
Enclosure Type	Aluminium
IP Rating	66
Number of Poles	3
Operation	Front-operated
Switch type	Load Break Switch
Weight (kg)	0.8

DIMENSIONAL DRAWING

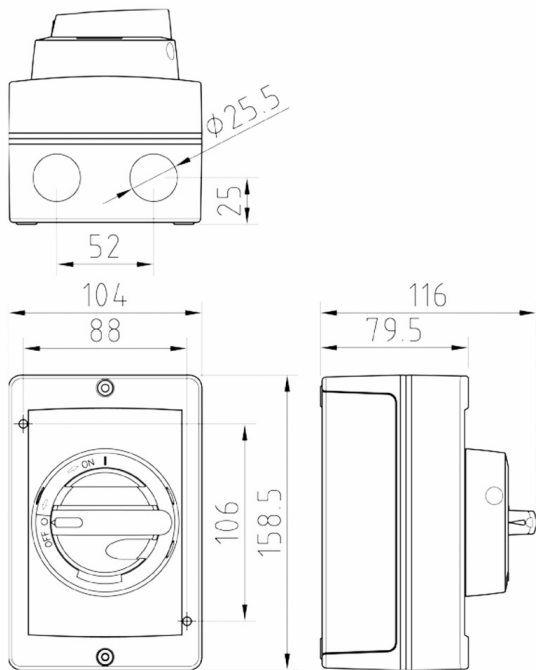

KATKO Oy
Ruosilantie 2
00390 Helsinki, Finland
E-mail: [info\(at\)katko.com](mailto:info(at)katko.com)
Tel: +358 (0)9 849 600

NEWSLETTER

Email

SEND »

[LinkedIn](#) | [YouTube](#)

DOWNLOADS →

[Terms & Conditions](#)