



Data subject to change without notice. Always confirm the data is correct from the seller.

## **KEA 3160U**

---

### **KEA Aluminium 16-250A**

- IP66; Enclosure types A2, A3
- IP65; Enclosure types A4, A5
- IK08; A2, A3 (Degree of mechanical impact)
- IK10: A4, A5

- Excellent for hard weather conditions
- Wide operating temperature range
- Good resistance against many chemicals
- Good UV resistance
- Padlockable
- Door interlock with defeat mechanism
- Tested according to IEC 60947-3
- **Note!** Al-cables cannot be connected directly to switch terminals. For Al-cable connection please use a bi-metal cable connector, **available here**.

Technical datasheet >>

Accessories



PRODUCT CARD


MORE INFORMATION

PRODUCT DETAILS

|                     |           |
|---------------------|-----------|
| SKU                 | KEA 3160U |
| AC-21 400/415 V (A) | 160 A     |
| AC-21 690 V (A)     | 160 A     |

|                                                 |                   |
|-------------------------------------------------|-------------------|
| AC-22 400/415 V (A)                             | 160 A             |
| AC-22 690 V (A)                                 | 160 A             |
| AC-23 400/415 V (A/kW)                          | 160 A / 90 kW     |
| AC-23 690 V (A/kW)                              | 100 A / 90 kW     |
| Cable Area to Switch Terminal (mm2) / Bolt size | 6-70              |
| Color                                           | Standard          |
| EAN                                             | 6419410329665     |
| Enclosure                                       | A3                |
| Enclosure Type                                  | Aluminium         |
| IP Rating                                       | 66                |
| Number of Poles                                 | 3                 |
| Operation                                       | Front-operated    |
| Switch type                                     | Load Break Switch |
| Weight (kg)                                     | 3.5               |

## DIMENSIONAL DRAWING

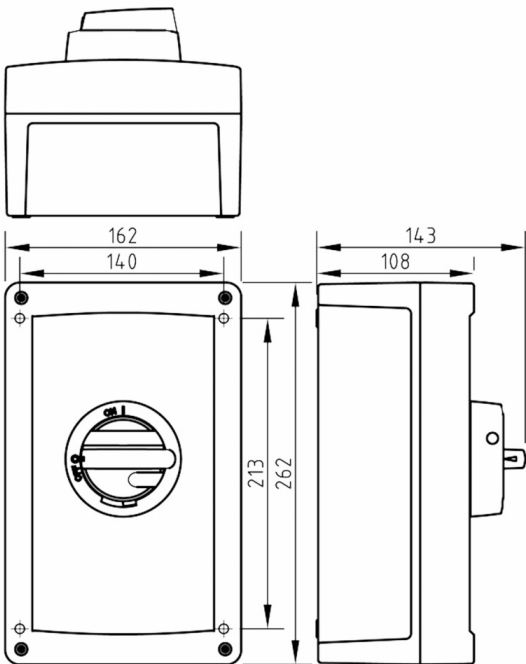



KATKO Oy  
Ruosilantie 2  
00390 Helsinki, Finland  
E-mail: [info\(at\)katko.com](mailto:info(at)katko.com)  
Tel: +358 (0)9 849 600

# NEWSLETTER

---

**SEND »**

[LinkedIn](#) | [YouTube](#)

**DOWNLOADS** →

[Terms & Conditions](#)