



Data subject to change without notice. Always confirm the data is correct from the seller.

KEM 425U

KEM Polycarbonate 10-630A

- IP66; Enclosure types U2, U3, U4
- IP65; Enclosure types MF11, MF03, MF04
- Self-extinguishing material
- Wide operating temperature range
- Padlockable with 3 locks

- Door interlock with defeat mechanism
- Excellent insulating properties
- Good UV resistance
- Good resistance against many chemicals
- Tested according to IEC 60947-3
- **Note!** Al-cables cannot be connected directly to switch terminals. For Al-cable connection please use a bi-metal cable connector, **available here**.

KEM 16-40 A Installation guide video >>

KEM 63-80 A Installation guide video >>

Technical datasheet >>

Accessories




PRODUCT CARD


MORE INFORMATION

PRODUCT DETAILS

SKU	KEM 425U
AC-21 400/415 V (A)	40 A
AC-21 690 V (A)	40 A

AC-22 400/415 V (A)	25 A
AC-22 690 V (A)	25 A
AC-23 400/415 V (A/kW)	25 A / 11 kW
AC-23 690 V (A/kW)	25 A / 22 kW
Cable Area to Switch Terminal (mm2) / Bolt size	1.5-16
Color	Standard
EAN	6419410327692
Enclosure	U2
Enclosure Type	Polycarbonate
IP Rating	66
Number of Poles	4
Operation	Front-operated
Switch type	Load Break Switch
Weight (kg)	0.5

DIMENSIONAL DRAWING

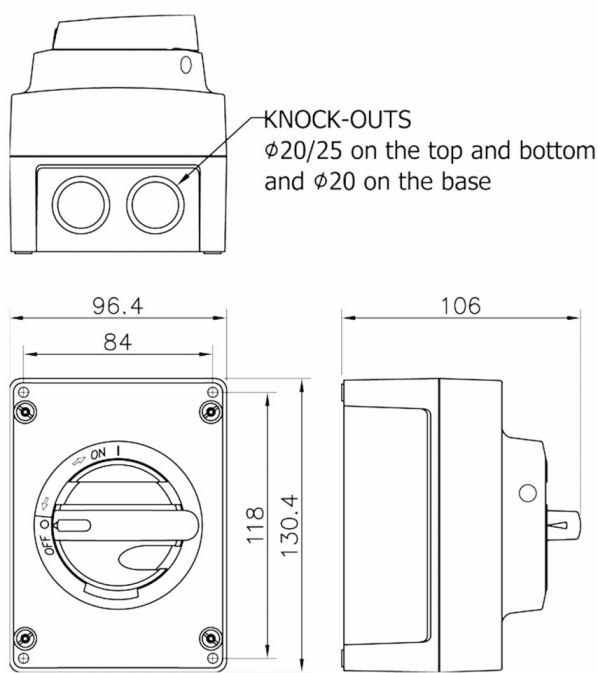



KATKO Oy
Ruosilantie 2
00390 Helsinki, Finland
E-mail: [info\(at\)katko.com](mailto:info(at)katko.com)
Tel: +358 (0)9 849 600

NEWSLETTER

SEND »

[LinkedIn](#) | [YouTube](#)

DOWNLOADS →

[Terms & Conditions](#)