



Data subject to change without notice. Always confirm the data is correct from the seller.

KET 3125

KET Sheet Steel 16-1600A

- IP65
- Good corrosion resistance
- Wide operating temperature range
- Padlockable
- Door interlock with defeat mechanism

- Excellent insulating properties
- Good UV resistance
- Good resistance against many chemicals
- Tested according to IEC 60947-3
- **Note!** Al-cables cannot be connected directly to switch terminals. For Al-cable connection please use a bi-metal cable connector, **available here**.

Technical datasheet >>

Accessories



PRODUCT CARD


MORE INFORMATION

PRODUCT DETAILS

SKU	KET 3125
AC-21 400/415 V (A)	160 A
AC-21 690 V (A)	160 A
AC-22 400/415 V (A)	125 A

AC-22 690 V (A)	125 A
AC-23 400/415 V (A/kW)	125 A / 55 kW
AC-23 690 V (A/kW)	80 A / 75 kW
Cable Area to Switch Terminal (mm2) / Bolt size	6-70
Color	Standard
EAN	6419410339251
Enclosure	TR01
Enclosure Type	Sheet Steel
IP Rating	65
Number of Poles	3
Operation	Front-operated
Switch type	Load Break Switch
Weight (kg)	4.3

DIMENSIONAL DRAWING

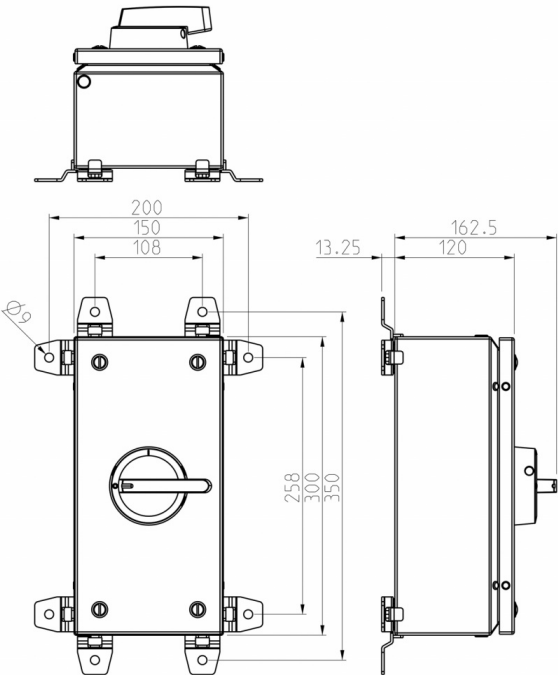



KATKO Oy
Ruosilantie 2
00390 Helsinki, Finland
E-mail: [info\(at\)katko.com](mailto:info(at)katko.com)
Tel: +358 (0)9 849 600

NEWSLETTER

Email

SEND »

[LinkedIn](#) | [YouTube](#)

DOWNLOADS →

[Terms & Conditions](#)