



Note: Product images do not represent this product. Actual product may differ from shown images.

Data subject to change without notice. Always confirm the data is correct from the seller.

KET 316

KET Sheet Steel 16-1600A

- IP65
- Good corrosion resistance
- Wide operating temperature range

- Padlockable
- Door interlock with defeat mechanism
- Excellent insulating properties
- Good UV resistance
- Good resistance against many chemicals
- Tested according to IEC 60947-3
- **Note!** Al-cables cannot be connected directly to switch terminals. For Al-cable connection please use a bi-metal cable connector, **available here**.

Technical datasheet >>

Accessories



PRODUCT CARD


MORE INFORMATION

PRODUCT DETAILS

SKU	KET 316
AC-21 400/415 V (A)	25 A
AC-21 690 V (A)	25 A

AC-22 400/415 V (A)	16 A
AC-22 690 V (A)	16 A
AC-23 400/415 V (A/kW)	16 A / 7.5 kW
AC-23 690 V (A/kW)	16 A / 11 kW
Cable Area to Switch Terminal (mm2) / Bolt size	1.5-16
Color	Standard
EAN	6419410339800
Enclosure	TR007
Enclosure Type	Sheet Steel
IP Rating	65
Number of Poles	3
Operation	Front-operated
Switch type	Load Break Switch
Weight (kg)	2.1

DIMENSIONAL DRAWING

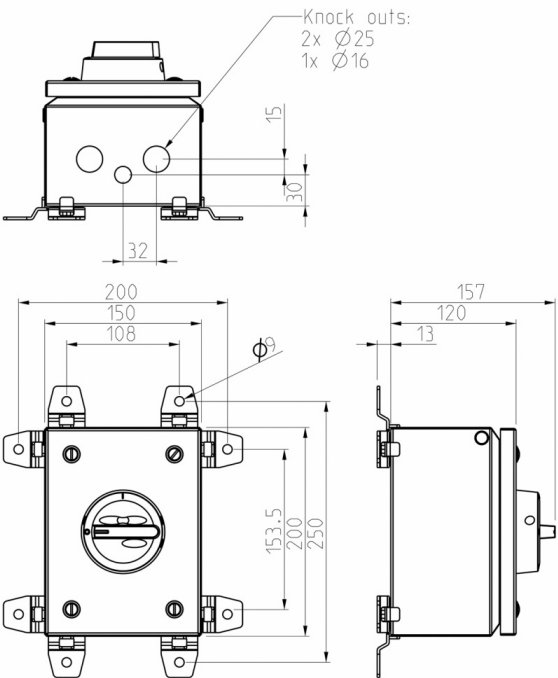



KATKO Oy
Ruosilantie 2
00390 Helsinki, Finland
E-mail: [info\(at\)katko.com](mailto:info(at)katko.com)
Tel: +358 (0)9 849 600

NEWSLETTER

SEND »

[LinkedIn](#) | [YouTube](#)

DOWNLOADS →

[Terms & Conditions](#)