



**Note:** Product images do not represent this product. Actual product may differ from shown images.

Data subject to change without notice. Always confirm the data is correct from the seller.

## KER 3250

---

### KER Stainless Steel 16-1600A

- IP66; Enclosure types H23, H32, H02 (AISI 316, acid proof)
- IP65; Enclosure types H03, H04, H06, H07,

H08 (AISI 304 as standard, AISI 316 upon request)

- Where hygiene and good protection against corrosion are required
- Padlockable with three locks
- Door interlock with defeat mechanism
- Tested according to IEC 60947-3
- Also available as EMC, and EMC/EX - protected
- **Note!** Al-cables cannot be connected directly to switch terminals. For Al-cable connection please use a bi-metal cable connector, **available here**.

Technical datasheet >>

Accessories



PRODUCT CARD


MORE INFORMATION

PRODUCT DETAILS

|                     |          |
|---------------------|----------|
| SKU                 | KER 3250 |
| AC-21 400/415 V (A) | 250 A    |
| AC-21 690 V (A)     | 250 A    |

|                                                       |                                             |
|-------------------------------------------------------|---------------------------------------------|
| AC-22 400/415 V (A)                                   | 250 A                                       |
| AC-22 690 V (A)                                       | 250 A                                       |
| AC-23 400/415 V (A/kW)                                | 250 A / 132 kW                              |
| AC-23 690 V (A/kW)                                    | 250 A / 250 kW                              |
| Cable Area to Switch<br>Terminal (mm2) / Bolt<br>size | M10                                         |
| Color                                                 | Standard                                    |
| EAN                                                   | 6419410343784                               |
| Enclosure                                             | H03                                         |
| Enclosure Type                                        | Stainless Steel:<br>Polycarbonate<br>Handle |
| IP Rating                                             | 65                                          |
| Number of Poles                                       | 3                                           |
| Operation                                             | Front-operated                              |
| Switch type                                           | Load Break Switch                           |
| Weight (kg)                                           | 15                                          |

## DIMENSIONAL DRAWING

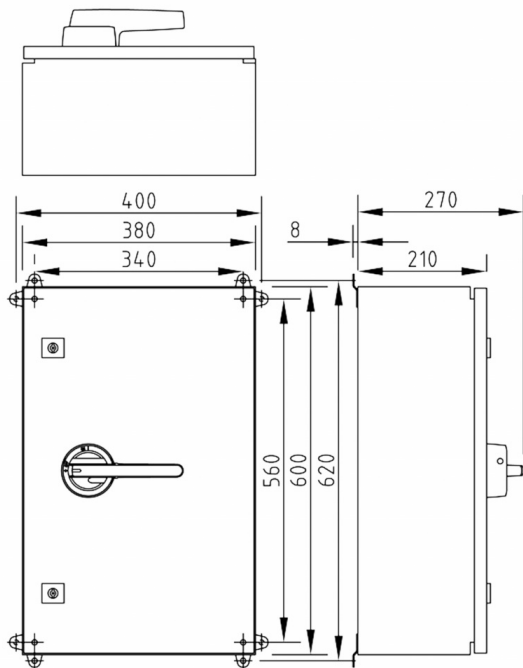

KATKO Oy  
Ruosilantie 2  
00390 Helsinki, Finland  
E-mail: [info\(at\)katko.com](mailto:info(at)katko.com)  
Tel: +358 (0)9 849 600

## NEWSLETTER

Email

SEND »

[LinkedIn](#) | [YouTube](#)

DOWNLOADS →

[Terms & Conditions](#)