



Data subject to change without notice. Always confirm the data is correct from the seller.

KER 325RS

KER RS/R Stainless steel 16-160A

- IP66
- AISI 316, acid proof
- Designed for hygienic and heavy environments
- Easy to install and to keep clean

- Rainhood protection with angled top in RS-models
- Padlockable stainless steel handle LKR1
- Tested according to IEC 60947-3
- **Note!** Al-cables cannot be connected directly to switch terminals. For Al-cable connection please use a bi-metal cable connector, **available here**.

Technical datasheet >>

Accessories



PRODUCT CARD


MORE INFORMATION

PRODUCT DETAILS

SKU	KER 325RS
AC-21 400/415 V (A)	40 A
AC-21 690 V (A)	40 A
AC-22 400/415 V (A)	25 A

AC-22 690 V (A)	25 A
AC-23 400/415 V (A/kW)	25 A / 11 kW
AC-23 690 V (A/kW)	25 A / 22 kW
Cable Area to Switch Terminal (mm2) / Bolt size	1.5-16
Color	Standard
EAN	6419410306628
Enclosure	H24T
Enclosure Type	Stainless Steel Angled Roof: Stainless Steel Handle
IP Rating	66
Number of Poles	3
Operation	Front-operated
Switch type	Load Break Switch
Weight (kg)	1.7

DIMENSIONAL DRAWING

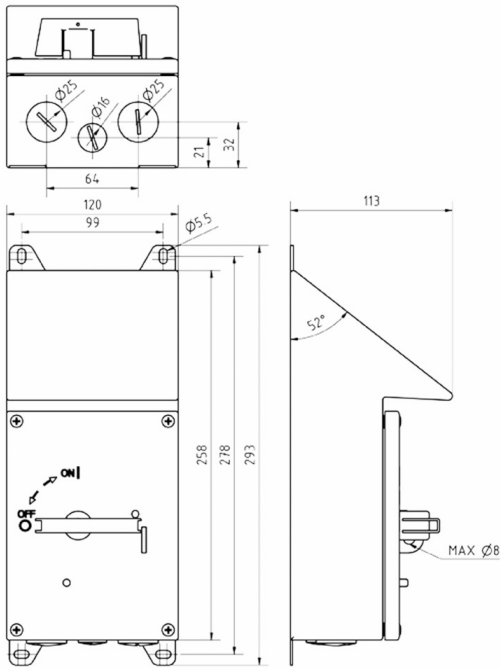

KATKO Oy
Ruosilantie 2
00390 Helsinki, Finland
E-mail: [info\(at\)katko.com](mailto:info(at)katko.com)
Tel: +358 (0)9 849 600

NEWSLETTER

Email

SEND »

[LinkedIn](#) | [YouTube](#)

DOWNLOADS →

[Terms & Conditions](#)