



Note: Product images do not represent this product. Actual product may differ from shown images.

Data subject to change without notice. Always confirm the data is correct from the seller.

KER 363RS

KER RS/R Stainless steel 16-160A

- IP66
- AISI 316, acid proof
- Designed for hygienic and heavy

- environments
- Easy to install and to keep clean
 - Rainhood protection with angled top in RS-models
 - Padlockable stainless steel handle LKR1
 - Tested according to IEC 60947-3
 - **Note!** Al-cables cannot be connected directly to switch terminals. For Al-cable connection please use a bi-metal cable connector, **available here**.

Technical datasheet >>

Accessories




PRODUCT CARD




MORE INFORMATION

PRODUCT DETAILS

SKU	KER 363RS
AC-21 400/415 V (A)	80 A
AC-21 690 V (A)	80 A

AC-22 400/415 V (A)	63 A
AC-22 690 V (A)	63 A
AC-23 400/415 V (A/kW)	40 A / 22 kW
AC-23 690 V (A/kW)	40 A / 37 kW
Cable Area to Switch Terminal (mm2) / Bolt size	2.5-35
Color	Standard
EAN	6419410307052
Enclosure	H34T
Enclosure Type	Stainless Steel Angled Roof: Stainless Steel Handle
IP Rating	66
Number of Poles	3
Operation	Front-operated
Switch type	Load Break Switch
Weight (kg)	2.9

DIMENSIONAL DRAWING

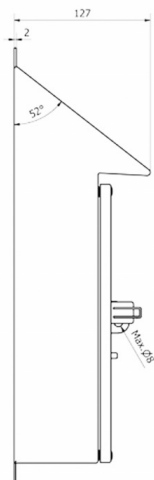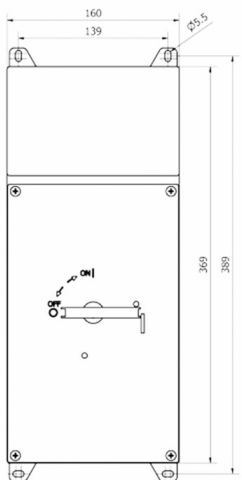

KATKO Oy
Ruosilantie 2
00390 Helsinki, Finland
E-mail: [info\(at\)katko.com](mailto:info(at)katko.com)
Tel: +358 (0)9 849 600

NEWSLETTER

Email

SEND »

[LinkedIn](#) | [YouTube](#)

DOWNLOADS →

[Terms & Conditions](#)