



Data subject to change without notice. Always confirm the data is correct from the seller.

KER 316 IP69K

KER IP69K Stainless steel 16-125A

- IP69K rating
- LK11 handle (Black or yellow/red)
- Where hygiene and good protection against corrosion are required
- Padlockable

- Door interlock with defeat mechanism
- S-model with sloped roof
- **Note!** Al-cables cannot be connected directly to switch terminals. For Al-cable connection please use a bi-metal cable connector, **available here**.

Technical datasheet >>

Accessories



PRODUCT CARD


MORE INFORMATION

PRODUCT DETAILS

SKU	KER 316 IP69K
AC-22 400/415 V (A)	16 A
AC-22 690 V (A)	16 A
AC-23 400/415 V (A/kW)	16 A / 7.5 kW
AC-23 690 V (A/kW)	16 A / 11 kW

Cable Area to Switch Terminal (mm2) / Bolt size	1.5-16
Color	Standard
EAN	6419410325919
Enclosure	H23
Enclosure Type	Stainless Steel: Polycarbonate Handle
IP Rating	69K
Number of Poles	3
Operation	Front-operated
Switch type	Load Break Switch
Weight (kg)	1.2

DIMENSIONAL DRAWING

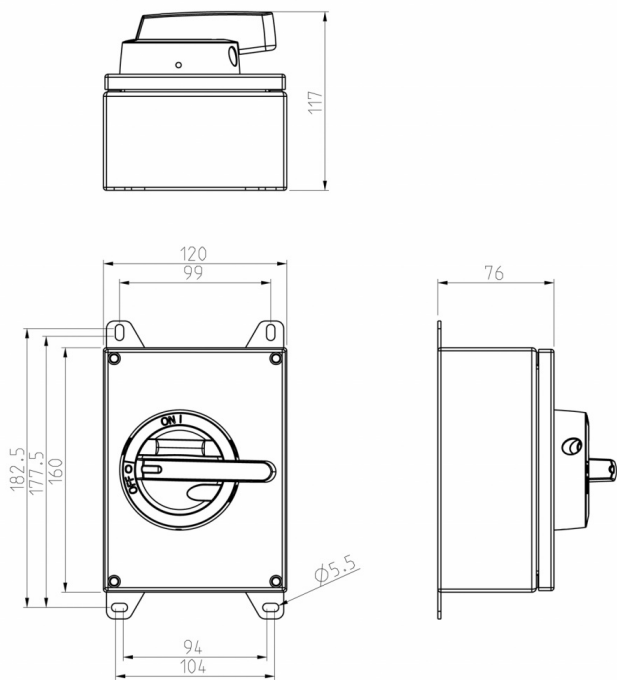



KATKO Oy
Ruosilantie 2
00390 Helsinki, Finland
E-mail: [info\(at\)katko.com](mailto:info(at)katko.com)
Tel: +358 (0)9 849 600

NEWSLETTER

SEND »

[LinkedIn](#) | [YouTube](#)

DOWNLOADS →

[Terms & Conditions](#)