

# HF 360-2

# Our specialist for special situations.

The proven presence detector with a new design: now available with temperature and humidity measuring. Ideal for use in stairwells, WCs and side rooms. Bluetooth takes the effort out of setting them up, putting them into operation and interconnecting them.





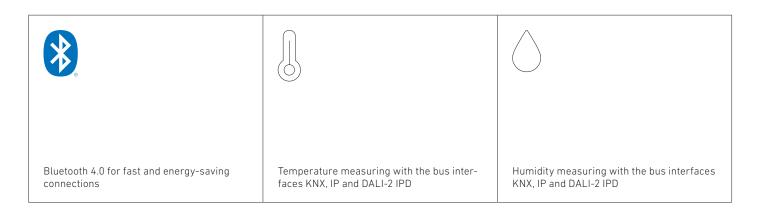







sensor





Reach Ø 12 m max. and through glass and lightweight construction stud walls



Mounting height 4 m max.



Electronic sensitivity setting



Interfaces



UV protected material









## The latest presence detectors of the next generation



True Presence®



Hallway



True Presence® Multisensor



IR Quattro HD-2

### HF 360-2 technical specifications

Mounting height max	2.50-4.	00 m
Reach radial and tangential	Ø	12 m

#### Ordering details (concealed installation)

3		
COM1	4007841 0	64433
COM2	4007841 0	64242
DALI-2 APC	4007841 0	64266
DALI-2 IPD	4007841 0	64280
KNX V3.1	4007841 0	64303
IP	4007841 0	65973
BT IPD (Slave)	4007841 0	64419

#### Ordering details (surface installation)

COM1	4007841	064440
COM2	4007841	064259
DALI-2 APC	4007841	064273
DALI-2 IPD	4007841	064297
KNX V3.1	4007841	064860
IP	4007841	065966
BT IPD (Slave)	4007841	064426

