

Hallway

DALI-2 Input Device - concealed

EAN 4007841 064532

Article number 064532



max. 25 x 3 m



IP20



brightness



temperature



air humidity



2 - 4 m



Input Device

5 years



manufacturer's
warranty
steinel-professional.de/garantie

Function description

The cleverer hallway sensor knows more. Perfect radial detection up to 25 m – ideal for long corridors and hallways. Reach can be adjusted in both directions. Contemporary Control PRO II design. Featuring Bluetooth technology. Interfaces for COM1, COM2, DALI-2 APC, DALI-2 IPD, KNX, IP and BT IPD (Slave).

Technical specifications

Type	Presence detector
Dimensions (L x W x H)	67 x 103 x 103 mm
Mains power supply	12 – 23 V
Power supply, detail	DALI bus
Sensor Technology	High frequency
Application, place	Indoors
Installation site	ceiling
Installation	Concealed wiring
Mounting height	2,00 – 4,00 m
Reach, radial	25 x 3 m (75 m ²)
Reach, tangential	25 x 3 m (75 m ²)
HF-system	5,8 GHz
Detection angle	360 °
Angle of aperture	140 °
Optimum mounting height	2,8 m
Mechanical scalability	No
Sneak-by guard	Yes
Capability of masking out individual segments	No
Electronic scalability	Yes

Detection	also through glass, wood and stud walls
Twilight setting TEACH	No
Control output, Dali	Addressable/slave
Constant-lighting control	No
Basic light level function	No
Settings via	Bluetooth, Bus
With remote control	No
Interconnection	Yes
Type of interconnection	Master/slave
IP-rating	IP20
Material	Plastic
Ambient temperature	-20 – 50 °C
Application, room	Indoors, corridor / aisle
Colour	white
Colour, RAL	9003
Manufacturer's Warranty	5 years
Version	DALI-2 Input Device - concealed
PU1, EAN	4007841064532


Hallway

DALI-2 Input Device - concealed

EAN 4007841 064532

Article number 064532


Detection Zone



Mögliche Montagehöhe: 2,00 m – 4,00 m

Orange: radial und tangential

Dimension Drawing

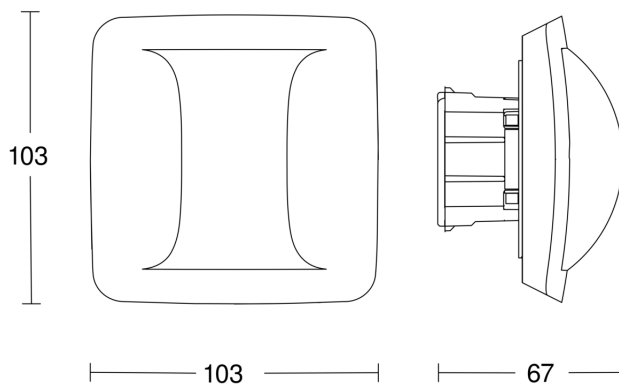

Circuit diagram

