



127733

N2-4-200-S1-DC

[Overview](#)[Specifications](#)[Resources](#)

DELIVERY PROGRAM

[Delivery program](#)

Product range
Switch-disconnectors

[Technical data](#)

Protective function
Disconnectors/main switches
Photovoltaic applications

[Technical data ETIM7.0](#)

Product range
DC switch-disconnectors

[Dimensions](#)

Application field
Utility buildings
Open areas

Part no.
N..DC

Standard/Approval
IEC


Rated operational voltage

Installation type
Fixed

Construction size
N2

Description
IEC/EN 60947-3
OCC China Compulsory Certificate
Main switch characteristics including positive drive
to IEC/EN 60204 and VDE 0113.
Isolating characteristics to IEC/EN 60947-3 and
VDE 0660.
N switch-disconnectors can, in addition, be
combined with NZM..-XU, NZM..-XA shunt
releases and auxiliary contacts as well as with
NZM..-XR... remote operator.
For DC switching, all 4 contacts must be
connected in series. Refer to the information on
jumper kit accessories.
Supplied as standard: Screw connection; box
terminal optional.
When working with ungrounded systems (e.g., IT),
the installation must ensure that a double ground
fault will be impossible.
Switch can not be combined with plug-
in/withdrawable units and/or connection on rear.
N4-4...-S15-DC feeder unit and outgoer from the
bottom only.

Connection options

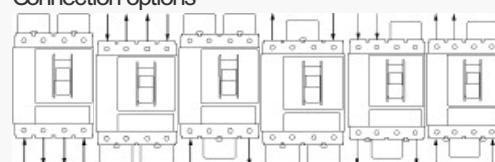

Number of poles
4-pole basic device, usable in a 1-pole or 2-pole
configuration depending on the type of connection

Standard equipment
Screw connection

Switch positions
I, +, 0

Rated current = rated uninterrupted current [$I_h = I_u$]
200 A

Short-circuit protective device max. fuse gR-characteristic
200 A gR

Remotely control / trip
Remote operation with shunt releases / remote operator

Rated operating frequency
DC

TECHNICAL DATA

Switch-disconnectors

Rated operational voltage, max. [Ue]
1000 V DC

Rated uninterrupted current with terminal jumpers
at 40°
200

Rated uninterrupted current with terminal jumpers
at 65°
200

Rated uninterrupted current with terminal jumpers
Values for rated uninterrupted current at 65 °C
include jumpers.

Utilization category
DC-22A

Rated operational current [Ie]
DC 22-A [Ie]
200 A

Overvoltage category/pollution degree
III/3

Rated insulation voltage [Ui]
1250 V

Ambient temperature
Ambient temperature, storage
- 40 - + 70 °C

Ambient temperature
Operation
-25 - +70 °C

Rated short-time withstand current

$t = 1 \text{ s } [I_{cw}]$
3.6 kA

Rated conditional short-circuit current [kA]

1000 V
15 kA

With back-up fuse
200 A gR

Lifespan, mechanical

Max. operating frequency
120 Ops/h

Lifespan, mechanical [Operations]
20000

Lifespan, mechanical: of which max. 50 % trip by
shunt/undervoltage release

Terminal capacity

Standard equipment
Screw connection

Round copper conductor
Box terminal
Solid
1 x (4 - 16)
2 x (4 - 16) mm²

Round copper conductor
Box terminal
Stranded
1 x (25 - 185)
2 x (25 - 70) mm²

Round copper conductor
Tunnel terminal
Solid
1 x 16 mm²

Round copper conductor
Tunnel terminal
Stranded
Stranded
1 x (25 - 185) mm²

Round copper conductor
Bolt terminals
Direct on the switch
Solid
1 x (10 - 16)
2 x (4 - 16) mm²

Round copper conductor
Bolt terminals
Direct on the switch
Stranded
1 x (25 - 185)
2 x (25 - 70) mm²

Al conductors, Cu cable
Tunnel terminal
Solid
1 x 16 mm²

Al conductors, Cu cable
Tunnel terminal
Stranded
Stranded
1 x (25 - 185) mm²

Al conductors, Cu cable
Bolt terminal and rear-side connection
Flat copper strip, with holes [min.]
2 x 16 x 0.8 mm

Al conductors, Cu cable
Bolt terminal and rear-side connection
Flat copper strip, with holes [max.]
10 x 24 x 0.8 mm

Cu strip (number of segments x width x segment thickness)
Box terminal [min.]
2 x 9 x 0,8 mm

Cu strip (number of segments x width x segment thickness)
Box terminal [max.]
10 x 16 x 0,8
(2x) 8 x 15,5 x 0,8 mm

Cu strip (number of segments x width x segment thickness)
Bolt terminal and rear-side connection
Flat copper strip, with holes [min.]
2 x 16 x 0.8 mm

Cu strip (number of segments x width x segment thickness)
Bolt terminal and rear-side connection
Flat copper strip, with holes [max.]
10 x 24 x 0.8 mm

Copper busbar (width x thickness) [mm]
Bolt terminal and rear-side connection
Screw connection
M8

Copper busbar (width x thickness) [mm]
Bolt terminal and rear-side connection
Direct on the switch [min.]
16 x 5 mm

Copper busbar (width x thickness) [mm]
Bolt terminal and rear-side connection
Direct on the switch [max.]
24 x 8 mm

DESIGN VERIFICATION AS PER IEC/EN 61439

Technical data for design verification

Rated operational current for specified heat dissipation [I_h]
200 A

Equipment heat dissipation, current-dependent

[P_{id}]

42 W

Operating ambient temperature min.

-25 °C

Operating ambient temperature max.

+70 °C

IEC/EN 61439 design verification

10.2 Strength of materials and parts

10.2.2 Corrosion resistance

Meets the product standard's requirements.

10.2 Strength of materials and parts

10.2.3.1 Verification of thermal stability of enclosures

Meets the product standard's requirements.

10.2 Strength of materials and parts

10.2.3.2 Verification of resistance of insulating materials to normal heat

Meets the product standard's requirements.

10.2 Strength of materials and parts

10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects

Meets the product standard's requirements.

10.2 Strength of materials and parts

10.2.4 Resistance to ultra-violet (UV) radiation

Meets the product standard's requirements.

10.2 Strength of materials and parts

10.2.5 Lifting

Does not apply, since the entire switchgear needs to be evaluated.

10.2 Strength of materials and parts

10.2.6 Mechanical impact

Does not apply, since the entire switchgear needs to be evaluated.

10.2 Strength of materials and parts

10.2.7 Inscriptions

Meets the product standard's requirements.

10.3 Degree of protection of ASSEMBLIES

Does not apply, since the entire switchgear needs to be evaluated.

10.4 Clearances and creepage distances

Meets the product standard's requirements.

10.5 Protection against electric shock

Does not apply, since the entire switchgear needs to be evaluated.

10.6 Incorporation of switching devices and components

Does not apply, since the entire switchgear needs to be evaluated.

10.7 Internal electrical circuits and connections

Is the panel builder's responsibility.

10.8 Connections for external conductors

Is the panel builder's responsibility.

10.9 Insulation properties

10.9.2 Power-frequency electric strength

Is the panel builder's responsibility.

10.9 Insulation properties

10.9.3 Impulse withstand voltage

Is the panel builder's responsibility.

10.9 Insulation properties

10.9.4 Testing of enclosures made of insulating material

Is the panel builder's responsibility.

10.10 Temperature rise

The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.

10.11 Short-circuit rating

Is the panel builder's responsibility. The specifications for the switchgear must be observed.

10.12 Electromagnetic compatibility
Is the panel builder's responsibility. The specifications for the switchgear must be observed.

10.13 Mechanical function
The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

TECHNICAL DATA ETIM 7.0

Low-voltage industrial components (EG000017) / Switch disconnector (EC000216)

Electric engineering, automation, process control engineering / Low-voltage switch technology / Off-load switch, circuit breaker, control switch / Switch disconnector (ecl@ss10.0.1-27-37-14-03 [AKF060013])

Version as main switch
Yes

Version as maintenance-/service switch
Yes

Version as safety switch
No

Version as emergency stop installation
Yes

Version as reversing switch
No

Number of switches
1

Max. rated operation voltage Ue AC
0 V

Rated operating voltage
1000 - 1000 V

Rated permanent current I_u

200 A

Rated permanent current at AC-23, 400 V
0 A

Rated permanent current at AC-21, 400 V
0 A

Rated operation power at AC-3, 400 V
0 kW

Rated short-time withstand current I_{cw}
3.6 kA

Rated operation power at AC-23, 400 V
0 kW

Switching power at 400 V
0 kW

Conditioned rated short-circuit current I_q
0 kA

Number of poles
4

Number of auxiliary contacts as normally closed
contact
0

Number of auxiliary contacts as normally open
contact
0

Number of auxiliary contacts as change-over
contact
0

Motor drive optional
Yes

Motor drive integrated
No

Voltage release optional

Yes

Device construction

Built-in device fixed built-in technique

Suitable for ground mounting

Yes

Suitable for front mounting 4-hole

No

Suitable for front mounting centre

No

Suitable for distribution board installation

Yes

Suitable for intermediate mounting

Yes

Colour control element

Black

Type of control element

Rocker lever

Interlockable

Yes

Type of electrical connection of main circuit


Screw connection

Degree of protection (IP), front side

IP20

Degree of protection (NEMA)

DIMENSIONS



- Blow out area, minimum clearance to other parts
- 90 mm
- Minimum clearance to adjacent parts 5 mm
- Does not apply to DC applications

