



265715

NZMB2-M125



Overview



Specifications



Resources



## DELIVERY PROGRAM

[Delivery program >](#)

Product range  
Circuit-breaker

[Technical data >](#)

Protective function  
Motor protection

[Design verification as  
per IEC/EN 61439 >](#)



[Technical data ETIM 7.0  
>](#)

Standard/Approval  
IEC

[Characteristics >](#)

Installation type  
Fixed

[Dimensions >](#)

Release system  
Thermomagnetic release

Construction size  
NZM2

Description  
Tripping class 10 A  
IEC/EN 60947-4-1, IEC/EN 60947-2  
The circuit-breaker fulfills all requirements for AC-3 switching category.

Number of poles  
3 pole

Standard equipment  
Screw connection

### Switching capacity

400/415 V 50 Hz [ $I_{cu}$ ]  
25 kA

Rated current = rated uninterrupted current [ $I_h = I_u$ ]  
125 A

### Setting range

Overload trip  
 [ $I_f$ ]  
100 - 125 A

Short-circuit releases  [ $I_m$ ]  
Non-delayed  [ $I_t = I_h \times \dots$ ]  
8 - 14

### Motor rating AC-3 50/60 Hz [P]

380 V 400 V [P]  
55 kW

### Motor rating AC-3 50/60 Hz [P]

400 V [P]  
55 kW

### Rated operational current AC-3 50/60 Hz [ $I_e$ ]

400 V [ $I_e$ ]  
99 A

## TECHNICAL DATA

### General

Standards  
IEC/EN 60947

Protection against direct contact  
Finger and back of hand proof to VDE 0106 Part  
100

Climatic proofing  
Damp heat, constant, to IEC 60068-2-78  
Damp heat, cyclic, to IEC 60068-2-30

Ambient temperature  
Ambient temperature, storage  
- 40 - + 70 °C

Ambient temperature  
Operation  
-25 - +70 °C

Mechanical shock resistance (10 ms half-sinusoidal shock) according to IEC 60068-2-27  
20 (half-sinusoidal shock 20 ms) g


Safe isolation to EN 61140  
Between auxiliary contacts and main contacts  
500 V AC

Safe isolation to EN 61140  
between the auxiliary contacts  
300 V AC

Mounting position

Vertical and 90° in all directions

With XFI earth-fault release:

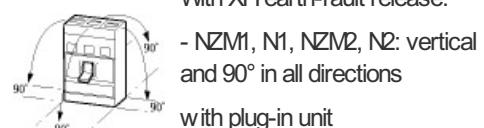

- NZM1, N1, NZM2, N2: vertical and 90° in all directions

with plug-in unit

- NZM1, N1, NZM2, N2:  
vertical, 90° right/left  
with withdrawable unit:
  - NZM3, N3: vertical, 90° right/left
  - NZM4, N4: vertical
- with remote operator:
  - NZM2, N(S)2, NZM3, N(S)3, NZM4, N(S)4: vertical and 90° in all directions

Direction of incoming supply  
as required

Degree of protection  
Device  
In the operating controls area: IP20 (basic degree of protection)

Degree of protection  
Enclosures  
With insulating surround: IP40  
With door coupling rotary handle: IP66

Degree of protection  
Terminations  
Tunnel terminal: IP10  
Phase isolator and strip terminal: IP00

Other technical data (sheet catalogue)  
Temperature dependency, Derating

## Circuit-breakers

Rated current = rated uninterrupted current [ $I_h = I_u$ ]  
125 A

Rated surge voltage invariability [ $U_{imp}$ ]  
Main contacts  
8000 V

Rated surge voltage invariability [ $U_{imp}$ ]  
Auxiliary contacts  
6000 V

Rated operational voltage [ $U_e$ ]  
440 V AC

Overvoltage category/pollution degree  
III/3

Rated insulation voltage [ $U_r$ ]  
690 V

Use in unearthed supply systems  
 440 V

## Switching capacity

Rated short-circuit making capacity [ $I_{cm}$ ]  
240 V [ $I_{cm}$ ]  
63 kA

Rated short-circuit making capacity [ $I_{cm}$ ]  
400/415 V [ $I_{cm}$ ]  
53 kA

Rated short-circuit making capacity [ $I_{cm}$ ]  
440 V 50/60 Hz [ $I_{cm}$ ]  
53 kA

Rated short-circuit breaking capacity  $I_{cn}$  [ $I_{cn}$ ]  
Icu to IEC/EN 60947 test cycle O-t-OO [ $I_{cu}$ ]  
240 V 50/60 Hz [ $I_{cu}$ ]  
30 kA

Rated short-circuit breaking capacity  $I_{cn}$  [ $I_{cn}$ ]  
Icu to IEC/EN 60947 test cycle O-t-OO [ $I_{cu}$ ]  
400/415 V 50/60 Hz [ $I_{cu}$ ]  
25 kA

Rated short-circuit breaking capacity  $I_{cn}$  [ $I_{cn}$ ]  
Icu to IEC/EN 60947 test cycle O-t-OO [ $I_{cu}$ ]  
440 V 50/60 Hz [ $I_{cu}$ ]  
25 kA

Rated short-circuit breaking capacity  $I_{cn}$  [ $I_{cn}$ ]  
Ics to IEC/EN 60947 test cycle O-t-OO-t-OO [ $I_{cs}$ ]  
240 V 50/60 Hz [ $I_{cs}$ ]  
30 kA

Rated short-circuit breaking capacity  $I_{cn}$  [ $I_{cn}$ ]  
Ics to IEC/EN 60947 test cycle O-t-OO-t-OO [ $I_{cs}$ ]  
400/415 V 50/60 Hz [ $I_{cs}$ ]  
25 kA

Rated short-circuit breaking capacity  $I_{cn}$  [ $I_{cn}$ ]  
Ics to IEC/EN 60947 test cycle O-t-CC-t-CC [ $I_{cs}$ ]  
440 V 50/60 Hz [ $I_{cs}$ ]  
18.5 kA

Rated short-circuit breaking capacity  $I_{cn}$  [ $I_{cn}$ ]  
Maximum back-up fuse, if the expected short-circuit currents at the installation location exceed the switching capacity of the circuit-breaker.

Utilization category to IEC/EN 60947-2  
A

Lifespan, mechanical (of which max. 50 % trip by shunt/undervoltage release) [Operations]  
20000

Lifespan, electrical  
AC-1  
400 V 50/60 Hz [Operations]  
10000

Lifespan, electrical  
AC-1  
415 V 50/60 Hz [Operations]  
7500

Lifespan, electrical  
Max. operating frequency  
120 Ops/h

Total break time at short-circuit  
< 10 ms

## Terminal capacity

Standard equipment  
Screw connection

Optional accessories  
Box terminal  
Tunnel terminal  
connection on rear

Round copper conductor  
Box terminal

Solid  
1 x (10 - 16)  
2 x (6 - 16) mm<sup>2</sup>

Round copper conductor  
Box terminal  
Stranded  
1 x (25 - 185)  
2 x (25 - 70) mm<sup>2</sup>

Round copper conductor  
Tunnel terminal  
Solid  
1 x 16 mm<sup>2</sup>

Round copper conductor  
Tunnel terminal  
Stranded  
1-hole  
1 x (25 - 185) mm<sup>2</sup>

Round copper conductor  
Bolt terminal and rear-side connection  
Direct on the switch  
Solid  
1 x (10 - 16)  
2 x (6 - 16) mm<sup>2</sup>

Round copper conductor  
Bolt terminal and rear-side connection  
Direct on the switch  
Stranded  
1 x (25 - 185)  
2 x (25 - 70) mm<sup>2</sup>

Al circular conductor  
Tunnel terminal  
Solid  
1 x 16 mm<sup>2</sup>

Al circular conductor  
Tunnel terminal  
Stranded  
Stranded  
1 x (25 - 185) mm<sup>2</sup>

Al circular conductor  
Bolt terminal and rear-side connection  
Direct on the switch  
Solid  
1 x (10 - 16)  
2 x (10 - 16) mm<sup>2</sup>

Al circular conductor  
Bolt terminal and rear-side connection  
Direct on the switch  
Stranded  
1 x (25 - 50)  
2 x (25 - 50) mm<sup>2</sup>

Cu strip (number of segments x width x segment thickness)  
Box terminal [min.]  
2 x 9 x 0.8 mm

Cu strip (number of segments x width x segment thickness)  
Box terminal [max.]  
10 x 16 x 0.8  
(2x) 8 x 15.5 x 0.8 mm

Cu strip (number of segments x width x segment thickness)  
Bolt terminal and rear-side connection  
Flat copper strip, with holes [min.]  
2 x 16 x 0.8 mm

Cu strip (number of segments x width x segment thickness)  
Bolt terminal and rear-side connection  
Flat copper strip, with holes [max.]  
10 x 24 x 0.8 mm

Copper busbar (width x thickness) [mm]  
Bolt terminal and rear-side connection  
Screw connection  
M8

Copper busbar (width x thickness) [mm]  
Bolt terminal and rear-side connection  
Direct on the switch [min.]  
16 x 5 mm

Copper busbar (width x thickness) [mm]  
Bolt terminal and rear-side connection  
Direct on the switch [max.]  
24 x 8 mm

Control cables  
1 x (0.75 - 2.5)  
2 x (0.75 - 1.5) mm<sup>2</sup>

# DESIGN VERIFICATION AS PER IEC/EN 61439

## Technical data for design verification

Rated operational current for specified heat dissipation [ $I_h$ ]  
125 A

Equipment heat dissipation, current-dependent [ $P_{vid}$ ]  
27.61 W

Operating ambient temperature min.  
-25 °C

Operating ambient temperature max.  
+70 °C

## IEC/EN 61439 design verification

10.2 Strength of materials and parts  
10.2.2 Corrosion resistance  
Meets the product standard's requirements.

10.2 Strength of materials and parts  
10.2.3.1 Verification of thermal stability of enclosures  
Meets the product standard's requirements.

10.2 Strength of materials and parts  
10.2.3.2 Verification of resistance of insulating materials to normal heat  
Meets the product standard's requirements.

10.2 Strength of materials and parts  
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects  
Meets the product standard's requirements.

10.2 Strength of materials and parts  
10.2.4 Resistance to ultra-violet (UV) radiation  
Meets the product standard's requirements.

10.2 Strength of materials and parts  
10.2.5 Lifting  
Does not apply, since the entire switchgear needs

to be evaluated.

10.2 Strength of materials and parts

10.2.6 Mechanical impact

Does not apply, since the entire switchgear needs to be evaluated.

10.2 Strength of materials and parts

10.2.7 Inscriptions

Meets the product standard's requirements.

10.3 Degree of protection of ASSEMBLIES

Does not apply, since the entire switchgear needs to be evaluated.

10.4 Clearances and creepage distances

Meets the product standard's requirements.

10.5 Protection against electric shock

Does not apply, since the entire switchgear needs to be evaluated.

10.6 Incorporation of switching devices and

components

Does not apply, since the entire switchgear needs to be evaluated.

10.7 Internal electrical circuits and connections

Is the panel builder's responsibility.

10.8 Connections for external conductors

Is the panel builder's responsibility.

10.9 Insulation properties

10.9.2 Power-frequency electric strength

Is the panel builder's responsibility.

10.9 Insulation properties

10.9.3 Impulse withstand voltage

Is the panel builder's responsibility.

10.9 Insulation properties

10.9.4 Testing of enclosures made of insulating

material

Is the panel builder's responsibility.

10.10 Temperature rise

The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.

**10.11 Short-circuit rating**  
Is the panel builder's responsibility. The specifications for the switchgear must be observed.

**10.12 Electromagnetic compatibility**  
Is the panel builder's responsibility. The specifications for the switchgear must be observed.

**10.13 Mechanical function**  
The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

## TECHNICAL DATA ETIM 7.0

Low-voltage industrial components (EG000017) / Motor protection circuit-breaker (EO000074)

Electric engineering, automation, process control engineering / Low-voltage switch technology / Circuit breaker (LV < 1 kV) / Motor protection circuit-breaker (ec1@ss10.0.1-27-37-04-01 [AGZ529016])

Overload release current setting  
100 - 125 A

Adjustment range undelayed short-circuit release  
1000 - 1750 A

With thermal protection  
Yes

Phase failure sensitive  
No

Switch off technique  
Thermomagnetic

Rated operating voltage  
440 - 440 V

Rated permanent current  $I_{\text{u}}$   
125 A

Rated operation power at AC-3, 230 V  
37 kW

Rated operation power at AC-3, 400 V  
55 kW

Type of electrical connection of main circuit  
Screw connection

Type of control element  
Rocker lever

Device construction  
Built-in device fixed built-in technique

With integrated auxiliary switch  
No

With integrated under voltage release  
No

Number of poles  
3

Rated short-circuit breaking capacity  $I_{\text{cu}}$  at 400 V,  
AC  
25 kA

Degree of protection (IP)  
IP20

Height  
184 mm

Width  
105 mm

Depth  
149 mm

## CHARACTERISTICS

Characteristic curve



Characteristic curve



Let-through current

Characteristic curve



Let-through energy

## DIMENSIONS



- Blow out area, minimum clearance to adjacent parts
- Minimum clearance to adjacent parts





[Imprint](#) | [Privacy Policy](#) | [Legal Disclaimer](#) | [Terms and Conditions](#)  
© 2022 by Eaton Industries GmbH