

**Door sealing frame, IP41, fixed mounted design**

**Part no.** IZMX-DEG40-F-1  
**Catalog No.** 184137  
**Alternate Catalog No.** 68D2793G12  
**EL-Nummer (Norway)** 4398500

**Delivery program**


|               |  |  |  |
|---------------|--|--|--|
| Product range |  |  | Accessories  |
| Accessories   |  |  | Degree of protection IP31                            |
| Accessories   |  |  | Spare door seal                                      |
|               |  |  | Replacement door escutcheon with gasket IP31         |
| For use with  |  |  | IZMX40...F<br>INX40...F                              |
| Instructions  |  |  | Spare part; supplied as standard with every breaker. |

**Design verification as per IEC/EN 61439**

|  |  |    |     |
|--|--|----|-----|
| Technical data for design verification |  |    |     |
| Operating ambient temperature min.     |  | °C | -25 |
| Operating ambient temperature max.     |  | °C | 70  |

**Technical data ETIM 7.0**

|   |  |  |       |
|---|--|--|-------|
| Low-voltage industrial components (EG000017) / Accessories for low-voltage switch technology (EC002498)   |  |  |       |
| Electric engineering, automation, process control engineering / Low-voltage switch technology / Component for low-voltage switching technology / Component for low-voltage switch technology (accessories) (ecl@ss10.0.1-27-37-13-92 [AKN570013]) |  |  |       |
| Type of accessory   |  |  | Other |

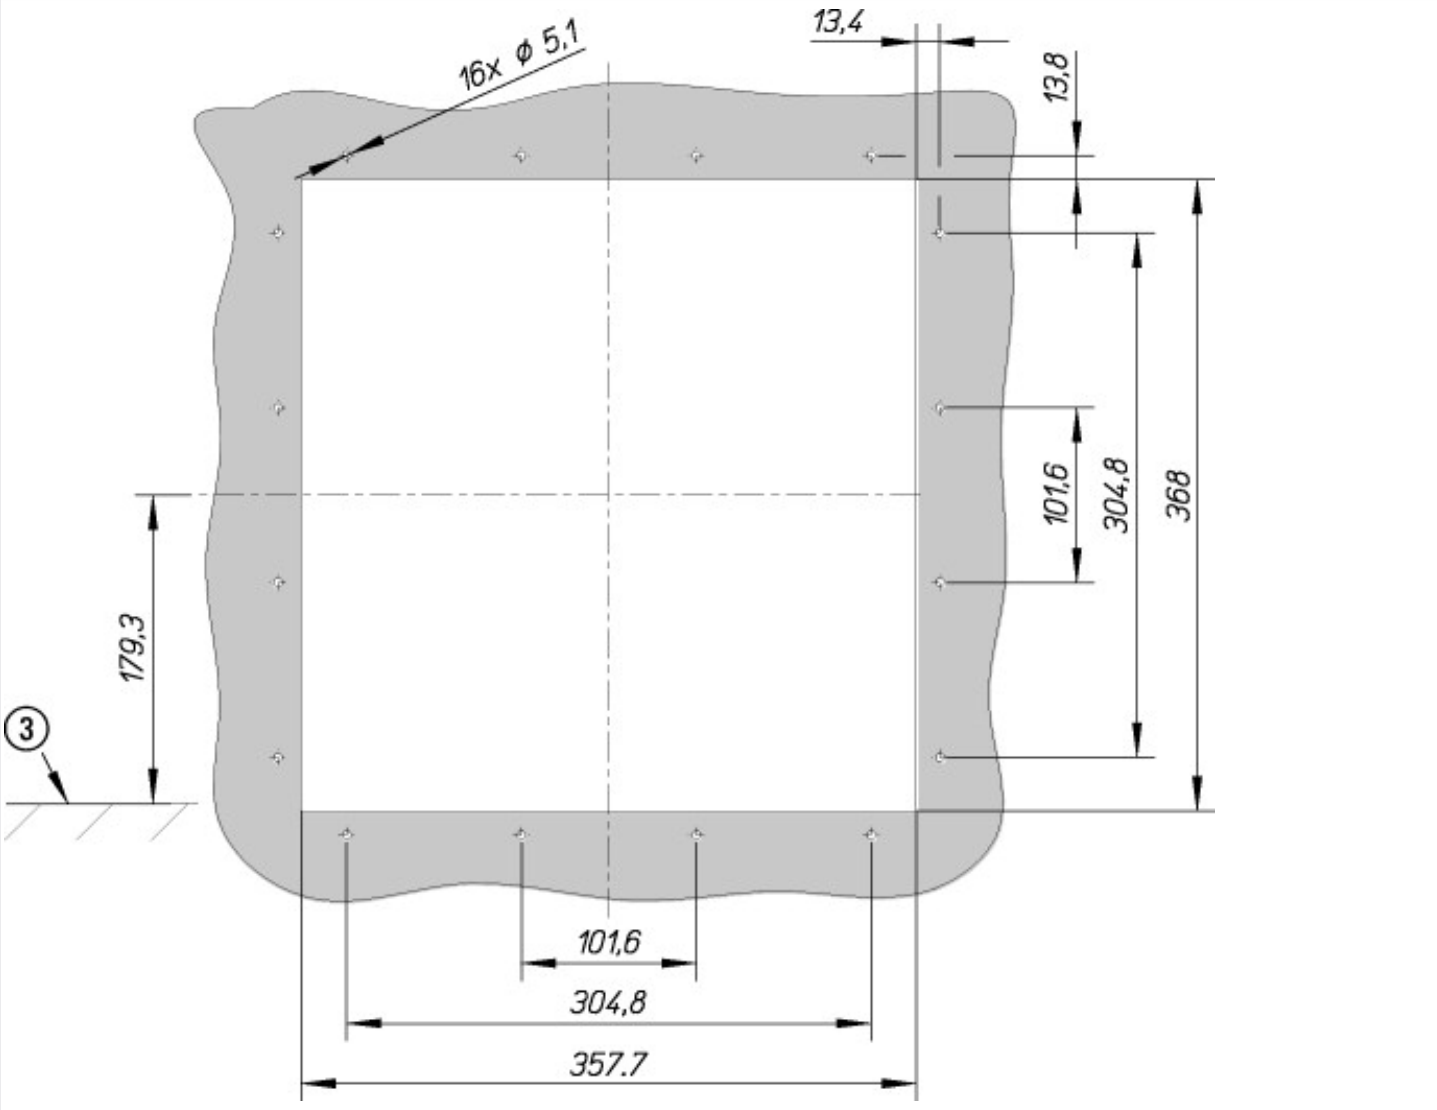

③ Top edge mounting floor of the Circuit Breaker