

## Wood burning heater Harvia Pro 20 Duo Steel

WK200SLUX

The Harvia 20 Duo stove is a unique 2-in-1 solution that combines a wood-heated STOVE AND A FIREPLACE. Heating up the stove lets you enjoy the atmosphere in two rooms. Heat up your sauna to bathing temperature and enjoy the pleasant atmosphere of the fireplace at the same time. The wood-heated stove creates a traditional sauna atmosphere and gives off great steam. After the sauna, you can enjoy the afterheat in the fireplace room, cook sausages and enjoy refreshments... and then hit the sauna again. Style is also one of Duo's strengths: the outer casing is made of high-quality stainless steel, the stove features an impressive and robust glass door and the stove technology is created by the world's largest sauna stove manufacturer with more than 60 years of experience. Duo is more than the sum of its parts.



### Features

Main material : Steel

H x W x D : 760.0 x 430.0 x 510.0 mm

Net weight (kg) : 76.5

Stone amount (kg) : 40.0

ID	GTIN	Power	Sauna room size min - max m3
WK200SLUX	6417659001137	24.1 kW	8.0-20.0

### Related products



WL100

## Spare parts

Product	ID	Pcs
Stainless steel frame for Duo-stoves	WX044	1
Casing, stainless steel, 20 Duo	WX045	1
Furnace grate	ZKIP-10	1
Connection pipe	ZKIP-130	1
Stove body 20 SL Duo	ZROST-300LUX	1
Air flow spoiler Pro 2019	ZROST-601	1


## Technical details

Technical data	Type / attribute	WK200SLUX
	Color	Black
	Power output	24.1 kW
	Stone sizes	10-15 cm
	Stone amount (kg)	40
Dimensions	Product width (mm)	430
	Product height (mm)	760
	Product depth (mm)	510
	Net weight (kg)	76.5
	Gross weight	85
	Package width	805
	Package height	860
	Package depth	620
Connections	Flue connection locations	Top
	Chimney connection diameter	115
Safety and installation dimensions	Safety distance front (non-combustible materials)	300
	Safety distance front (combustible materials)	300
	Safety distance right side (combustible materials)	300
	Safety distance right side non-combustible materials	100
	Safety distance left side (combustible materials)	300
	Safety distance left side non-combustible materials	100
	Safety distance behind (non-combustible materials)	100
	Safety distance behind (combustible materials)	300
	Safety distance (Ceiling) (depends on connections and therefore from output, star/delta)	1300
Room min. height(depends on connections and therefore from output, star/delta)	2060	

## Technical images

### 1.1. Stove Parts


- A. Upper connection opening
- B. Rear connection opening
- C. Soot opening
- D. Stove door
- E. Ash box

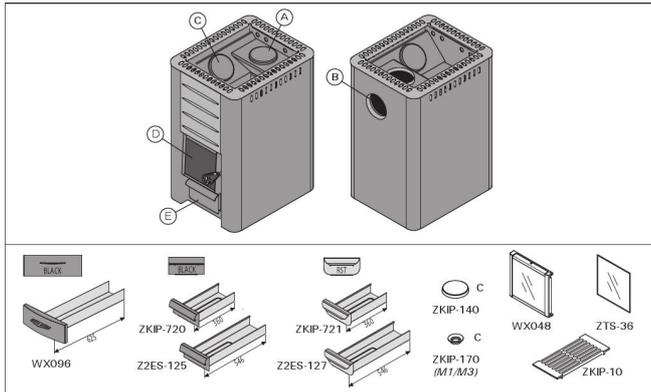

Stove parts. *Note!* Only use replacement parts recommended by the manufacturer. Unauthorised modification of the stove is prohibited.

### 3.4. Accessories

- A. Harvia steel chimney WHP1500.
- B. Water heater VL221. Installed on the top of the upper connection opening. When a protective sheath or other protection is used that is not large enough to protect the inflammable materials around the stove from the heat radiation of the pipe between the water heater and smoke flue, you must install a radiation cover around the pipe.
- C. Radiation cover WZ020130. Installed around the smoke pipe.
- D. Harvia protective sheath WX017.
- E. Harvia protective sheath WL400-WL775.
- F. Harvia protective bedding WX018, WL100. (not for models 20 RS/LS Pro, 36, 36 Duo, Premium VS, Linear 22 RS/LS, 22 RS/LS S).
- G. Harvia protective bedding WL110 (not for models 20 ES Pro/S, Linear 22 ES, 22 ES S).
- H. Angle smoke pipe. Different models.
- I. Lead-through flange for smoke pipe WZ020115. Covers the edges of the flue opening and the sealing in the wall. Made of stainless steel. Consists of two parts to make it useable with differently inclined smoke pipes.
- J. Masonry connector WZ011115. Connected to the flue opening, does not require other seals. The inner side already has a seal.

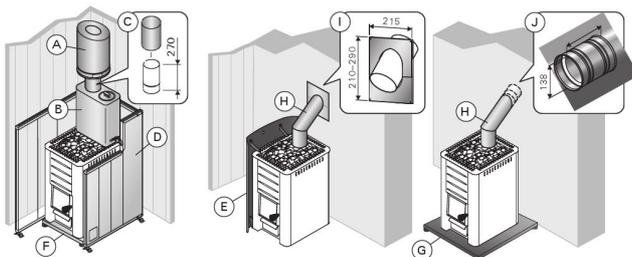

Accessories (all dimensions in millimeters)

	A min.	B min.	C min.	D min.
M1, M2, M3-SL, Classic 140	1200	250	300	300
20 Pro, 20 SL Duo, 20 ES Pro, S20 Boiler, 20 SL Boiler, Premium VS, Classic 220 Duo, 20 RS/LS Pro	1300	300	300	300
26 Pro, Classic 280	1280	375	375	375
36, 36 Duo	1250	500	500	500
Linear 16, 16	1300	300	350	400
Linear 22, 22 S, Linear 22 RS/LS ES, 22 RS/LS ES S	1265	400	380	500
Linear 28	1380	400	400	500

Safety distances (all dimensions in millimeters)

	B min.
M1, M2, M3-SL, 20 Pro, 20 SL Duo, 20 ES Pro-S, 20 Boiler, 20 SL Boiler, Premium, Classic 140-SL, Classic 220 Duo	300
26 Pro, Classic 280	375
Linear 16, 16	300
Linear 22/28, Linear 22 ES, 22 ES S, 22 S	400

	B min.	C min.	D min.	F
WL400/WL450	50	50	300	30
WL500/WL550	62	62	422	30
WL600/WL650	73	73	526	30
WL700/WL750	90	90	700	30
WL500/WL590	62	62	422	30
WL425/WL475	30	30	400	32
WL525/WL575	70	70	500	40
WL525/WL585				
WL530/WL580				
WL725/WL775				

Safety distances with protective sheaths (all dimensions in millimeters)