



Current/voltage measuring module V2; Set current 3...40 A, Voltage measurement up to 690 V, Overall width 45 mm, Straight-through transformer, basic unit required pro V PB, pro V MR, pro V PN or pro V EIP

<b>product brand name</b>	SIRIUS
<b>product designation</b>	Current/voltage measuring module
<b>General technical data</b>	
<b>product function</b>	
• current measurement	Yes
• voltage measurement	Yes
• active power measurement	Yes
• power measurement	Yes
• frequency measurement	Yes
<b>measuring procedure for current measurement</b>	TRMS
<b>current measuring range extension with external current transformers</b>	Yes
<b>measuring procedure for voltage measurement</b>	TRMS
<b>measurable supply voltage between the line conductors at AC maximum rated value</b>	690 V
<b>line conductors and neutral conductors internal resistance for voltage measurement</b>	1 MΩ; RC-based voltage divider
<b>product component</b>	
• input for thermistor connection	No
<b>consumed active power</b>	0.5 W
<b>insulation voltage</b>	
• with degree of pollution 3 at AC rated value	690 V
• for wires of main circuit according to IEC 60947-1 rated value	6 kV
<b>surge voltage resistance rated value</b>	6 000 V
<b>protection class IP</b>	IP20
shock resistance according to IEC 60068-2-27	15g / 11 ms; with basic unit snapped on
<b>vibration resistance</b>	1-6 Hz / 15 mm; 6-500 Hz / 2 g; with basic unit snapped on: 1g
<b>reference code according to IEC 81346-2</b>	F
<b>Substance Prohibitance (Date)</b>	05/28/2009
<b>certificate of suitability</b>	
• according to ATEX directive 2014/34/EU	BVS 06 ATEX F001
explosion device group and category according to ATEX directive 2014/34/EU	II (2) G, II (2) D, I (M2)
<b>Electromagnetic compatibility</b>	
EMC emitted interference according to IEC 60947-1	class A
EMC immunity according to IEC 60947-1	corresponds to degree of severity 3
<b>conducted interference</b>	
• due to burst according to IEC 61000-4-4	2 kV
• due to conductor-earth surge according to IEC 61000-4-5	2 kV

<ul style="list-style-type: none"> <li>• due to conductor-conductor surge according to IEC 61000-4-5</li> </ul>	1 kV
<b>field-based interference according to IEC 61000-4-3</b>	10 V/m
<b>Inputs/ Outputs</b>	
<b>number of outputs as contact-affected switching element</b>	0
<b>Protective and monitoring functions</b>	
<b>product function</b>	
<ul style="list-style-type: none"> <li>• power factor monitoring</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• ground-fault monitoring</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• voltage detection</li> </ul>	Yes
<b>product function</b>	
<ul style="list-style-type: none"> <li>• current detection</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• overload protection</li> </ul>	Yes
<b>Precision</b>	
<b>measuring precision</b>	
<ul style="list-style-type: none"> <li>• of frequency measurement</li> </ul>	+/- 1.5 %, 2.25 A ... 80 A, 0.85 x 110 V ... 1.1 x 690 V (line-to-line voltages), cos phi (0.5...1), 50/60 Hz, 25 °C
<ul style="list-style-type: none"> <li>• for current measurement 1</li> </ul>	+/- 1.5 %, in range 2.25 A ... 80 A, in range 0.85 x 110 V ... 1.1 x 690 V (line-to-line voltages), 50/60 Hz, 25 °C
<ul style="list-style-type: none"> <li>• for current measurement 2</li> </ul>	+/- 3%, in range 80 A ... 320 A, in range 0.85 x 110 V ... 1.1 x 690 V (line-to-line voltages), 50/60 Hz, 25 °C
<ul style="list-style-type: none"> <li>• for voltage measurement 1</li> </ul>	+/- 1.5 %, in range 0.85 x 110 V ... 1.1 x 690 V (line-to-line voltages), 50/60 Hz, 25 °C
<ul style="list-style-type: none"> <li>• at cos phi-measurement 1</li> </ul>	+/- 1.5 %, 7.5 A ... 230 A, 0.85 x 110 V ... 1.1 x 690 V (line-to-line voltages), cos phi (0.5...1), 50/60 Hz, 25 °C
<ul style="list-style-type: none"> <li>• at cos phi-measurement 2</li> </ul>	+/- 5%, 80 A ... 320 A, 0.85 x 110 V ... 1.1 x 690 V (line-to-line voltages), cos-phi (0.5...1), 50/60 Hz, 25 °C
<ul style="list-style-type: none"> <li>• at active power measurement 1</li> </ul>	+/- 5%, 7.5 A ... 230 A, 0.85 x 110 V ... 1.1 x 690 V (line-to-line voltages), cos-phi (0.5...1), 50/60 Hz, 25 °C
<ul style="list-style-type: none"> <li>• at active power measurement 2</li> </ul>	+/- 10%, 80 A ... 320 A, 0.85 x 110 V ... 1.1 x 690 V (line-to-line voltages), cos-phi (0.5...1), 50/60 Hz, 25 °C
<ul style="list-style-type: none"> <li>• at energy measurement 1</li> </ul>	+/- 5%, 2.25 A ... 80 A, 0.85 x 110 V ... 1.1 x 690 V (line-to-line voltages), cos-phi (0.5...1), 50/60 Hz, 25 °C
<ul style="list-style-type: none"> <li>• at energy measurement 2</li> </ul>	+/- 10%, 80 A ... 320 A, 0.85 x 110 V ... 1.1 x 690 V (line-to-line voltages), cos-phi (0.5...1), 50/60 Hz, 25 °C
<ul style="list-style-type: none"> <li>• at apparent power measurement 1</li> </ul>	+/- 3%, 2.25 A ... 80 A, 0.85 x 110 V ... 1.1 x 690 V (line-to-line voltages), cos-phi (0.5...1), 50/60 Hz, 25 °C
<ul style="list-style-type: none"> <li>• at apparent power measurement 2</li> </ul>	+/- 5 %, 80 A ... 320 A, 0.85 x 110 V ... 1.1 x 690 V (line-to-line voltages), cos phi (0.5...1), 50/60 Hz, 25 °C
<b>accuracy of ground-fault monitoring</b>	In the range 30 % .. 120 %/Is: +/- 10 % (Class CI-A), in range 15 % .. 30 % Ie: +/- 25 % (Class CI-B), both values acc. to IEC 60947-1 Annex T
<b>temperature drift per °C</b>	0.01 %/°C; Reference temperature: 25°C
<b>measured variable frequency</b>	45 ... 65 Hz
<b>Installation/ mounting/ dimensions</b>	
<b>mounting position</b>	any
<b>fastening method</b>	screw and snap-on mounting
<b>height</b>	84 mm
<b>width</b>	45 mm
<b>depth</b>	64 mm
<b>required spacing</b>	
<ul style="list-style-type: none"> <li>• top</li> </ul>	30 mm
<ul style="list-style-type: none"> <li>• bottom</li> </ul>	30 mm
<ul style="list-style-type: none"> <li>• left</li> </ul>	0 mm
<ul style="list-style-type: none"> <li>• right</li> </ul>	0 mm
<b>diameter of inlet opening</b>	7.5 mm
<b>diameter of inlet opening for current measurement</b>	7.5 mm
<b>Connections/ Terminals</b>	
<b>type of electrical connection at the measurement inputs for voltage</b>	screw-type terminals
<b>type of connectable conductor cross-sections at the measurement inputs for voltage</b>	
<ul style="list-style-type: none"> <li>• finely stranded with core end processing</li> </ul>	1x (0.25 ... 2.5 mm²), 2x (0.25 ... 1.0 mm²)

<ul style="list-style-type: none"> <li>• solid</li> <li>• at AWG cables solid</li> <li>• at AWG cables stranded</li> </ul>	1x (0.25 ... 2.5 mm <sup>2</sup> ), 2x (0.25 ... 1.0 mm <sup>2</sup> ) 1x (24 ... 14), 2x (24 ... 18) 1x (20 ... 14), 2x (20 ... 16)
<b>tightening torque at the measurement inputs for voltage</b>	0.5 ... 0.6 N·m
<b>tightening torque [lbf·in] at the measurement inputs for voltage</b>	4.4 ... 5.3 lbf·in
<b>Ambient conditions</b>	
<b>installation altitude at height above sea level</b> <ul style="list-style-type: none"> <li>• 1 maximum</li> <li>• 2 maximum</li> <li>• 3 maximum</li> </ul>	2 000 m 3 000 m; max. +50 °C (no protective separation) 4 000 m; max. +40 °C (no protective separation)
<b>ambient temperature</b> <ul style="list-style-type: none"> <li>• during operation</li> <li>• during storage</li> <li>• during transport</li> </ul>	-25 ... +60 °C -40 ... +80 °C -40 ... +80 °C
<b>environmental category</b> <ul style="list-style-type: none"> <li>• during operation according to IEC 60721</li> <li>• during storage according to IEC 60721</li> <li>• during transport according to IEC 60721</li> </ul>	3K6 (no formation of ice, no condensation, relative humidity 10 ... 95%), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6 1K6 (no condensation, relative humidity 10 ... 95%), 1C2 (no salt mist), 1S2 (sand must not get into the devices), 1M4 2K2, 2C1, 2S1, 2M2
relative humidity during operation	10 ... 95 %
<b>Short-circuit protection</b>	
<b>product function short circuit protection</b>	No
<b>Galvanic isolation</b>	
<b>(electrically) protective separation according to IEC 60947-1</b>	All circuits with protective separation (double creepage paths and clearances), the information in the "Protective Separation" test report, No. A0258, must be observed (link see further information)
<b>Main circuit</b>	
<b>number of poles for main current circuit</b>	3
<b>adjustable current response value current of the current-dependent overload release</b>	3 ... 40 A
<b>operating voltage</b> <ul style="list-style-type: none"> <li>• at AC <ul style="list-style-type: none"> <li>— at 50 Hz rated value</li> <li>— at 60 Hz rated value</li> </ul> </li> </ul>	110 ... 690 V 110 ... 690 V
<b>operating frequency rated value</b>	50 ... 60 Hz
<b>Control circuit/ Control</b>	
<b>type of voltage</b>	AC
<b>inrush current maximum</b>	400 A; 10 x I <sub>o</sub>
<b>Certificates/ approvals</b>	
General Product Approval	
EMC	



[Confirmation](#)



For use in hazardous locations	Declaration of Conformity	Test Certificates
--------------------------------	---------------------------	-------------------



[Type Test Certificates/Test Report](#)

Test Certificates	Marine / Shipping
-------------------	-------------------

[Special Test Certificate](#)

[Special Test Certificate](#)



#### other

[Confirmation](#)



[PROFINET-Certification](#)

#### Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3UF7111-1AA01-0>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3UF7111-1AA01-0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/ww/en/ps/3UF7111-1AA01-0>


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3UF7111-1AA01-0&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3UF7111-1AA01-0&lang=en)

Test report No. A0258, protective separation

<https://support.industry.siemens.com/cs/ww/en/view/109748152>

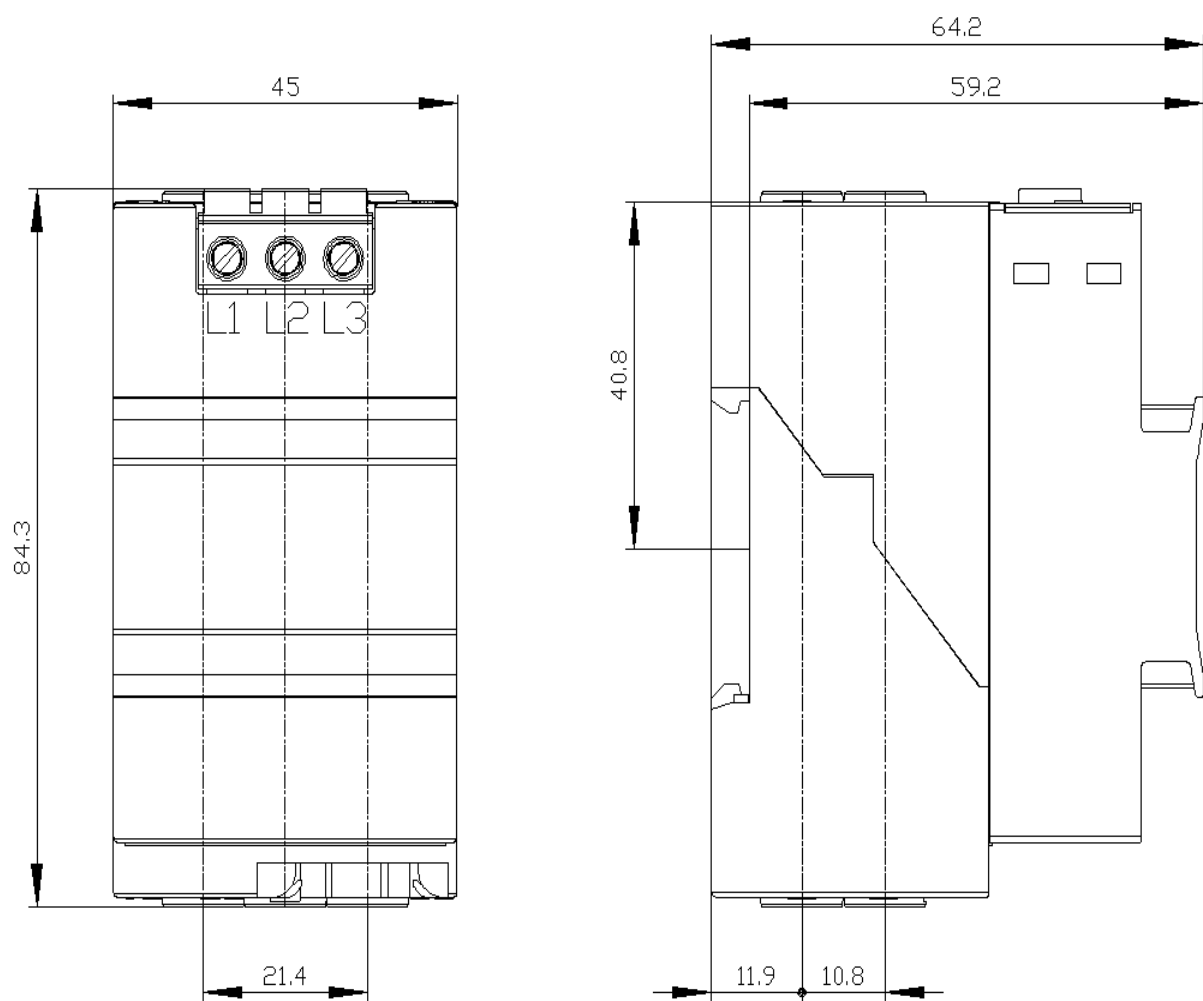

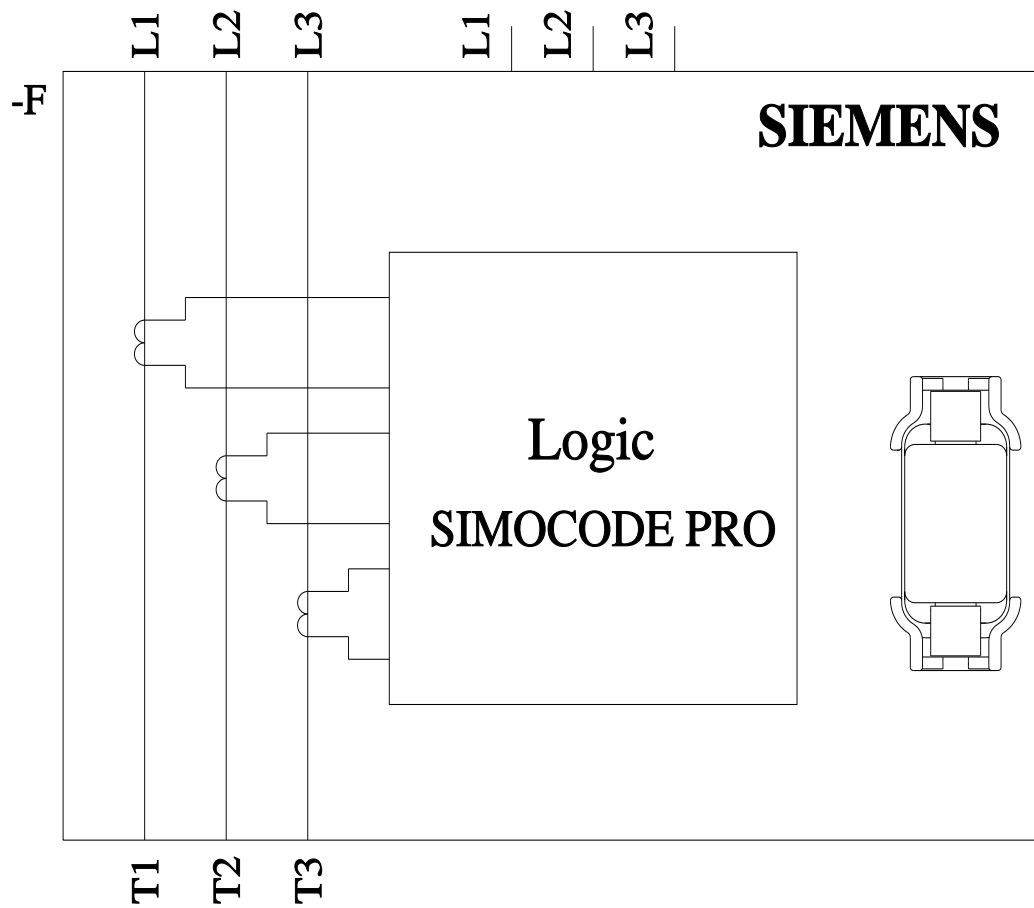

last modified:

4/7/2022 