



Data subject to change without notice. Always confirm the data is correct from the seller.

## **KEM 3125 M4EMC 2XM40MEMC**

### **EMC Switches 10-630A**

- Electromagnetic compatibility ensures safe operation in environments with electromagnetic disturbance

- Tested according to EMC EN 61000-6-3:2007+A1(2011) with EMC- glands shielded power cable
- IP66; Enclosure types M2, M3, A2, A4
- IP65; Enclosure types T5, T6, T7
- Available in polycarbonate up to 125 A, aluminium up to 160 A and sheet steel up to 630 A
- Padlockable
- EMC cable glands included
- Door interlock with defeat mechanism
- Tested according to IEC 60947-3
- Also available with 4, 6 or 8-poles
- **Note!** Al-cables cannot be connected directly to switch terminals. For Al-cable connection please use a bi-metal cable connector, **available here**.

**Technical datasheet >>**

Accessories




**PRODUCT CARD**

**MORE INFORMATION**

## PRODUCT DETAILS

|                                                           |                                |
|-----------------------------------------------------------|--------------------------------|
| SKU                                                       | KEM 3125<br>M4EMC<br>2XM40MEMC |
| AC-21 400/415 V (A)                                       | 160 A                          |
| AC-21 690 V (A)                                           | 160 A                          |
| AC-22 400/415 V (A)                                       | 125 A                          |
| AC-22 690 V (A)                                           | 125 A                          |
| AC-23 400/415 V (A/kW)                                    | 125 A / 55 kW                  |
| AC-23 690 V (A/kW)                                        | 80 A / 75 kW                   |
| Cable Area to Switch Terminal (only Cu) (mm2) / Bolt size | 6-70                           |
| Cable Gland                                               | 2xM40                          |
| Color                                                     | Standard                       |
| EAN                                                       | 6419410315491                  |
| Enclosure                                                 | M4                             |
| Enclosure Type                                            | Polycarbonate                  |
| IP Rating                                                 | 66                             |
| Number of Poles                                           | 3                              |
| Operation                                                 | Front-operated                 |
| Switch type                                               | Load Break Switch              |
| Weight (kg)                                               | 1                              |

## DIMENSIONAL DRAWING

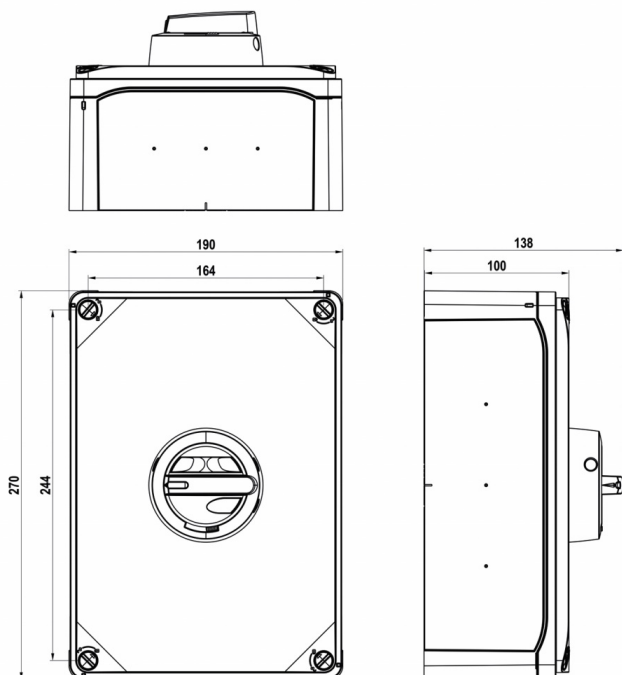

KATKO Oy  
Ruosilantie 2  
00390 Helsinki, Finland  
E-mail: [info\(at\)katko.com](mailto:info@katko.com)  
Tel: +358 (0)9 849 600

## NEWSLETTER

Email

SEND »

[LinkedIn](#) | [YouTube](#)

DOWNLOADS →

[Terms & Conditions](#)

[Manage consent](#)