


INTERRUPTORES DE CORTE CON TOMA TIERRA
SAFETY SWITCHES WITH SOLID EARTH CONNECTION

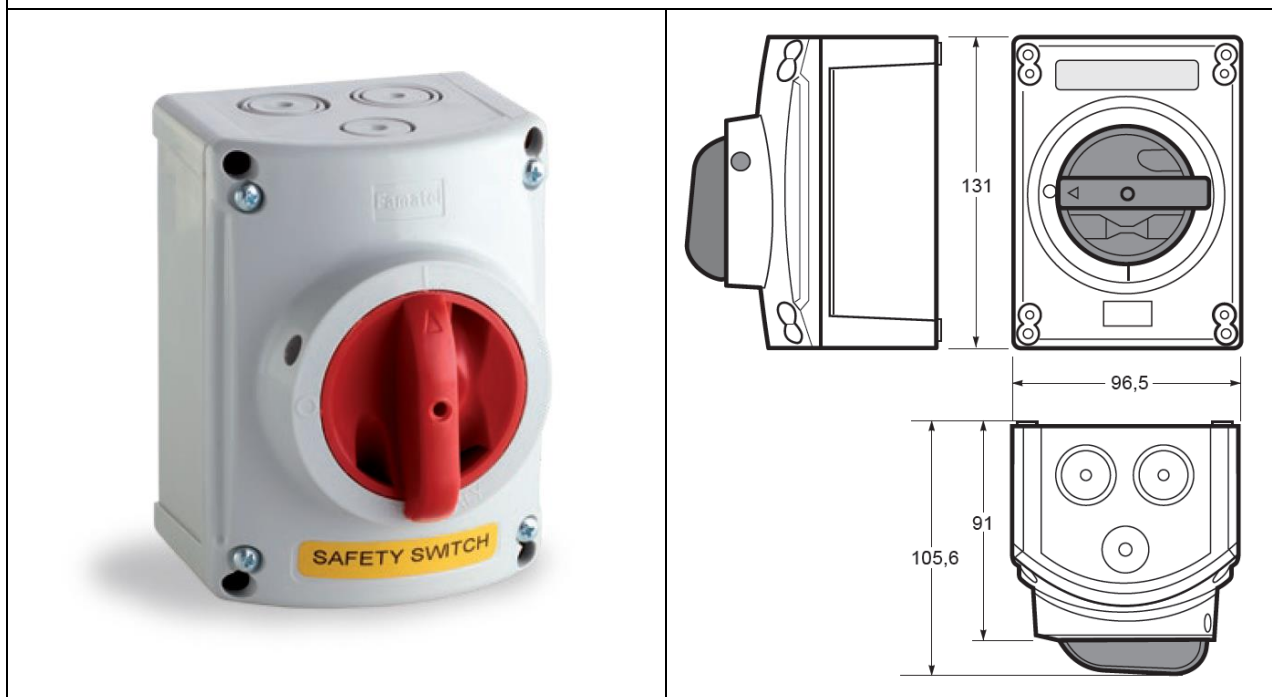

DIRECTIVA APLICADA APPLIED DIRECTIVE	2014/35/UE	
DIMENSIONES / DIMENSIONS	96,5 x 131 x 105 mm	
PESO / WEIGHT	0.310 Kg	
GRADO DE PROTECCIÓN / DEGREE OF PROTECTION	IP65	
RESISTENCIA AL IMPACTO IMPACT RESISTANCE	IK08	
ESTABILIDAD DIMENSIONAL DIMENSIONAL STABILITY	- 5 °C + 40 °C	
TEMPERATURA DE UTILIZACIÓN MÁX. OPERATING TEMPERATURE	60 °C	
RESISTENCIA HILO INCANDESCENTE RESISTANCE TO GLOW WIRE TEST	650 °C	
ELECTRICAL CHARACTERISTICS	Polos / Poles:	2P – 3P – 4P
	Tensión de aislamiento / Rated insulation voltage:	690 V~
	Impulsos de tensión / Rated voltage pulses:	6 KV
	Corriente térmica / Rated thermal current:	40 A
	Corriente cortocircuito / Rated short-circuit:	10 KA
	Frecuencia / Frequency:	50 / 60 Hz
	Sección conductores / Conductors section:	1.5 ÷ 10 mm²
NORMA / STANDARD	EN 60947-3	

QUA-016, rev.: 00

**REFERENCIAS
/ REFERENCES**

Ref.	Corriente nominal Rated current	Nº Polos/ Poles	Ref. / Item
25510	16A	2+E	
25511		2+NP+E	Neutro Sólido <i>ISolld Neutral</i>
25512		3+E	
25513		3+NP+E	Neutro Sólido <i>ISolld Neutral</i>
25514		4+E	
25515		4+NP+E	Neutro Sólido <i>ISolld Neutral</i>
25501	20A	2+E	
25516		2+NP+E	Neutro Sólido <i>ISolld Neutral</i>
25502		3+E	
25517		3+NP+E	Neutro Sólido <i>ISolld Neutral</i>
25503		4+E	
25518		4+NP+E	Neutro Sólido <i>ISolld Neutral</i>
25519	25A	2+E	
25520		2+NP+E	Neutro Sólido <i>ISolld Neutral</i>
25521		3+E	
25522		3+NP+E	Neutro Sólido <i>ISolld Neutral</i>
25523		4+E	
25524		4+NP+E	Neutro Sólido <i>ISolld Neutral</i>
25504	32A	2+E	
25525		2+NP+E	Neutro Sólido <i>ISolld Neutral</i>
25505		3+E	
25526		3+NP+E	Neutro Sólido <i>ISolld Neutral</i>
25506		4+E	
25527		4+NP+E	Neutro Sólido <i>ISolld Neutral</i>
25507	40A	2+E	
25528		2+NP+E	Neutro Sólido <i>ISolld Neutral</i>
25508		3+E	
25529		3+NP+E	Neutro Sólido <i>ISolld Neutral</i>
25509		4+E	
25530		4+NP+E	Neutro Sólido <i>ISolld Neutral</i>

QUA-016, rev.: 00

Rango de uso Range of use	Zona de utilización / Rating use Corriente nominal de utilización A / Nominal current of use A									
	Corriente nominal / Nominal current of use A									
	16		20		25		32		40	
AC23A	10A	690V	16A	690V	20A	690V	25A	690V	25A	690V
	16A	500V	20A	500V	25A	500V	32A	500V	32A	500V
AC22A	16A	690V	20A	690V	25A	690V	32A	690V	32A	690V
AC21A	16A	690V	20A	690V	25A	690V	32A	690V	40A	690V