

Art. 506T Enslavement relay

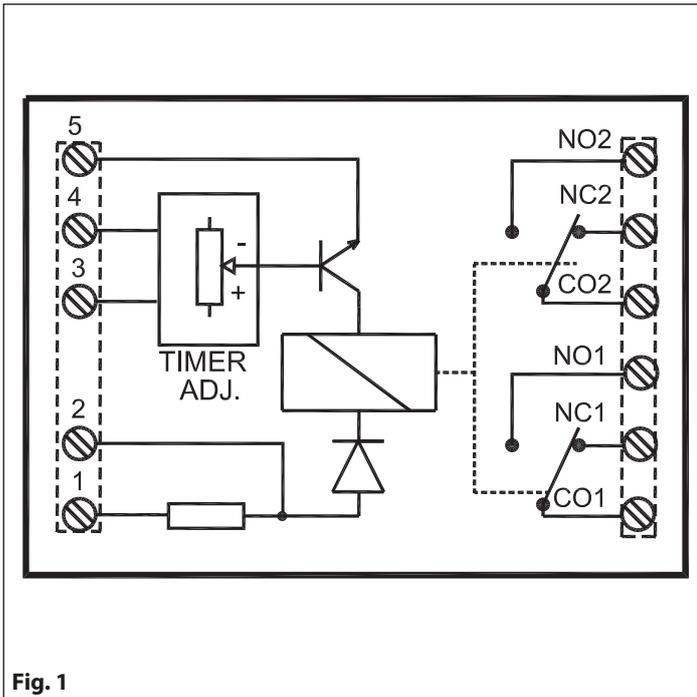


Fig. 1

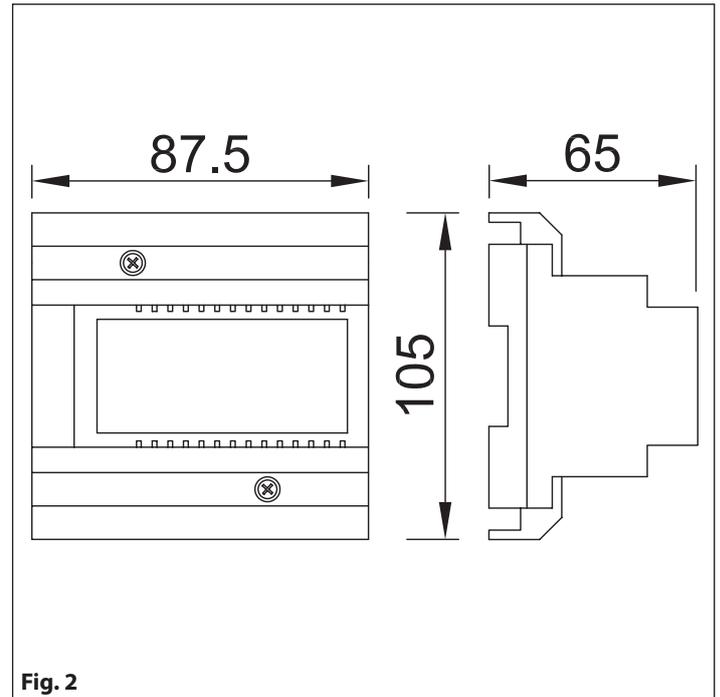


Fig. 2

DESCRIPTION

Enslavement relay (230Vac 5A max) with the timing facility from 2 to 100 seconds, it enables the control of stair lights or other power peripherals. Normally used by the service push buttons. In a standard 5 modules A type Din Box (87,5mm), can be fixed to either a DIN bar or directly to the wall using two expansion type screws.

TECHNICAL SPECIFICATION

Power consumption: 100mA Max

Working temperature: -10° +50° C

TERMINALS

1	20-24Vac or dc power input
2	12Vac or dc power input
3	Relay command input -
4	Relay command input +
5	Ground
CO1	Common 1
NC1	Norm. closed 1
NO1	Norm. open 1
CO2	Common 2
NC2	Norm. closed 2
NO2	Norm. open 2

COSTUMER SUPPORT





All Countries:
VIDEX ELECTRONICS S.P.A.
www.videx.it - technical@videx.it
 Tel: +39 0734-631669
 Fax: +39 0734-632475

UK Customers:
VIDEX SECURITY LTD
www.videx-security.com
 Tech Line: 0191 224 3174
 Fax: 0191 224 1559



The product is CE marked demonstrating its conformity and is for distribution within all member states of the EU with no restrictions. This product follows the provisions of the European Directives 2004/108/ECC (EMC); 2006/95/ECC (LVD) and 93/68/ECC (CE marking).

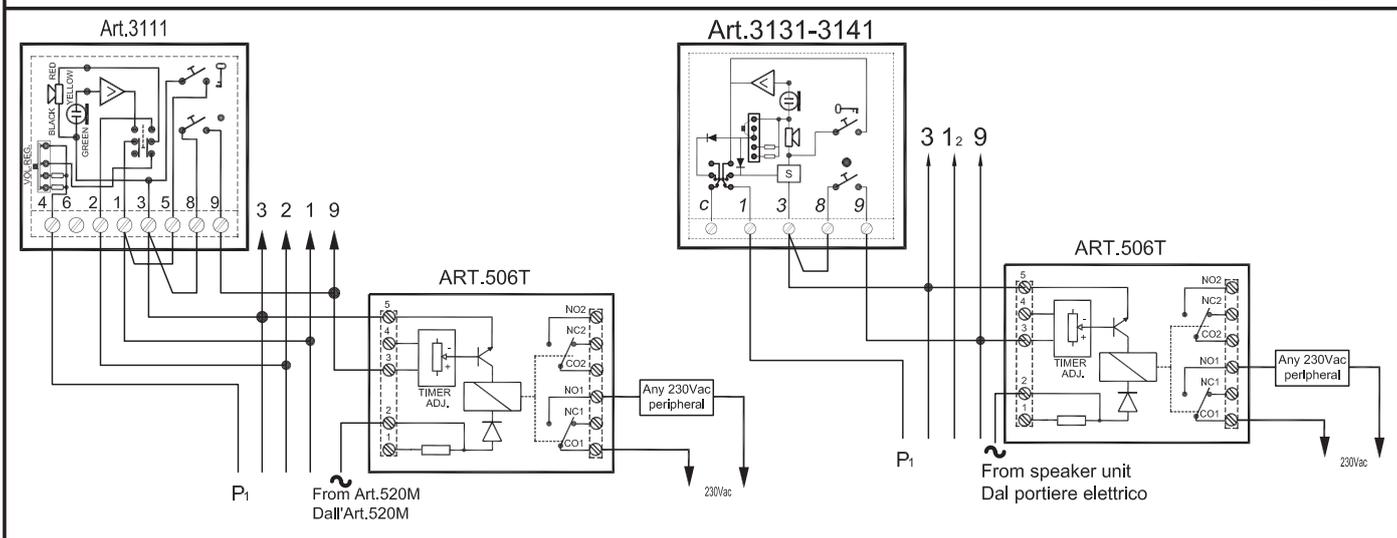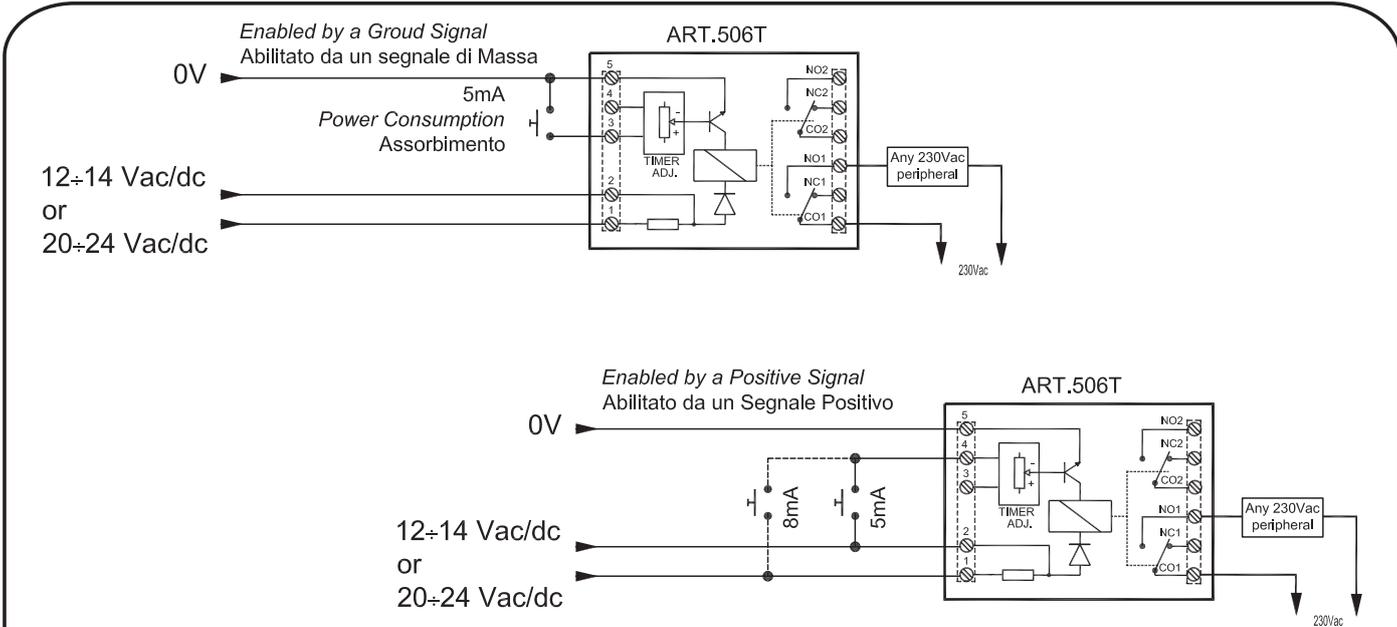

"3+1" System: using the service push button
 Sistema "3+1": utilizzo del pulsante di servizio

"1+1" System: using the service push button
 Sistema "1+1": utilizzo del pulsante di servizio

Intercommunicating System: using one of the service push button to enable an extra service

Sistema Intercomunicante: utilizzo di uno dei pulsanti di servizio per l'attivazione di un servizio extra

Art.3117

