


# OPTIC G2 QUICK ISO



Popular downlight made for the future – Optic Quick ISO in generation 2! The same low-build, made for installation in 28mm secondary spaced boarding and approved for installation directly against insulation. An easily dismantled luminaire thanks to its module system to save time when recycling. Modern LED- and reflector technology with good anti-glare light distribution with a higher lumen output than previously. Easily installed IP44 luminaire that is just as good indoors as outdoors. Tilttable 30°, which also makes it the perfect choice for sloping ceilings. Very good colour rendering, Ra>95. Newly developed driver with cover that can be adapted for cable or flex hose 16mm. Comes with 3-pole push-in terminal for through wiring and strain relief. For those wanting to control luminaires via DALI, driver comes together with Q-Box Micro. Dimmable with the most commonly available dimmers on the market.



**DOWNLIGHT BUILT  
FOR THE FUTURE**

- Long lifetime L90 100 000h Ta 25°C
- Newly developed dimmable driver with combined cover for cable or flex hose 16mm
- Replaceable LED and driver – built for the future
- Tilts 30° – perfect for angled ceilings
- Low-build, perfect for secondary spaced boarding 28mm with 13mm plaster
- Approved for installation directly against insulation
- Can be installed both indoors and outdoors

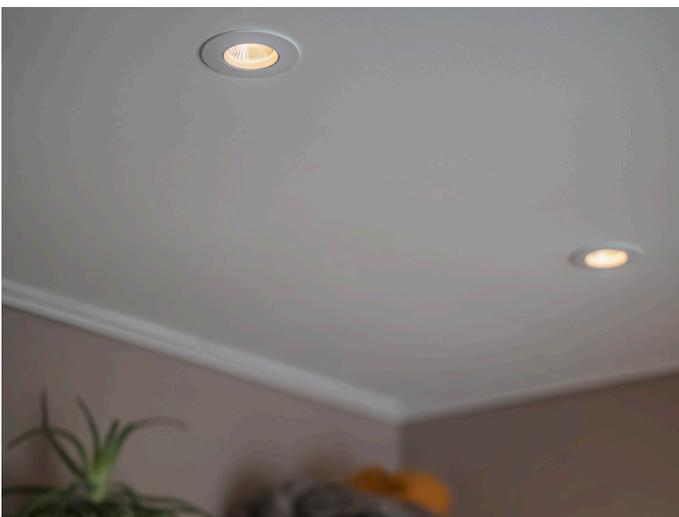




## OPTIC G2 QUICK ISO

GTIN	Color	Colour Temperature	Luminaire Lumen	Beam Angle	Power Luminaire
7392971146652 <sup>1)</sup>	Vit	Tune 2000-3000K	350lm	36°	6W
7392971146669	Vit	2700K	470lm	36°	6W
7392971146676	Vit	3000K	500lm	36°	6W
7392971146683	Vit	4000K	530lm	36°	6W
7392971146690 <sup>1)</sup>	Black	Tune 2000-3000K	350lm	36°	6W
7392971146706	Black	2700K	470lm	36°	6W
7392971146713	Black	3000K	500lm	36°	6W
7392971146720	Black	4000K	530lm	36°	6W





## OPTIC G2 QUICK ISO DALI

GTIN	Color	Colour Temperature	Luminaire Lumen	Beam Angle	Power Luminaire
7392971146768 <sup>1)</sup>	White	Tune 2000-3000K	350lm	36°	6W
7392971146775	White	2700K	470lm	36°	6W
7392971146782	White	3000K	500lm	36°	6W



## OPTIC G2 QUICK ISO 6-PACK

GTIN	Color	Colour Temperature	Luminaire Lumen	Beam Angle	Power Luminaire
7392971146737 <sup>1)</sup>	White	Tune 2000-3000K	350lm	36°	6W
7392971146744	White	2700K	470lm	36°	6W
7392971146751	White	3000K	500lm	36°	6W



Low-build, perfect for secondary spaced boarding 28mm with 13mm plaster